


HSF




ROHS

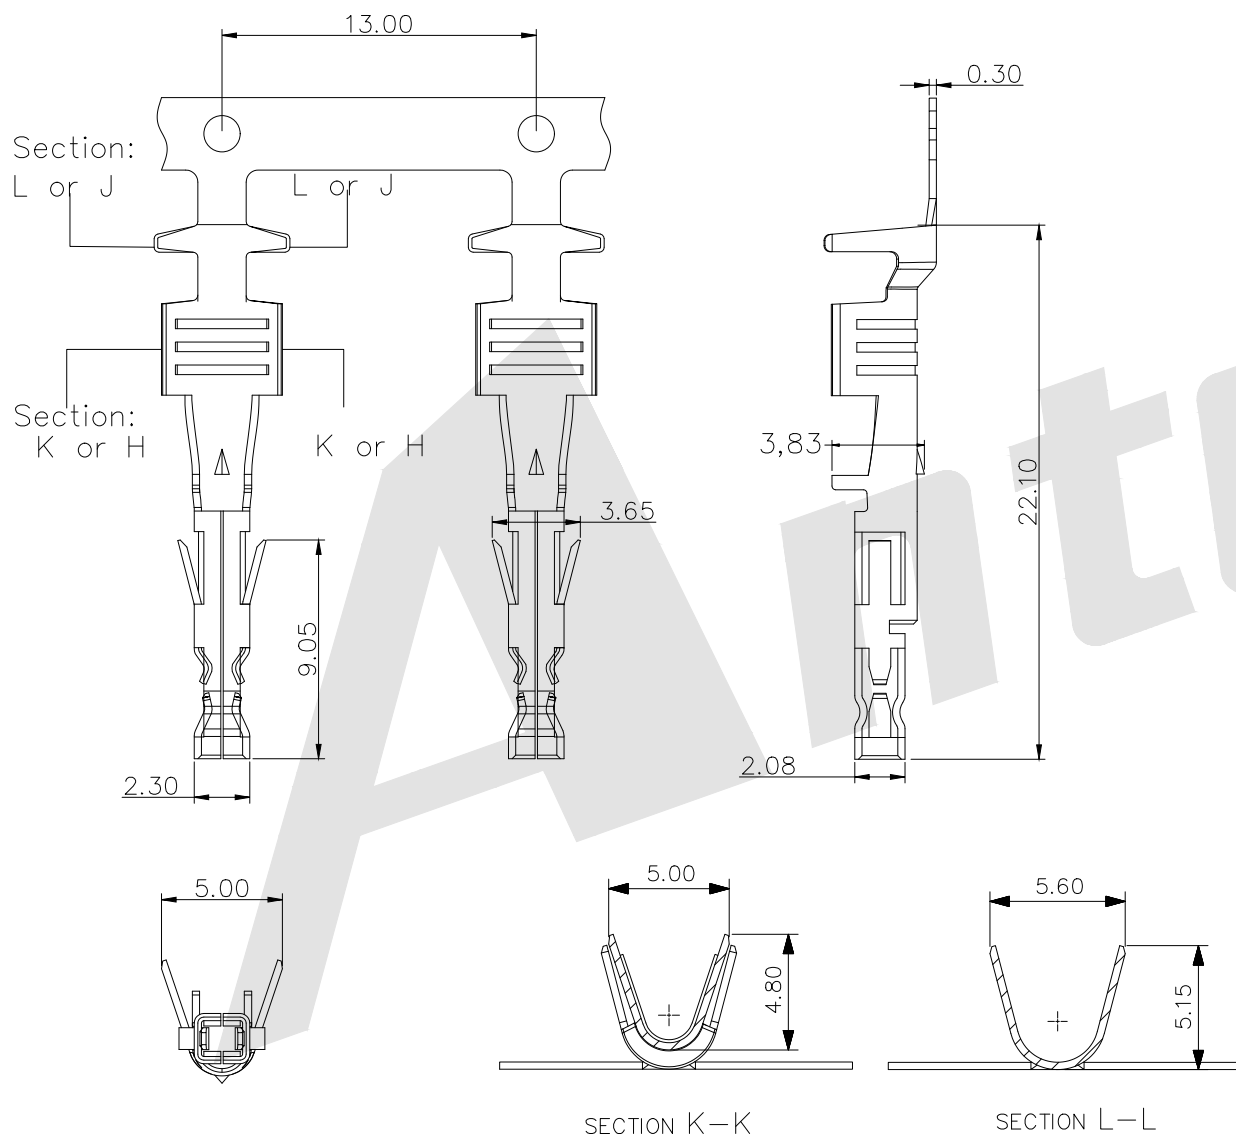

SPECIFICATION:

- 1.Current Rating: 23A AC/DC
- 2.Voltage Rating: 600V AC/DC
- 3.Contact Resistance: 15mΩ Max
- 4.Insulation Resistance: 1000MΩ min
- 5.Withstanding Voltage: 2200V AC/Minute
- 6.Temperature Range: -40℃ ~ +105℃
- 7.Metarial:High contactivity copper alloy and Tin-plated

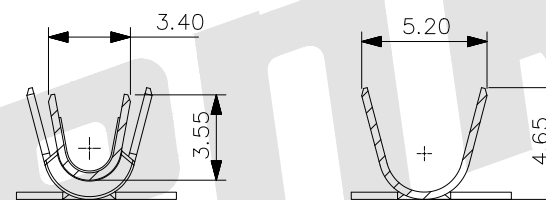

SECTION H-H

SECTION J-J

CONDUCTOR AND INSULATION 14/16AWG

Ordering Information

Part No.	Wire range	Type Code
AT5701F-AS-1	#12	1
AT5701F-AS-2	#14~#16	2

SECTION K-K

SECTION L-L

CONDUCTOR AND INSULATION 12AWG

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW ZLA DATE 09/01/2022
CHECK BobYang DATE 09/01/2022



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
5.70mm pitch Crimp Terminal Connector series

DRAWING NO: AT5701F-AS-X

PRODUCT NO: AT5701F-AS-X

REV

DESCRIPTION

DATE