

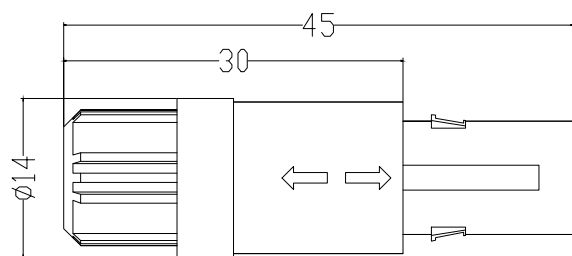


HSF



Without Protective cover Type

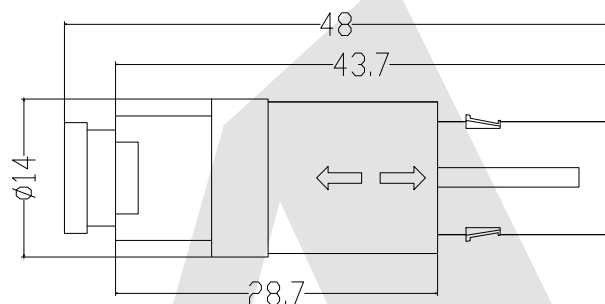

With Protective cover Type

Specifications:
 Material:
 Housing: PPS
 Environment: Outdoor
 Shock: 100g,6ms
 Withstand Voltage: 500V AC,60S
 Humidity: 60°C,95% Max
 Protection Index: IP50
 Rated Temperature: -55°C~+250°C
 Durability: 5000 Cycles
 Vibration: 10-2000Hz,15g
 Salt Spray Test >144H
 Shielding: >75dB at 10Mhz, >40dB at 1Ghz

M14SL - XP - M - PAG
 ① ② ③ ④

- ① Serial No.
M14SL: M14 Self-Lock Series
- ② Pin No.
2~14P
- ③ Gender Type
M: Male
- ④ Series No.
PAG

Pin Number	02	03	04	05	06	07	08	09	10	14
Pin Size(MM)	1.3	1.3	0.9	0.9	0.7	0.7	0.7	0.5	0.5	0.5
Conductor Size	20AWG	20AWG	22AWG	22AWG	22AWG	22AWG	22AWG	28AWG	28AWG	28AWG
(KV rms)/Work	PIN - PIN	1.20	1.15	1.20	1.05	1.05	1.05	0.85	0.85	0.60
	PIN - SHELL	1.30	1.25	1.20	0.85	0.85	0.85	0.60	0.60	0.45
Rate Current(A)	10.0	11.0	8.0	7.0	6.0	5.0	5.0	3.0	3.0	2.0

Unless Otherwise specified tolerance
 X.±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 10/09/2022
 CHECK BobYang DATE 10/09/2022

TITLE:
M14 Self-Lock Male Connector Solder Type

VER. 3rd ANGLE PROJECTION

DRAWING NO: M14SL-XP-M-PAG
 PRODUCT NO: M14SL-XP-M-PAG

REV	DESCRIPTION	DATE