

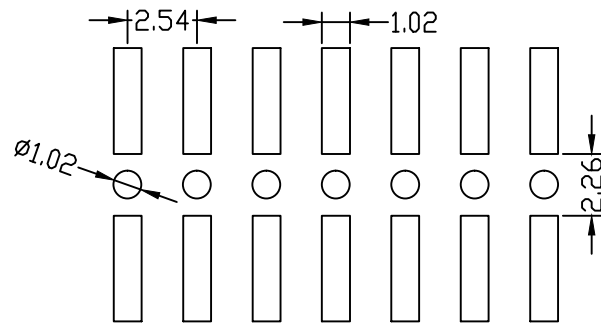
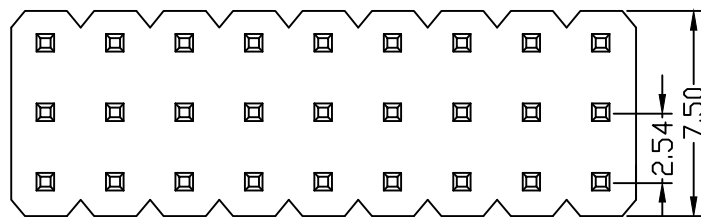


HSF

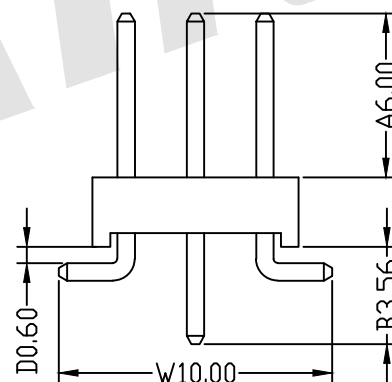

PCB LAYOUT

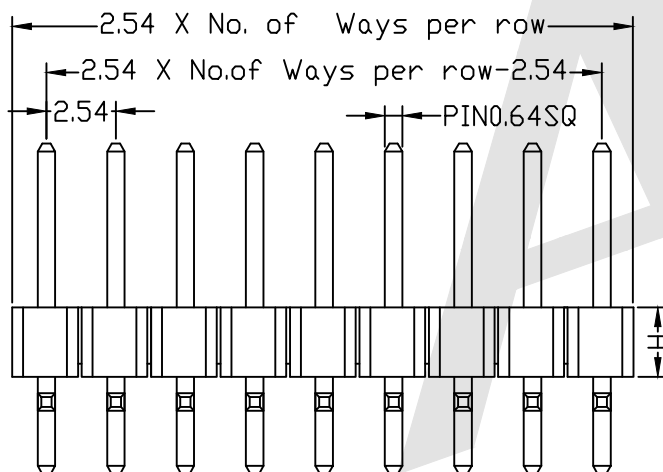

SPECIFICATION

Current Rating:	3Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65 °C to +125 °C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

PHEM11 - X - X - T - A-D-B-W - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
03 To 120
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
T: Three
⑤ Pin Length:
A: 0600=6.00mm
D: 0060=0.60mm
B: 0356=3.56mm
W: 1000=10.00mm
Please mark the desired length in the A/D/B/W
- ⑥ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.70mm
H2: 2.54mm
H3: 2.00mm
H4: 1.50mm

Standard IE P/N :

PHEM11-10-G0-T-0600-0060-0356-1000-B-B-H2

A	D	B	W
6.0	0.6	3.56	10

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Optional

SCALE: As Shown	UNIT: mm
DRAW Mo Guo Xuan	DATE 11/12/2018
CHECK BobYang	DATE 11/12/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.54mm Pin Header Three Row SMT Type

DRAWING NO: PHEM11-XT-0600-0060-0356-1000-XXX

PRODUCT NO: PHEM11-XT-0600-0060-0356-1000-XXX

REV

DESCRIPTION

DATE