
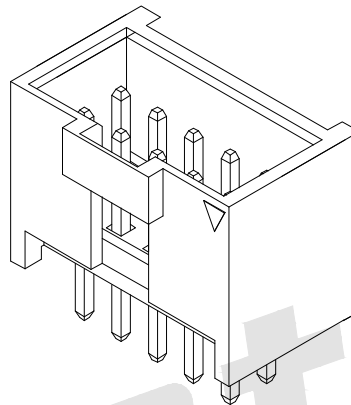


HSF



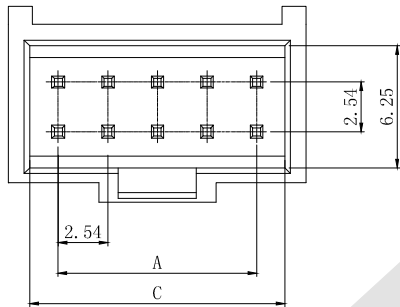


Specifications

Voltage Rating: 250V AC/DC
 Current Rating: 3A AC/DC
 Withstanding Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ Min
 Temperature Range: -25°C~+85°C
 Contact Resistance: 20mΩ Max
 Pin Material: Brass/Gold-flash or Tin-plated
 Material: PBT, UL94V-0
 Q'ty/Bag: 1000PCS

Ordering Information & Dimensions

Poles	Dimensions (mm)		
	A	B	C
6	5.08	10.12	8.12
8	7.62	12.66	10.66
10	10.16	15.20	13.20
12	12.70	17.74	15.74
14	15.24	20.28	18.28
16	17.78	22.82	20.82
18	20.32	25.36	23.36
20	22.86	27.90	25.90
22	25.40	30.44	28.44
24	27.94	33.98	30.98
26	30.48	35.52	33.52
28	33.02	38.06	36.06
30	35.56	40.60	38.60
32	38.10	43.14	41.15
34	40.64	45.68	43.68
36	43.18	48.22	46.22
38	45.72	50.76	48.76
40	48.26	53.30	51.30

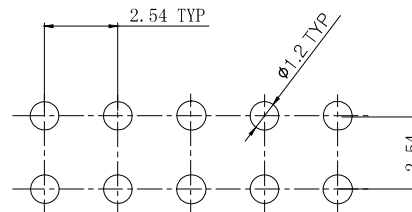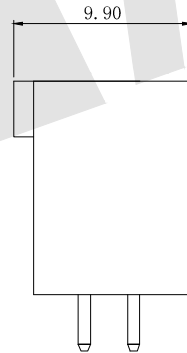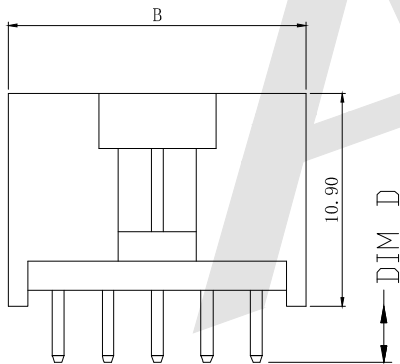

D	DIM D
1	2.50mm
2	2.90mm

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 11/20/2018
CHECK Bob Yang	DATE 11/20/2018

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
 2.54mm pitch 180° Wafer Connector series

DRAWING NO: AW2555V-XP
 PRODUCT NO: AW2555V-XP

⚠ Update Size
 DESCRIPTION

09/07/2021
 DATE

3rd ANGLE PROJECTION

A
B
C
D

A
B
C
D

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8

REV