

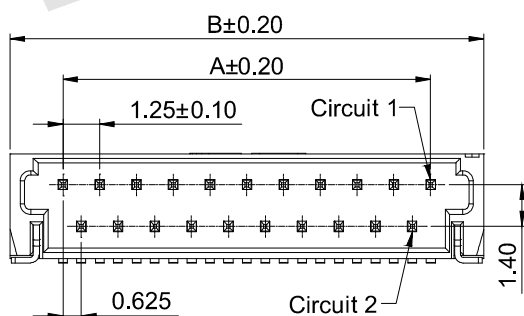
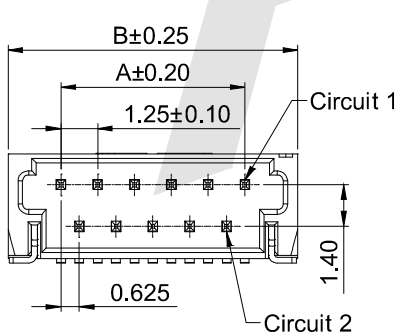
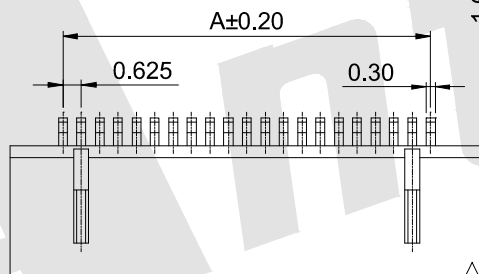

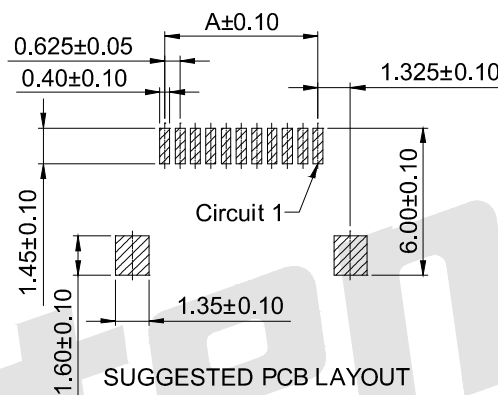


HSF

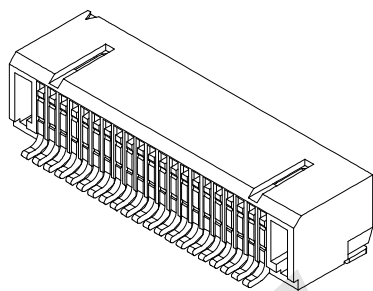

5,7,9,11 Contacts

13,15,17,19,21,31,41 Contacts

SPECIFICATIONS

- Voltage rating: 150V AC/DC
- Current rating: 1A AC,DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40°C~+105°C

WAFER

- Part NO: AW1256RDA-S-xP
- Material: Pin: Brass/Gold over Nickel
Solder Tabs: Brass/Tin over Nickel
Insulator: Nylon 6T, UL94V-0
- Mates with: AH1256 series Dual Row Housing
- Color: White


Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)	
		A	B
05	AW1256R-S-05P	2.50	6.10
07	AW1256R-S-07P	3.75	7.35
09	AW1256R-S-09P	5.00	8.60
11	AW1256R-S-11P	6.25	9.85
13	AW1256R-S-13P	7.50	11.10
15	AW1256R-S-15P	8.75	12.35
17	AW1256R-S-17P	10.00	13.60
19	AW1256R-S-19P	11.25	14.85
21	AW1256R-S-21P	12.50	16.10
31	AW1256R-S-31P	18.75	22.35
41	AW1256R-S-41P	25.00	28.60

Unit:mm

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Jack Bao DATE: 11/04/2017
 CHECK: Bob Yang DATE: 11/04/2017



Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 1.25mm pitch 90° Dual Row Wafer-SMT Connector Series

DRAWING NO: AW1256RDA-S-xP

PRODUCT NO: AW1256RDA-S-xP

REV	DESCRIPTION	DATE