


HSF

RoHS

REMARKS :

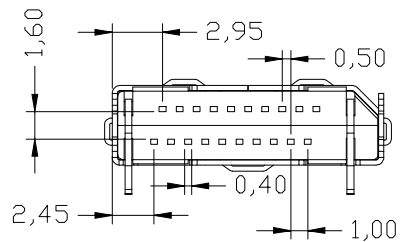




1. Material: contacts: C2680 EH T=0.30
insulator: LCP shell: SPCC T=0.30
2. CONTACT INSERTION AND WITHDRAW FORCE
 - 1.1. Insertion force: 44.1N max.
 - 1.2. Withdrawal force: 9.8N min/39.2N max.
3. ELECTRIC PROPERTY
 - 2.1. Contact current rating: 0.5A min.
 - 2.2. Voltage rating: 40V AC (RMS).
 - 2.3. Withstanding voltage: 500V AC for 1 minute.
 - 2.4. Insulation resistance: 100 megaohms max
 - 2.5. Contact resistance: 30 milliohms max.
4. AMBIENT TEMPERATURE
 - 3.1. Operating temperature: -25 to +85°C.

A

A

B

B

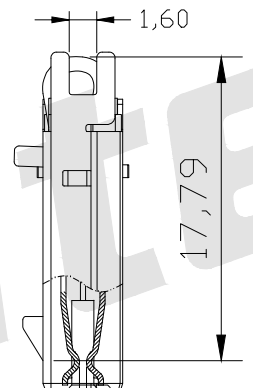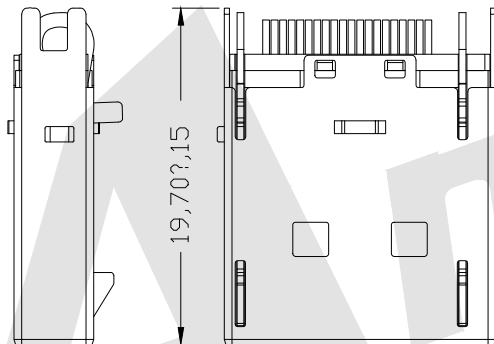


Ordering Code:

DP - M - X - X - 01
① ② ③ ④ ⑤

- ① Series No:
- ② Male / female:
M: Male
- ③ Contact Plating:
1: Selective 1u"
2: Selective 3u"
3: Selective 5u"
4: Selective 15u"
5: Selective 30u"
6: All Gold
- ④ Shell Plating:
1: NICKKL PLATK
2: TIN-LKAD PLATED
3: GOLD PLATKD
- ⑤ series number:
01

C

C

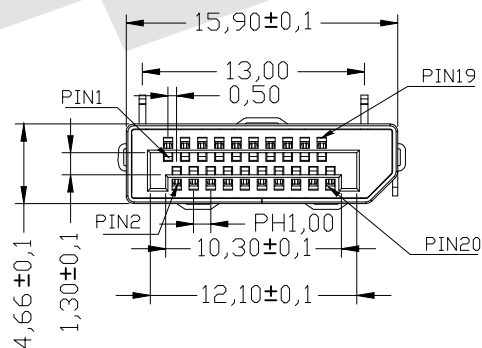

D

D

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm
DRAW Mo Guo Xuan DATE 29/10/2018
CHECK BobYang DATE 29/10/2018

TITLE:
Display Male straddle type(with hook)



DRAWING NO: DP-MXX01
PRODUCT NO: DP-MXX01

REV	DESCRIPTION	DATE

1 2 3 4 5 6 7 8