

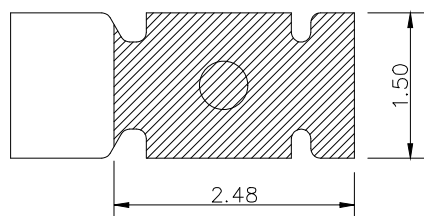
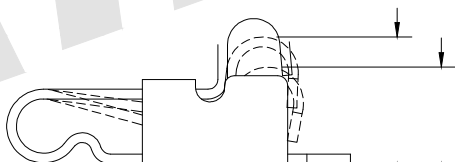
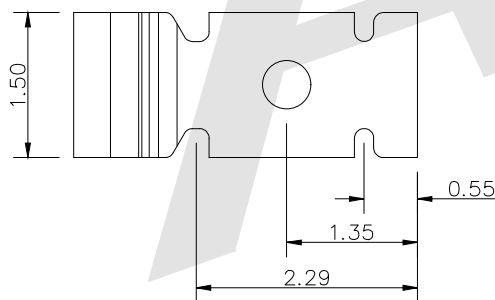

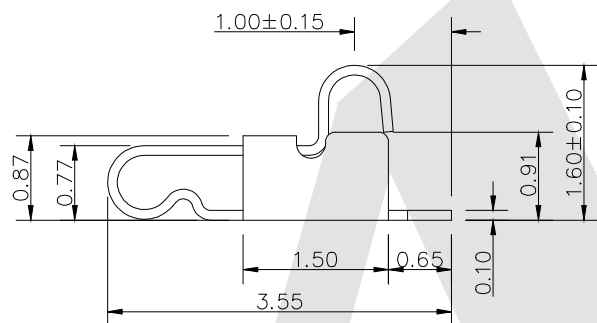


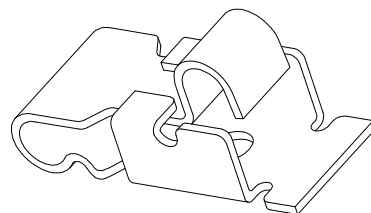

Notes:

- 1: Material:
Spring: stainless steel
- 2: Plating:
Spring:50~80u' Ni
Contact area:3u' Au over 50~80u' Ni
- 3: Electrical:
Rated Current&Voltage:DC 1A, 12V
Contact Resistance: 50 mΩ Max. at working height.
- 4: Mechanical:
Force: 60~80g at working height.
Durability: 1000 cycles (min)
- 5: Work Temperature:
Withstanding Highest Temperature: 280°C
Operational Temperature:-20°C~ + 70°C

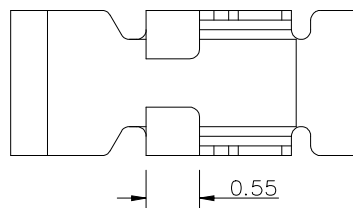

normal work height 1.30
ultimate height 1.00

SF - 035 - X - X - 04
① ② ③ ④ ⑤

- ① Series No. :
SF:Spring Finger
- ② Length:
035:3.5mm
- ③ Packing Method:
A:Tray R:Tape & Reel B:Bag
- ④ Plating
A:1u" Au Plated over 50~80u Ni
B:3u" Au Plated over 50~80u Ni
C:Sn Plated over Ni
- ⑤ Serial Number:
04

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
DRAW ZLA DATE 01/04/2022
CHECK BobYang DATE 01/04/2022

TITLE:
Spring Finger L=3.5MM



DRAWING NO: SF-035-X-X-04
PRODUCT NO: SF-035-X-X-04

REV DESCRIPTION

DATE

1 2 3 4 5 6 7 8