

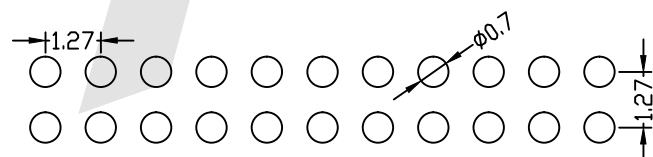



HSF

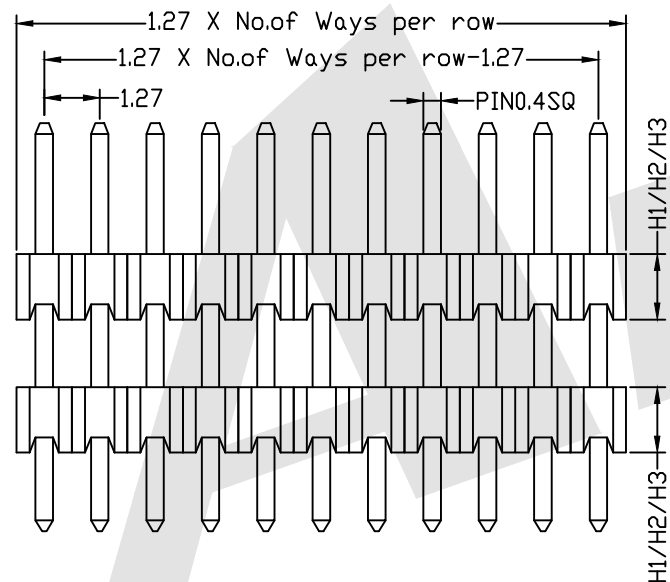

RoHS

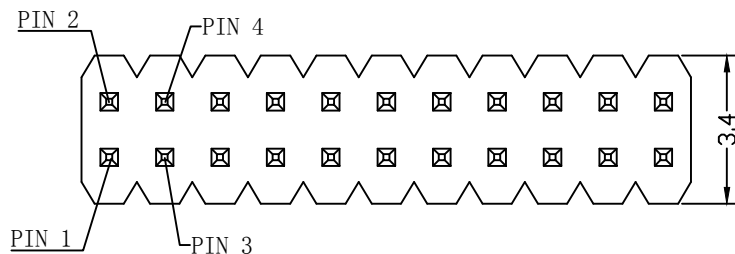

P. C. B LAYOUT

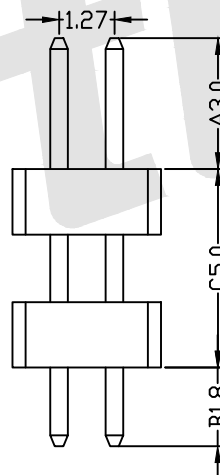

## SPECIFICATIONS:

Current Rating: 1Amp  
Insulation Resistance: 1000M ohms min  
Contact Resistance: 20M ohms max  
Dielectric Withstanding: AC500V  
Operating Temperature: -65° C to +125° C  
Contact Material: Brass  
Insulator Material: PA6T, UL94V-0, Black

## Ordering Code:

PHCS09 - X - X - D - A-C-B - X - X - X  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts  
02 To 100

③ Contact Plating:

G0:Gold flash S0:Selective  
G1:3U" Gold S1:Selective 3u"  
G2:5u" Gold S2:Selective 5u"  
G3:10u" Gold S3:Selective 10u"  
G4:15u" Gold S4:Selective 15u"  
G5:30u" Gold S5:Selective 30u"  
SN:Tin

④ Connector Type  
D: Dual

⑤ Pin Length:

A:0300=3.0mm

C:0500=5.0mm

B:0180=1.8mm

Please mark the desired length  
in the A/C/B

⑥ Insulator Material

B:PA6T

C:LCP

E:PA9T

⑦ Packing:

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&amp;Reel

W:Tape&amp;Reel+CAP

⑧ Plastic High

H1:0.85mm

H2:1.0mm

H3:1.5mm


Standard IE P/N :

PHCS09-10-G0-D-0300-0500-0180-B-B-H2

| A        | C   | B   |
|----------|-----|-----|
| 3.0      | 5.0 | 1.8 |
| Optional |     |     |

Unless Otherwise specified tolerance  
X. ±0.35 X.XX: ±0.20  
X.X: ±0.25 X.XXX: ±0.15

SCALE:  
As Shown UNIT: mm  
DRAW YG ZHONG DATE 12/07/2015  
CHECK BobYang DATE 12/07/2015



ANTENK ELECTRONICS CO.,LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

TITLE:

1.27mm Pin Header Straight  
Type Dual Row

DRAWING NO:

PHCS09-XXD-0300-0500-0180-XXX

PRODUCT NO:

PHCS09-XXD-0300-0500-0180-XXX

REV

Increase packing method and material

2016/10/25

DESCRIPTION

DATE