

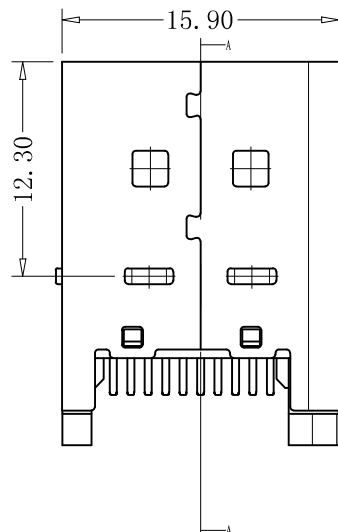
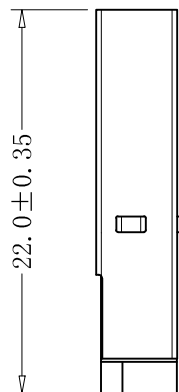


HSF

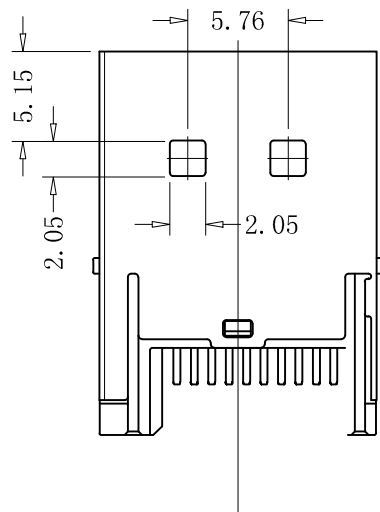

ROHS

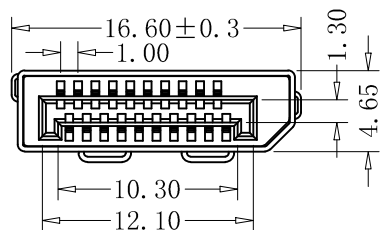

REMARKS (备注):

Shell material: C2680/SPCC T=0.3mm
 Contact: phosphorus copper 电镀半金锡GF
 Housing: LCP BLACK UL94-V0
 Insulation resistance (绝缘阻抗): 100 megaohms (兆欧) max.
 Contact resistance (接触阻抗): 30 milliohms (毫欧) max.
 Contact current rating (额定电流): 0.5A min.
 Voltage rating (额定电压): 40V AC (RMS).
 Withstanding voltage (阻抗电压):
 500V AC for 1 minute.

ordering Code:

DP - M - X - X - 05
 ① ② ③ ④ ⑤

- ① Series No:
- ② Male/female:
F: female
- ③ Contact Plating:
1: Selective 1u"
2: Selective 3u"
3: Selective 5u"
4: Selective 15u"
5: Selective 30u"
6: All Gold
- ④ Shell Plating:
1: Nickel Plated
2: Tin-Nickel Plated
3: Gold Plated
- ⑤ Series Numer:
05

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown UNIT: mm
 DRAW: ZLA DATE: 26/03/2022
 CHECK: BobYang DATE: 26/03/2022

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE:
 Display Port 20P Plug Without Hook

DRAWING NO: DP-MXX05

PRODUCT NO: DP-MXX05



3rd ANGLE PROJECTION

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

DATE

1 2 3 4 5 6 7 8