


HSF

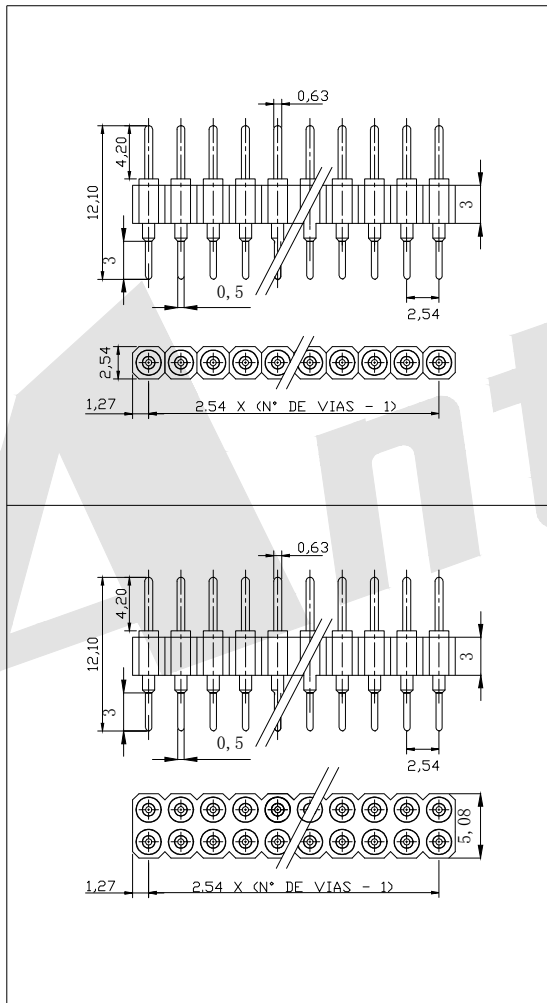

Technical Date

Material:

Pin(outer sleeve)Brass,machined CuZn38Pb2

Plating(outer sleeve)

Tin Plated:2m/80 μ " N, 5 μ m/200 μ " Sn

Gold Pated: 2 μ m/80 μ " N, 0.8 μ " gold

Insulator: PPS UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Current resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical LigeCycle: min 500

Operating Temperature: -40° C to+105°

Soldering Temperature: +255°

Ordering Code:

MPHES - X - X - X - X - X - 11
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① MPHES series
- ② Contact NO:
XX=XXpin
For example:
06=06pin
- ③ Pin Plated
0: No
1: Tin 150 μ"
2: Tin 200 μ"
3: G/F
4: Gold 3 μ"
5: Gold 10 μ"
6: Gold 15 μ"
S: Special
- ⑤ Packing
A:Tray B:Bag
C:Tube D:Tape Reel
- ⑥ TYPE :
A:TYPE1 Single Row 1*1-1*50
B:TYPE2 Double Row:2*1-2*40
- ⑦ Series Number
11

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15
SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 07/02/2021
CHECK BobYang	DATE 07/02/2021

Antenk® ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE:
Machined Pin Connectors 2.54
mm: MPHES Series L12.1mm



DRAWING NO: MPHES-XXXXX11

PRODUCT NO: MPHES-XXXXX11

REV	DESCRIPTION	DATE