



HSF



ROHS



3D View








Notes:

- Waterproof rate: IP67
IP67: Immersed in 1M water for 30 Minutes
- Electrical characteristics
Temperature range: -40° C to +85° C
rating: 60V AC/DC 1.5A
Dielectric withstanding voltage: 250V AC for one minute

Order Code:

M8 - XP - F - 146-1
① ② ③ ④

- ① Type of M series: M8
- ② NO. of PINS: 06~08
- ③ Gender option: Female
- ④ Series number: 146-1

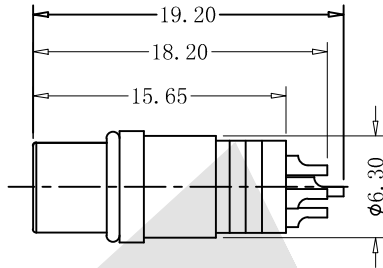

3D View

M8-08P-F-146-1	
M8-06P-F-146-1	
P/N	PIN ASSIGNMENTS FRONT VIEW


4	Waterproof ring	Silicone	Red	1
3	Shell	Copper alloy	Nickel plating 60u	1
2	Female Pin	Copper alloy	Gold plating 3u	6~8
1	Plastic core	Nylon UL94 V-0	Black	1
NO.	ITEM	MATERIALS	SURFACE	QUANTITY

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 19/04/2022

CHECK BobYang DATE 19/04/2022



Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:
M8 6~8P Female Wire Side

DRAWING NO: M8-XP-F-146-1

PRODUCT NO: M8-XP-F-146-1

REV	DESCRIPTION	DATE
1	2	3

1

2

3

4

5

6

7

8