


HSF




ROHS

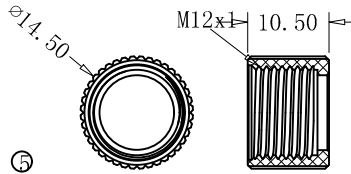

Nut specifications

Notes:

- 1. Electrical characteristics
 - Temperature range: -40° C to +100° C
 - rating: 60V AC/DC 5A
 - Dielectric withstanding voltage: 500V AC for one minute

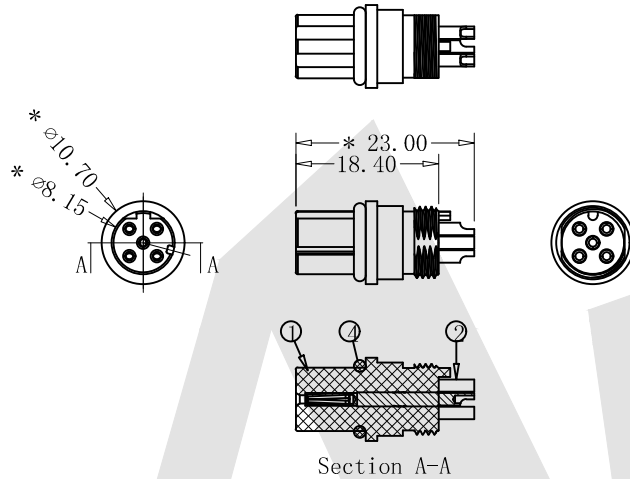

Section A-A

Order Code:

M12 - D - XP - F - 114-0
 ① ② ③ ④ ⑤

- ① Type of M series: M12
- ② Code option: D Code
- ③ NO. of PINS: 03~05
- ④ Gender option: Female
- ⑤ Series number: 114-0

M12-D-03P -F-114-0	
M12-D-04P -F-114-0	
M12-D-05P -F-114-0	
P/N	PIN ASSIGNMENTS FRONT VIEW

5	Nut	Copper alloy	Nickel plating 60u	1
4	Waterproof ring	Silicone	Red	2
3	Shell	Copper alloy	Nickel plating 60u	1
2	Female Pin	Copper alloy	Gold plating 3u	12
1	Plastic core	Nylon UL94 V-0	Black	1
NO.	ITEM	MATERIALS	SURFACE	QUANTITY

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 07/04/2022
 CHECK BobYang DATE 07/04/2022

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail: sales@antenk.com

TITLE: M12 3~5P Female D Code Wire Side

DRAWING NO: M12-D-XP-F-114-0

PRODUCT NO: M12-D-XP-F-114-0



REV	DESCRIPTION	DATE
1		