

HSF





SPECIFICATION

Current Rating: 3Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PBT,UL 94V-0 Black



Ordering Code:

PHER09 - X - X - T - A-D-B - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No.of Contacts
03 To 120
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
T:Three
⑤ Pin Length:
A:0600=6.00mm
D:0120=1.20mm
B:0300=3.00mm
Please mark the desired
length in the A/D/B
⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High
H1:1.70mm
H2:2.54mm
H3:2.00mm
H4:1.50mm

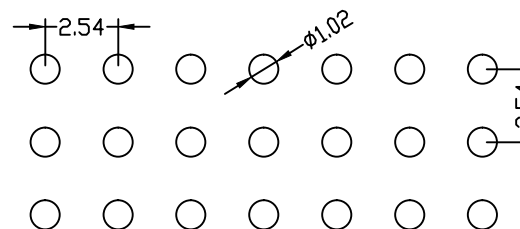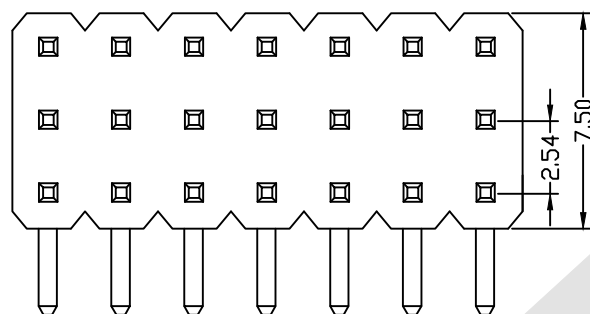

PCB LAYOUT

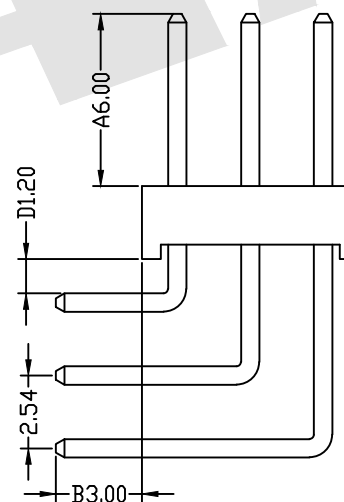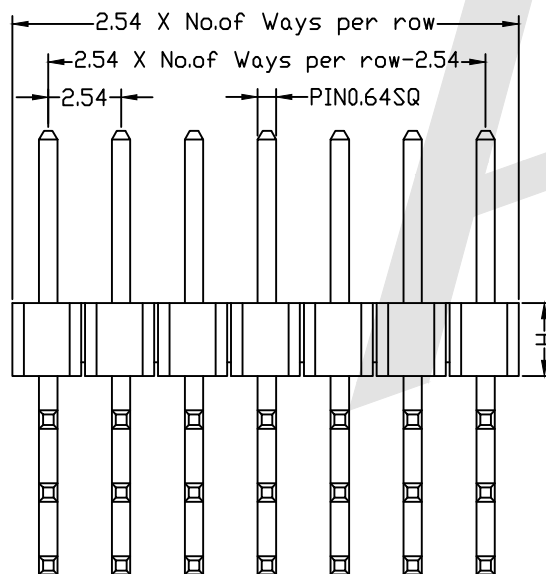

Standard IE P/N :

PHER09-10-G0-T-0600-0120-0300-A-B-H2

A	D	B	Unless Otherwise specified tolerance	
6.0	1.20	3.0	X. ±0.35 X.X: ±0.25	X.XX: ±0.20 X.XXX: ±0.15

Optional		SCALE: As Shown	UNIT: mm
DRAW	Mo Guo Xuan	DATE	11/12/2018
CHECK	BobYang	DATE	11/12/2018



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.54mm Pin Header Three Row AngleType

DRAWING NO: PHER09-XXT-0600-0120-0300-XXX

PRODUCT NO: PHER09-XXT-0600-0120-0300-XXX

REV

DESCRIPTION

DATE