


HSF



RoHS

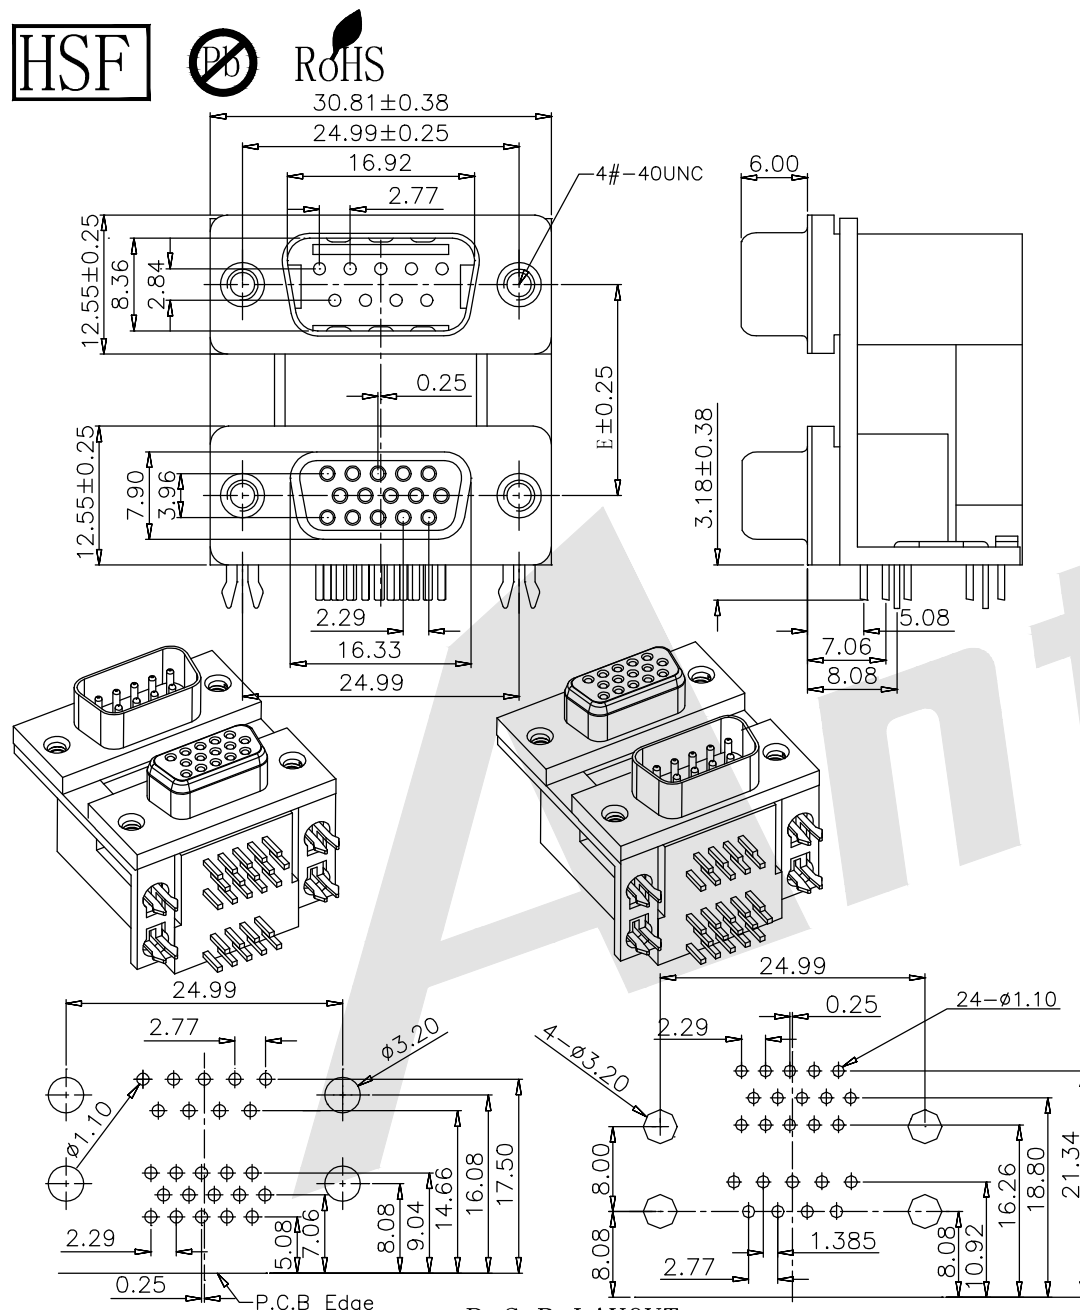

P. C. B LAYOUT

Material:

Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0

Contact: Brass or Bronze

Shell: Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 30 milliohms Max

Withstanding Voltage: 1000V AC For 1 Minute


Insulation Resistance: 5000 Megohms Min

Operating Temperature: -55° C to +105° C

Ordering Code:


DDR02 - X - X - X - B - S

- ① ② ③ ④ ⑤ ⑥
- ① Dual Port Angle DIP ⑤ Color Code:
 ② Contact NO.: B:Black L:Blue
 A:9P Male TO 15P Female W:White G:Grey
 B:9P Female TO 15P Male
 C:15P Female TO 9P Male
 D:15P Female TO 9P Female
 ③ Row Spacing:
 A: Dim. E=15.88mm
 B: Dim. E=19.05mm
 C: Dim. E=22.86mm
 ④ Other Option:
 C:Riveted ground hooks
 with #4-40UNC Open
 S1:Riveted Ground Hooks
 Pre-Loaded #4-40UNC
 Hex Screws 5.8mm
 S2:Riveted Ground Hooks
 Pre-Loaded #4-40UNC
 Hex Screws 4.8mm
 ⑥ Contact Plating
 S: Selective Gold
 S1:Selective 3u" Gold
 S2:Selective 5u" Gold
 S3:Selective 10u" Gold
 S4:Selective 15u" Gold
 S5:Selective30u" Gold
 G0: Gold flash
 G1: 3u" Gold over
 G2: 5u" Gold over
 G3: 10u" Gold over
 G4: 15u" Gold over
 G5: 30u" Gold over

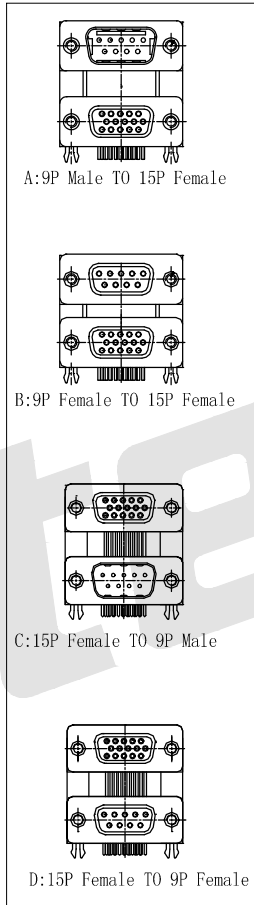

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Wu Feng Rong DATE 08/08/2019
 CHECK BobYang DATE 08/08/2019



ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: D-SUB P.C.B Dual Port Right Angle
 9P TO 15P(stamped Pin)

DRAWING NO: DDR02-XXXXX

PRODUCT NO: DDR02-XXXXX

Revise code number C1,C2 option

2019.08.06

REV DESCRIPTION

DATE