

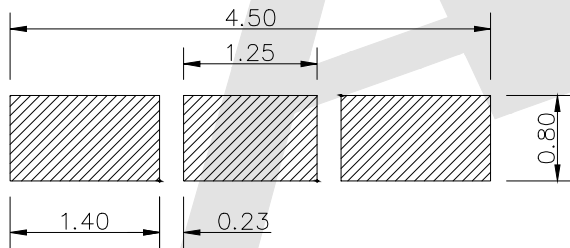




HSF

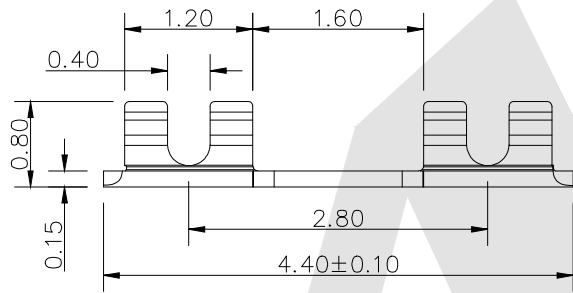

ROHS

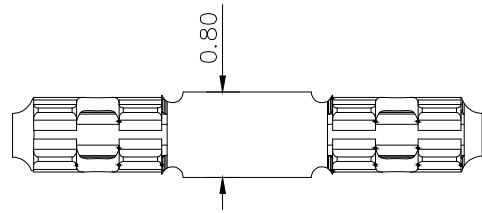

RECOMMENDED PCB LAYOUT



Notes:

- 1: Material:
Spring: stainless steel
- 2: Plating:
Spring: 50~80u' Ni
Contact area: Sn over 50~80u' Ni
- 3: Electrical:
Rated Current&Voltage: DC 1A, 12V
Contact Resistance: 50 mΩ Max. at working height.
- 4: Mechanical:
Force: 60~80g at working height.
Durability: 1000 cycles (min)
- 5: Work Temperature:
Withstanding Highest Temperature: 280°C
Operational Temperature: -20°C ~ + 70°C

SF - 044 - X - X - 14
① ② ③ ④ ⑤

- ① Series No. :
SF: Spring Finger
- ② Length:
044: 4.4mm
- ③ Packing Method:
A: Tray R: Tape & Reel B: Bag
- ④ Plating
A: 1u" Au Plated over 50~80u Ni
B: 3u" Au Plated over 50~80u Ni
C: Sn Plated over Ni
- ⑤ Serial Number:
14

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm


DRAW ZLA DATE 01/04/2022

CHECK BobYang DATE 01/04/2022

TITLE:
Spring Finger L=4.4MM

DRAWING NO: SF-044-X-X-14

PRODUCT NO: SF-044-X-X-14



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		