

HSF


RoHS

notes :
 materia
 body:LCP,UL94V-0 rated;color:white insertion
 (molding):LCP,UL 94V-0 rated:
 shell:brass.
 plating:nickle plating
 contact:phonsphor bronze
 plating:tin plating on contact area:
 electrical specificating
 operation coltage 30 VAC max.
 current rating :0.5 Amoere per contact.
 contact resistance:30 milliohms max.
 insulation resistance:100 megohms min.
 dielectaic withstanding voltage:500 V AC min.
 mechanical
 insertion force:4.5kg/f max.
 withdrawal force:1.0~4.0kg/f
 duradility:10000 cycles.
 environmental
 operating temperature:-40 °C to +80 °C
 how to order

Ordering Code:

MDP - M - X - X - 02
 ① ② ③ ④ ⑤

- ① Series No:
- ② Male/female:
M:Male
- ③ Contact Plating:
1: Selective 1u"
2: Selective 3u"
3: Selective 5u"
4: Selective 15u"
5: Selective 30u"
6: All Gold
- ④ Shell Plating:
1:NICKKL PLATK
2:TIN-LKAD PLATED
3:GOLD PLATKD
- ⑤ series num ber:
02

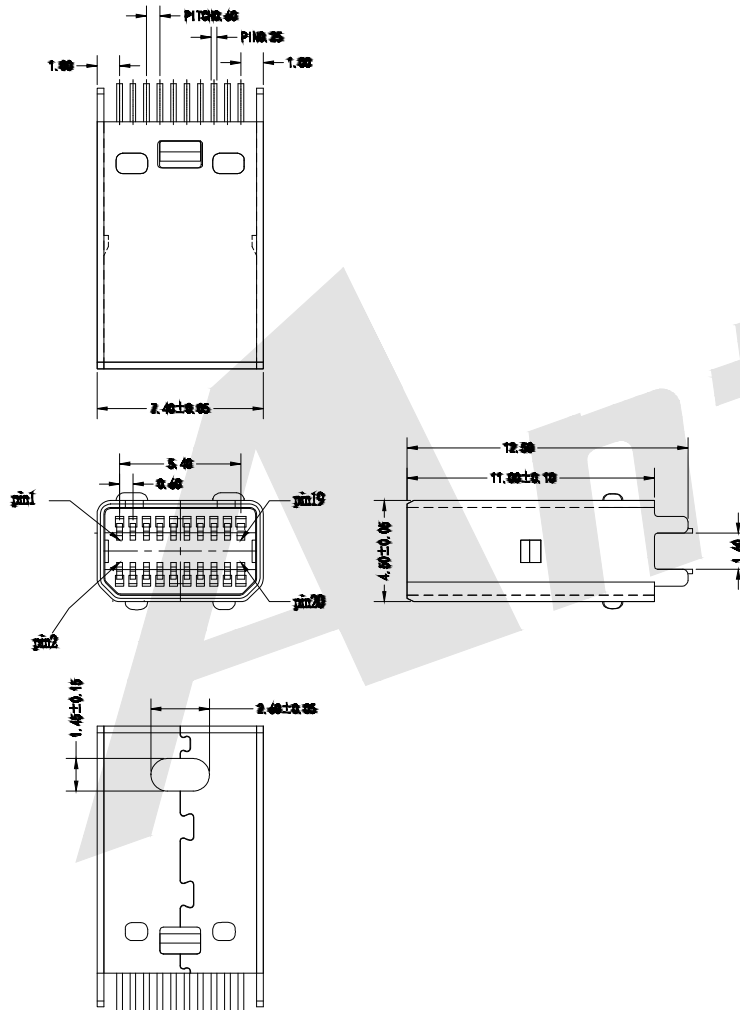

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Mo Guo Xuan DATE 29/10/2018
 CHECK BobYang DATE 29/10/2018

TITLE: Mini display port plug
 (Straight straddle type)



DRAWING NO: MDP-MXX02
 PRODUCT NO: MDP-MXX02

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		