



Specifications

Voltage Rating:300V AC/DC

Current Rating:2A AC/DC

Withstanding Voltage:1000V AC/Minute

Insulation Resistance:1000MΩ Min




Temperature Range: -25°C~+85°C

Contact Resistance: 20mΩ Max

Material: Nylon 66 +30%GF UL94V-0

Mate With: AT2018T Terminal

Applicable Wire:AWG\$22-28

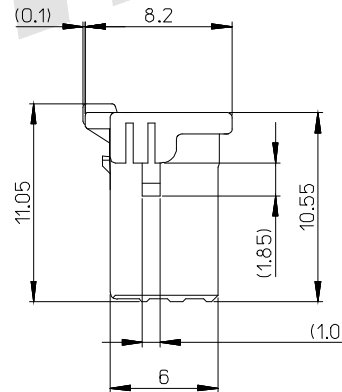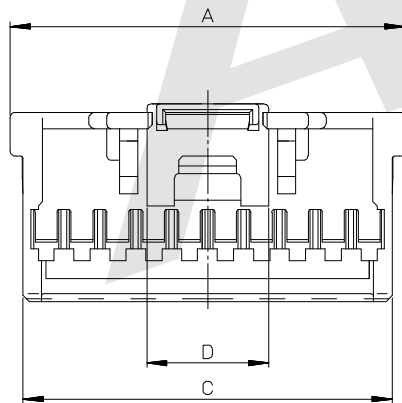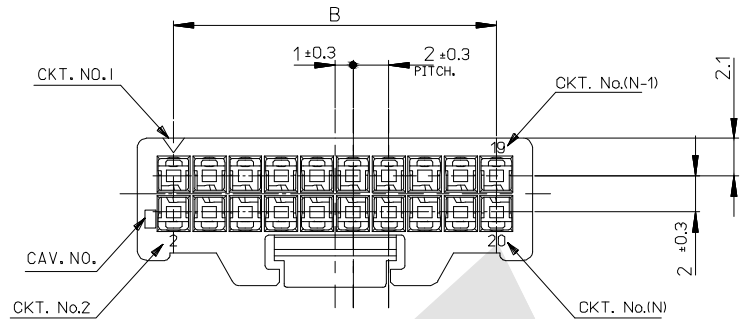

Poles	Dimensions (mm)			
	A	B	C	D
2*5P	12	8	10.6	5.1
2*6P	14	10	12.6	6.8
2*7P	16	12	14.6	6.8
2*8P	18	14	16.6	6.8
2*9P	20	16	18.6	6.8
2*10P	22	18	20.6	6.8
2*11P	24	20	22.6	6.8
2*12P	26	22	24.6	6.8
2*13P	28	24	26.6	6.8
2*14P	30	26	28.6	6.8
2*15P	32	28	30.6	6.8
2*16P	34	30	32.6	6.8
2*17P	36	32	34.6	6.8
2*18P	38	34	36.6	6.8
2*19P	40	36	38.6	6.8
2*20P	42	38	40.6	6.8

Unless Otherwise specified tolerance
 X. ± 0.35 X. XX: ± 0.20
 X. X: ± 0.25 X. XXX: ± 0.15




ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 11/20/2018
 CHECK Bob Yang DATE 11/20/2018

TITLE:2.00mm pitch Housing Connector series

△ Revise poles QTY and drawing NO.

08/03/2022



DRAWING NO:AH2018-2xNP

PRODUCT NO:AH2018-2xNP

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8