

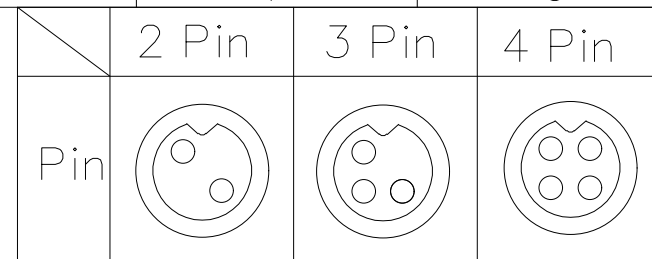


HSF

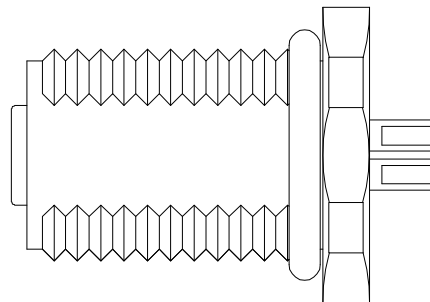



RoHS




Ordering Code:

M5 - XP - F - 004
 ① ② ③ ④

- ① Type of M series: M5
- ② NO. of PINS: 02~04
- ③ Gender option:
F: Female
- ④ Series number: 004

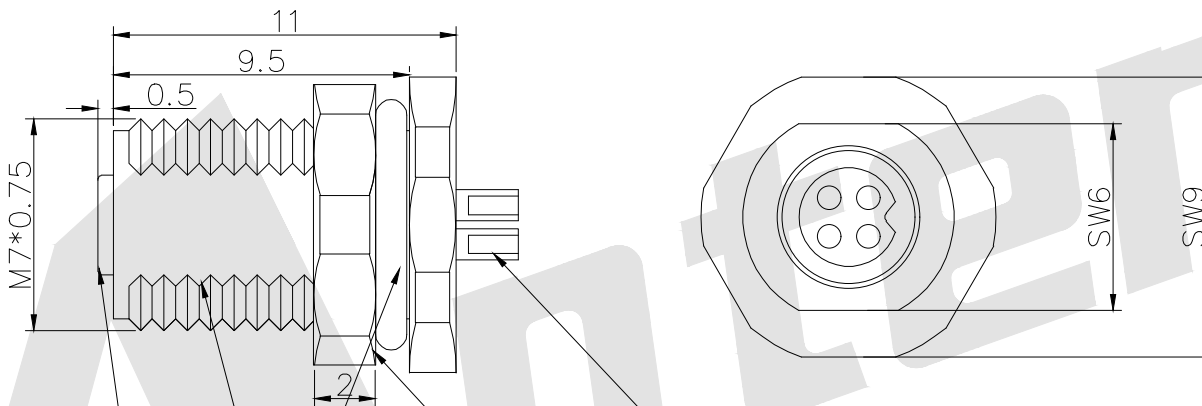

Recommended Panel Cut-out



Engagement force	≤30N	Rated volage	60v DC
Isengagement force	≥5N	Rated current	1A
echanical lifespan	≥500	Insulation resistance	≥1000 MΩ
IP rating	IP67/IP68	Contace resistance	≤10mΩ
Flammability	UL94 v-0	Operation Temperature	-40 TO+105℃

E	Over Mold	1	NICKL PLATED BRASS
D	O RING	1	SILIGONE RED
C	NUT	1	NICKL PLATED BRASS
B	Female PIN	/	PHOSPHOR BRONZE GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF BLACK
Item	PART NAME	QTY	MATERIAL /FINISH

Unless Otherwise specified tolerance
 X.±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 24/05/2022
 CHECK BobYang DATE 24/05/2022



Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: M5 2-4P Waterproof Female Wire Side, Lock Front Panel SW9T

DRAWING NO: M5-XP-F-004

PRODUCT NO: M5-XP-F-004

REV	DESCRIPTION			DATE
-----	-------------	--	--	------