

二位四通电磁阀 (滑阀型) Four Way Two Position (Spool-type)



DHF08-241

(替代原型号DHF06-241)

工作过程描述:


Description of the process

当电磁铁不通电时, ③和②通, ①和④通;

当电磁铁通电时, ③到④通, 同时②到①通.

When de-energized, the valve allows flow from ③ to ②, and ① to ④;

When energized, the valve allows flow between ③ to ④, as well as ② to ①.

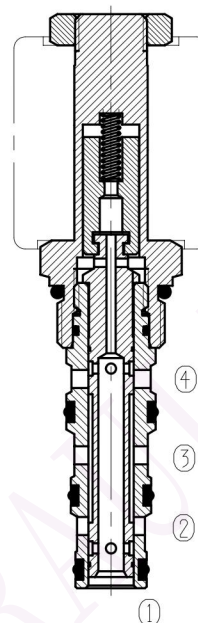

技术参数:

Specifications:

最高工作压力: 210bar

Max. Working Pressure

可通过最大流量: 见压力-流量曲线

Flow Max. See Performance

内泄漏量: <80ml/min at 210bar

Internal Leakage

工作电压: 12VDC、24VDC、110VAC、220VAC

Operating Volt

最小工作电压: 正常电压85%

Min Voltage Requires 85% of normal voltage

过滤精度: 20μm or better

Filtration Of Oil

标准插孔: T4-3

Type of Standard Cavity See Page 7.1.1

使用温度: -30~+100℃ (丁腈橡胶)


Temperature Standard Buna Seals

标准阀块型号: T4-31*/33*/34*/36*

Standard Block Model See Page 1.5.3

机能符号:

Symbol:




压力-流量曲线: 32 cST Oil/40℃

Characteristic:

③ — ④ — — —

② — ① — — —

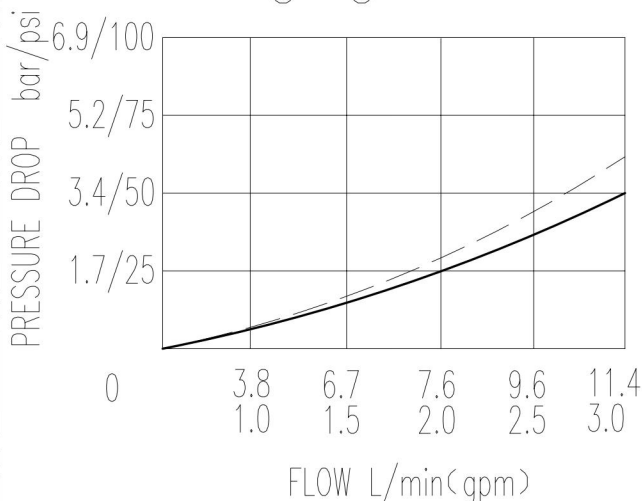


二位四通电磁阀 (滑阀型)

Four Way Two Position (Spool-type)



DHF08-241

外形尺寸: Profile dimensions

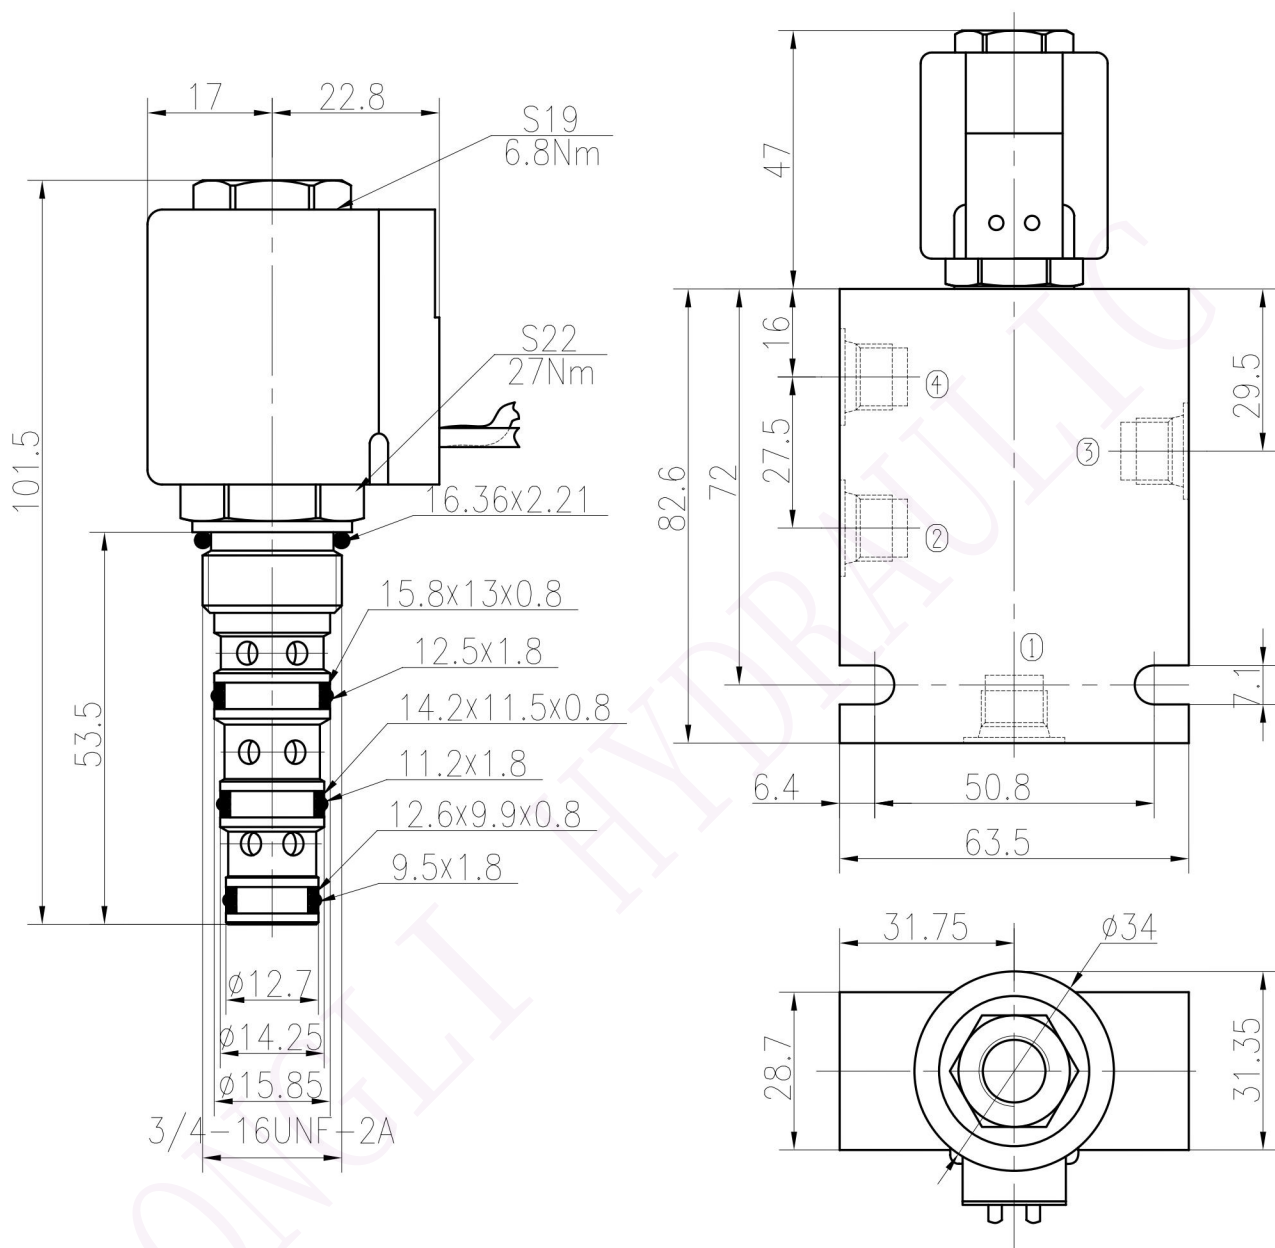

TO ORDER

DHF08-241

电磁阀 Solenoid Valve
阀芯机能 Function

阀块油口 Body Porting

省略为不带阀块 Omit for Cartridge only

G1/4 4G
G3/8 8G
SAE4 4T
SAE6 6T

密封材质 Seals

丁腈橡胶

Buna(Std.) N

氟橡胶

Fluorocarbon V

电压 Voltage

12 12VDC

24 24VDC

110 110VAC

220 220VAC

接线形式

Connection

DL Double Leads (双线)

DH Electrical Outlet (插头)

DR Deutsch DT04-2P