


DLF10-00/X.Y.Z

(替代原型号DLF08-00)



技术参数 Specifications:



最高工作压力(Max.Working Pressure):	240bar
最大流量(Flow Max):	45L/min at 7bar(Full Open)
内泄漏量(Internal Leakage):	≤0.3ml/min(关闭时)
过滤精度(Filtration Of Oil):	25μm or better
使用温度(Temperature):	-30~+100℃(丁腈橡胶) (Standard Buna Seals)
插孔(Cavity):	T5-1(See Page 7.1.1)
安装扭矩(Installation torque):	33.9~36.7Nm
标准阀块型号:	T5-11*/13*/14*/16*
Standard Block Model	See Page 1.5.1

顺时针旋转调节螺杆可使阀由全开到完全关闭,即流量由最大到完全截止。截止时内泄漏小于0.3ml/min(210bar)。

The valve reduce its office value from fully opened to fully close with clock-wise adjustment rotation. At the same time ,the flow from max. to shut-off.

此阀反向(①到②)允许液流自由流动,无节流功能。

Reverse flow from ①to② is free and no restriction.

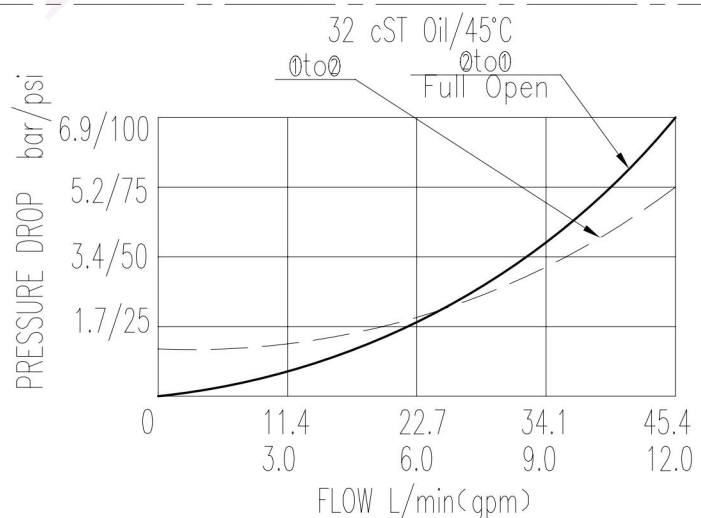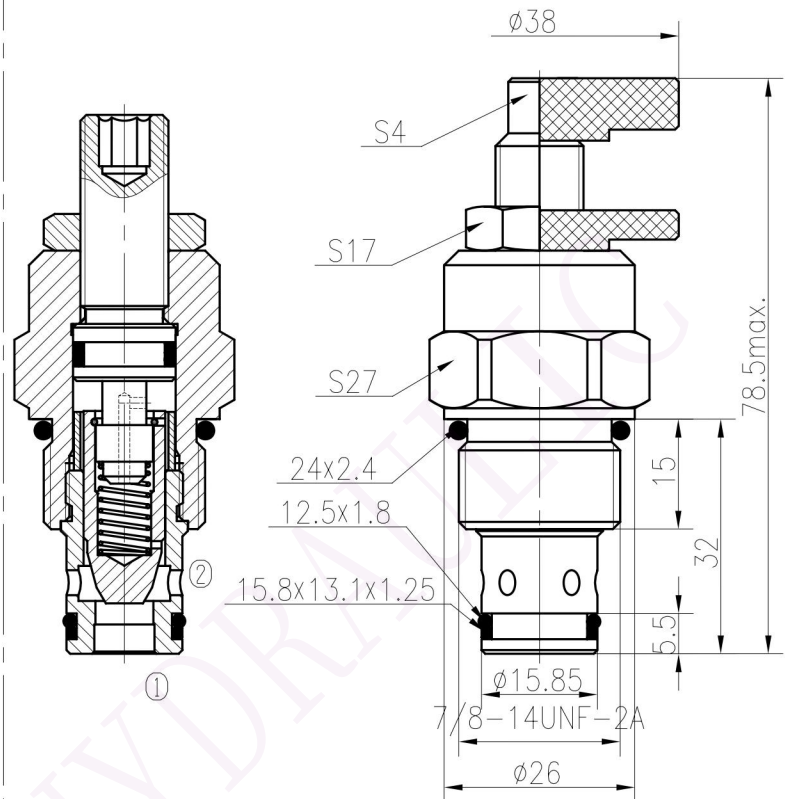


X	阀块油口(PORTING)	Y	密封材质(SEALS)	Z	调节方式(ADJUSTMENTS)
0	Cartridge Only	N	丁腈橡胶(Buna)	05	内六角、防泄漏螺母 Leakproof hex. and socket screw
4G	G1/4	V	氟橡胶(Fluor.)		
8G	G3/8				
4T	SAE4			10	铝制手轮及锁紧螺母 Alum. Knob and Locking Nut
6T	SAE6				

单向节流阀
Adjustable Restriction Valves With Reverse Flow Check




DLF12-00/X.Y.Z



技术参数 Specifications:

最高工作压力(Max.Working Pressure):	240bar
最大流量(Flow Max):	200L/min at 7bar
内泄漏量(Internal Leakage):	≤0.3ml/min(关闭时)
过滤精度(Filtration Of Oil):	25μm or better
使用温度(Temperature):	-30~+100℃(丁腈橡胶) (Standard Buna Seals)
插孔(Cavity):	T7-S1(See Page 7.1.5)
安装扭矩(Installation torque):	62.6~73.4Nm

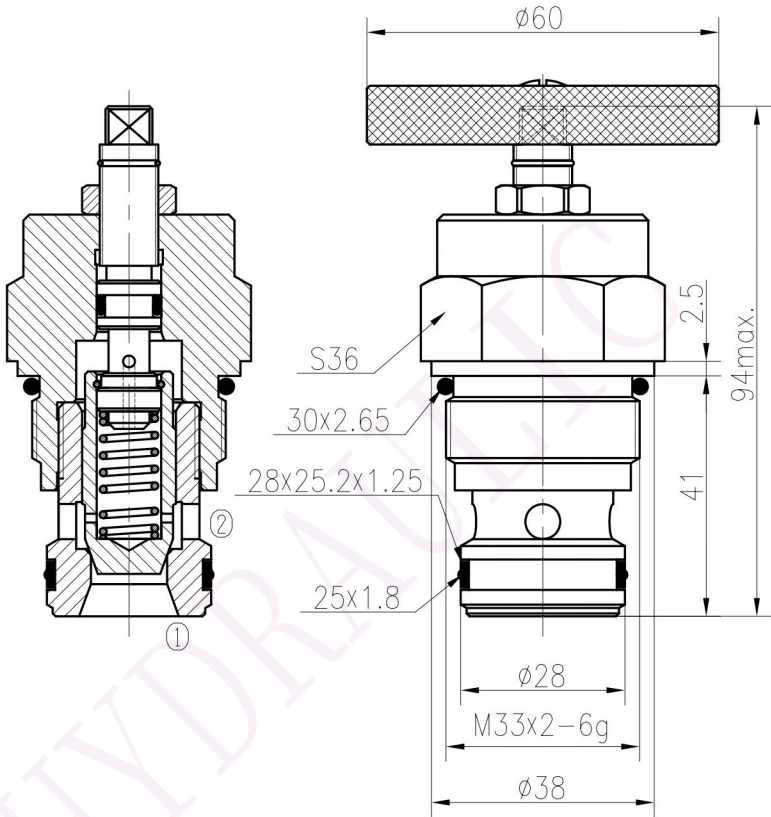


顺时针旋转调节螺杆可使阀由全开到完全关闭，即流量由最大到完全截止。截止时内泄漏小于0.3ml/min(210bar)。

The valve reduce its office value from fully opened to fully close with clock-wise adjustment rotation. At the same time ,the flow from max. to shut-off.

此阀反向(①到②)允许液流自由流动，无节流功能。

Reverse flow from ①to② is free and no restriction.

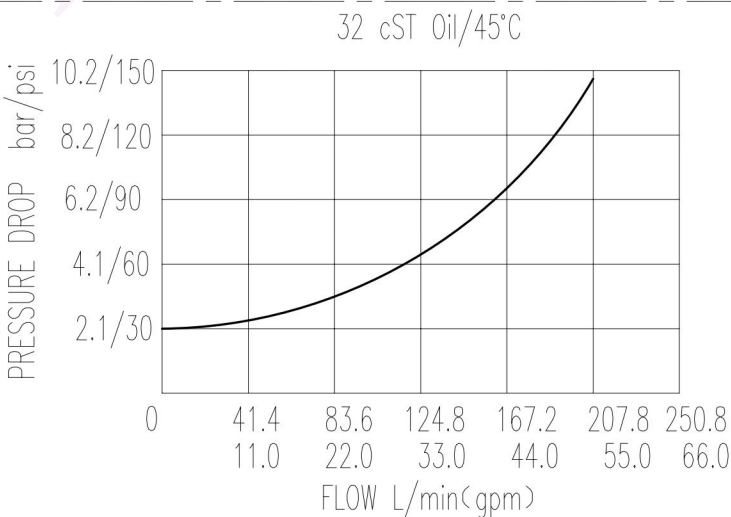

X	阀块油口(PORTING)	Y	密封材质(SEALS)	Z	调节方式(ADJUSTMENTS)	
0	Cartridge Only	N	丁腈橡胶(Buna)	05	内六角、防泄漏螺母 Leakproof hex. and socket screw	
		V	氟橡胶(Fluor.)	10	铝制手轮及锁紧螺母 Alum. Knob and Locking Nut	