



UFO LED Highbay Light

BRIGHTEN YOUR LIFE

NEW LED TECHNOLOGY THAT ALLOWS THE
COEXISTENCE OF ENVIRONMENTAL
PROTECTION AND ENERGY SAVING

Benefits

1. Replace conventional Highbay Lights
2. Precision Die Cast Aluminum Housing
3. Fade Resistant Powder Coat Finish
4. Easy Installation
5. CE ROHS listed



BB-GKD-XXX-B1(-HLPW)



BB-GKD-XXX-B2(-HLPW)


Features

1. Beam angle:120 degrees.
2. Aluminum die-casting heat sinks is good for heat dissipation.
3. It's major to replace the conventiona highbay light.
4. Green, energy saving, long and reliable life of 50,000 hours.
5. No RF interference, No IR/UV radiation ,no mercury pollution.
6. Wide colour availability in degrees Kelvin(K),2700-6700K.
7. Streamline exterior design, beautiful appearance.
8. Environment friendly ,energy saving (70~80%).
9. Special circuit design, each LED work separately, avoiding the single broken LED influence problem.



Application


1. Parking areas Lighting.
2. Ceiling Lighting.
3. Warehouse Lighting.
4. High/Low Bay Lighting.

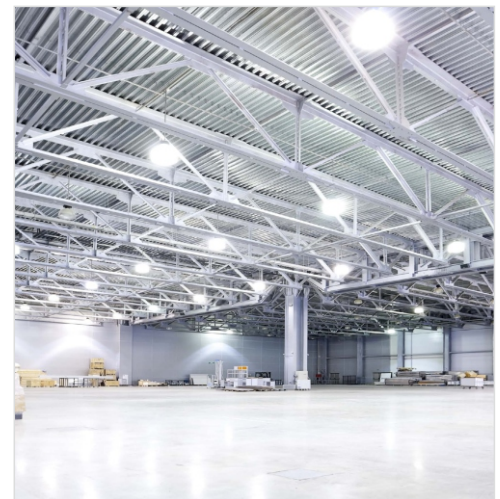


SPECIFICATIONS

Power	60W	80W	100W	120W	150W
Model	BB-GKD-60W-B1/B2 (-HLPW)	BB-GKD-80W-B1/B2 (-HLPW)	BB-GKD-100W-B1/B2 (-HLPW)	BB-GKD-120W-B1/B2 (-HLPW)	BB-GKD-150W-B1/B2 (-HLPW)
Luminous Flux	7800lm	10400lm	13000lm	15600lm	19500lm
Replacement	HPS 175W	HPS 200W	HPS 300W	HPS 400W	HPS 600W
DLC certification (only -HLPW)	Pending	Pending	Y	Pending	Y
Model differences	Different installation accessories: B1-Ring mounting; B2-Bracket mounting				
Light Source	SMD LED				
Luminous Efficacy	BB-GKD-60W-B1/B2 is 130lm/w BB-GKD-60W-B1/B2-HLPW is 150lm/w				
Operation Temp.	-40 to +45°C				
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW				
CRI	85				
Life Span	50,000 hours at 25°C				
Voltage	100-277VAC/50-60HZ				
Driver	UL listed power supply				
Dimming	Available				
Sensor	Microwave sensor Daily sensor available				
Control System	APP, remote control, touch screen, light control and other control options available				
Beam Angle	120° (Transparent, Matte) 90° (Lens)				
Cover	Transparent, Matte, Lens available				
IP	67				
PF	>0.95				
Warranty	5Years				


DIMENSIONAL DRAWING

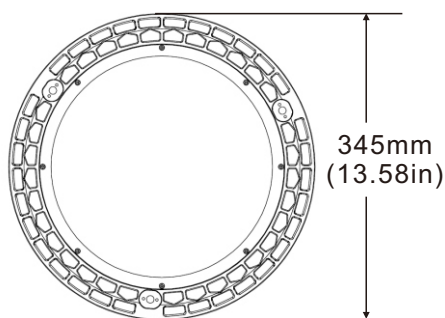

BB-GKD-XXX-B1&B2(-HLPW)


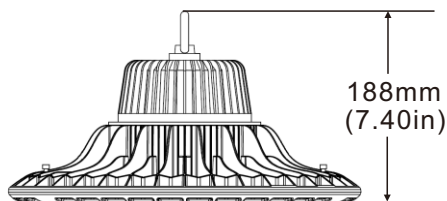


BB-GKD-XXX-B1(-HLPW)

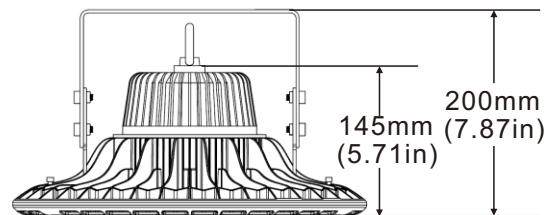

BB-GKD-XXX-B2(-HLPW)

LUMINOUS INTENSITY DISTRIBUTION

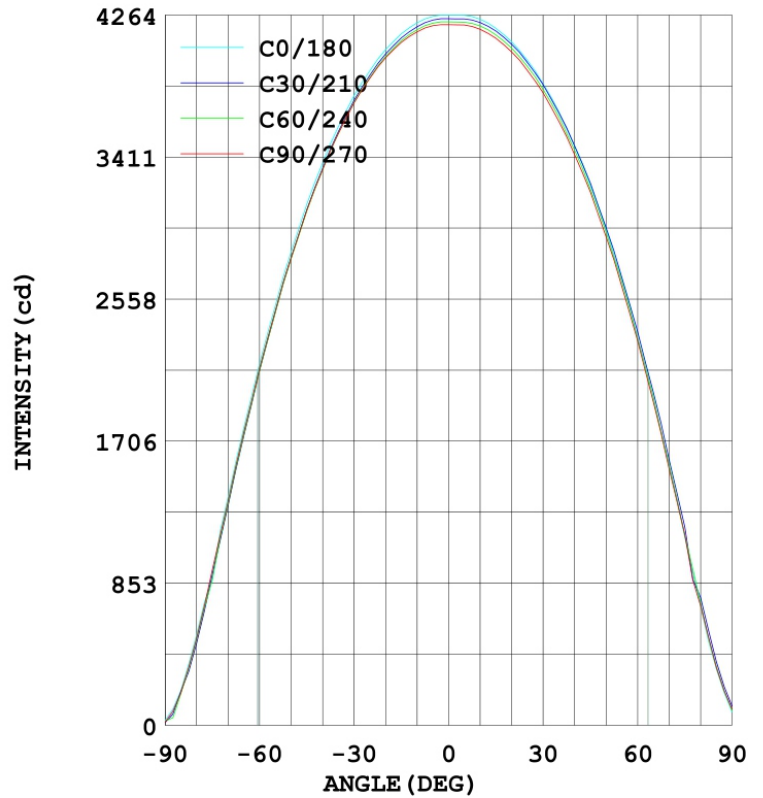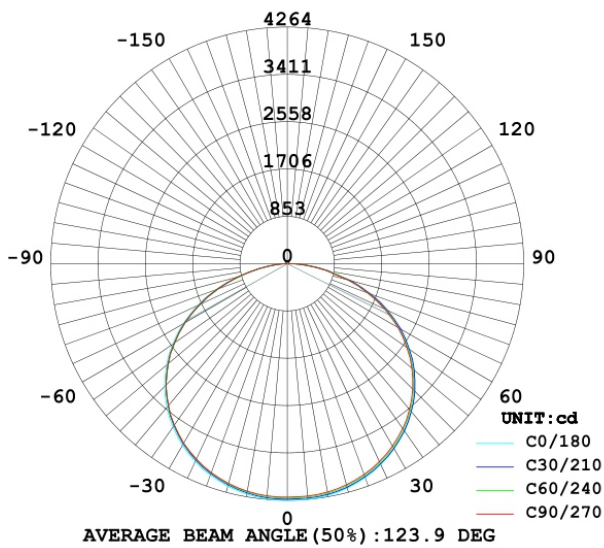

PROJECTS

By using our 120W Highbay Light to replace 400W Metal Halide bulb for warehouse high bay lighting fixtures, the customer is now able to save a lot per month from his electric bill.



Replace




120W LED = 400W MH

Note:


- Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.

Highbay Control System

- Support automatic luminance change with embedded daylight sensor.
- Support automatic CCT change with embedded temperature sensor for CCT light.
- Support more 500 devices control by one gateway, one app.
- Support frequency hopping technology for strong anti-jamming ability.
- Support mesh network, control range is more 50 meters.
- Support storage of 500 devices QRcodes in gateway.
- Support schedule settings for each device.
- Support above 10 mobile devices control on station mode.
- Support remotely control via internet on station mode.
- Support remote control/touch panel/handheld dimmer control as optional.
- Support scene/area/group control based on user preset.
- Support encryption transmission.
- Support iOS/Android/Windows app.
- Support Motion sensor

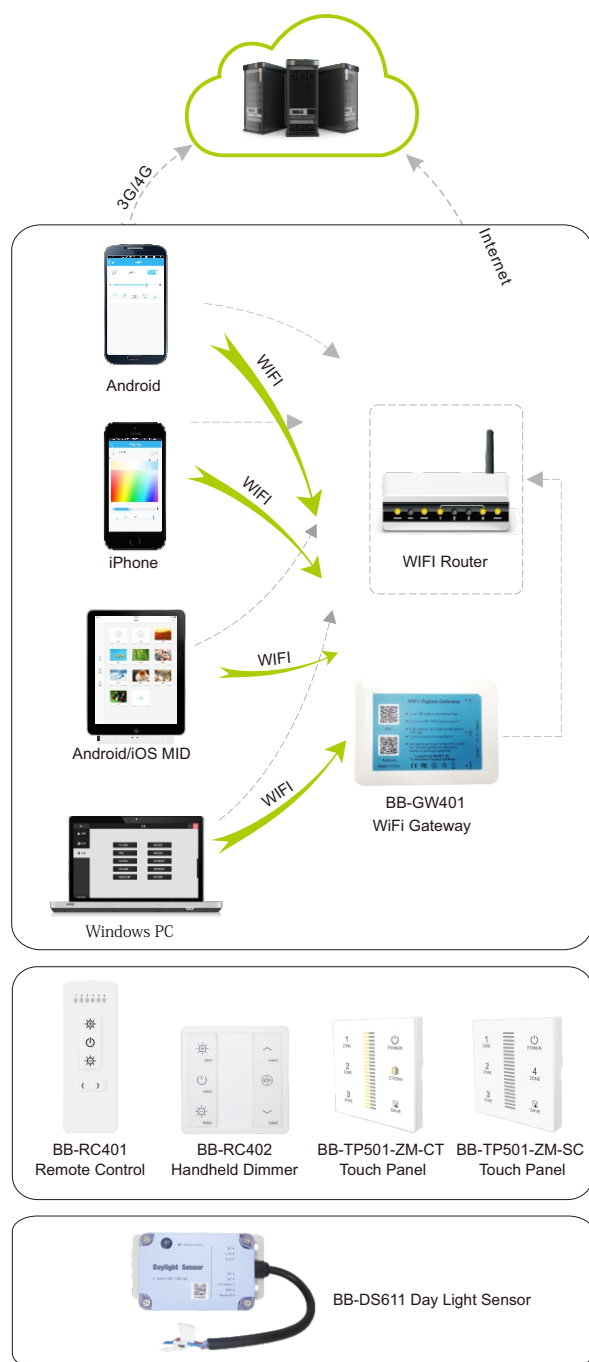

Control

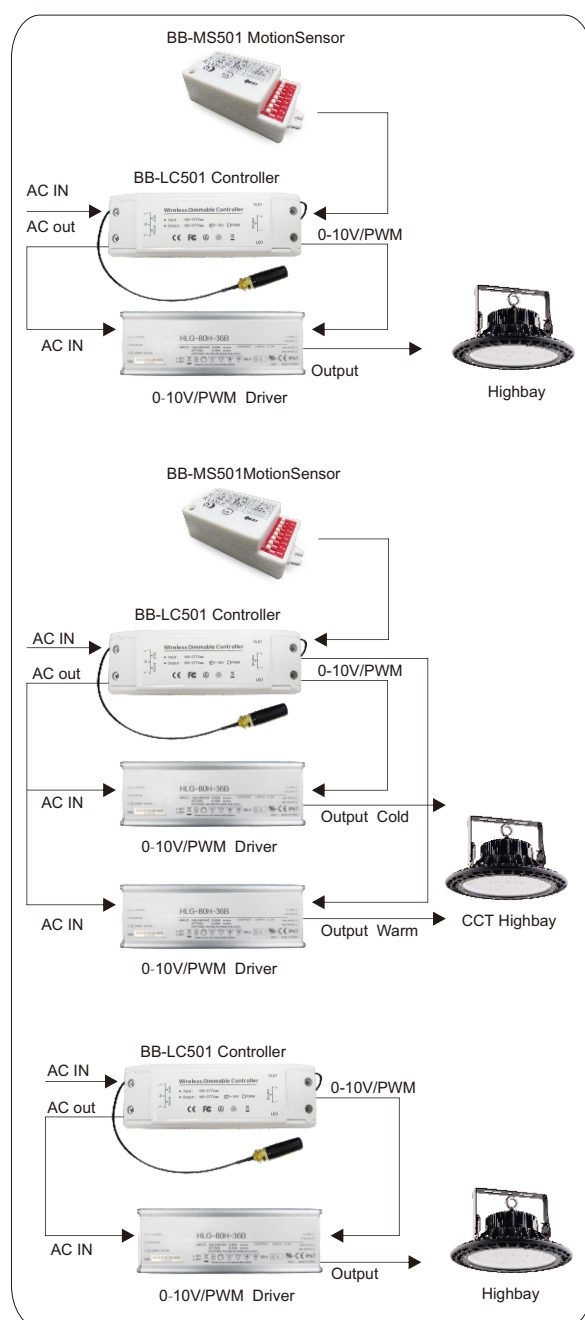

Lighting

System Diagram




Parameters

Params	BB-GW501 WiFi-Zigbee Gateway	BB-RC402 Handheld Dimmer	BB-RC401 Remote Control	BB-TP501-ZM-CT Touch Panel
Input Voltage	5Vdc	5Vdc(Charge)	5Vdc(Charge)	110Vac-240Vac
Adapter	5V1A MicroUSB	5V1A MicroUSB	5V1A MicroUSB	–
Standby Current	–	10uA	10uA	–
Frequency	2.4G	2.4G	2.4G	2.4G
Control Range	50m	50m	50m	30m
Operating Temp	-20°C - 70°C	-20°C - 50°C	-20°C - 50°C	-20°C - 55°C


Params	BB-TP501-ZM-SC Touch Panel	BB-LC401 Daylight Sensor	BB-LC501 Controller	BB-MS501_12 MotionSensor
Input Voltage	110Vac-240Vac	100-240Vac	100-240Vac	12Vdc
Adapter	–	–	0 - 10V	12Vdc
Standby Current	–	–	20mA	–
Frequency	2.4G	2.4GHz	2.4GHz	5.8GHz
Control Range	30m	50m	–	–
Operating Temp	-20°C - 55°C	-40°C - 85°C	-40°C - 85°C	-20°C - 60°C

iLightsIn Apps


The Apps can download from Apple app market and Android app market by searching iLightsIn. Windows version is also ready.

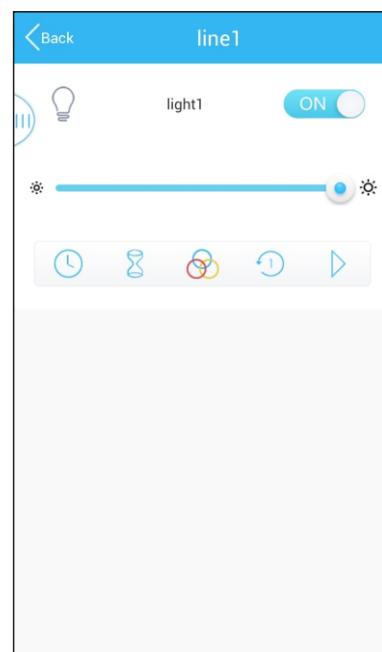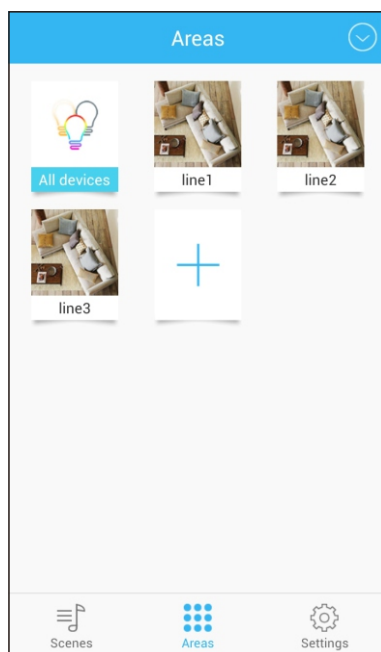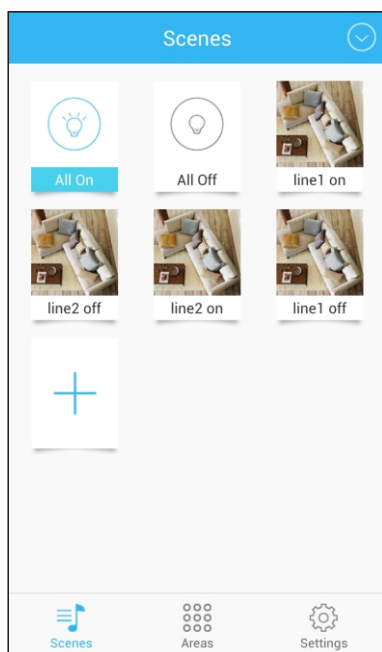


Optional Accessories

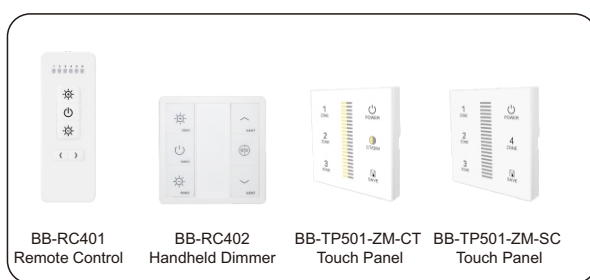

Wiring

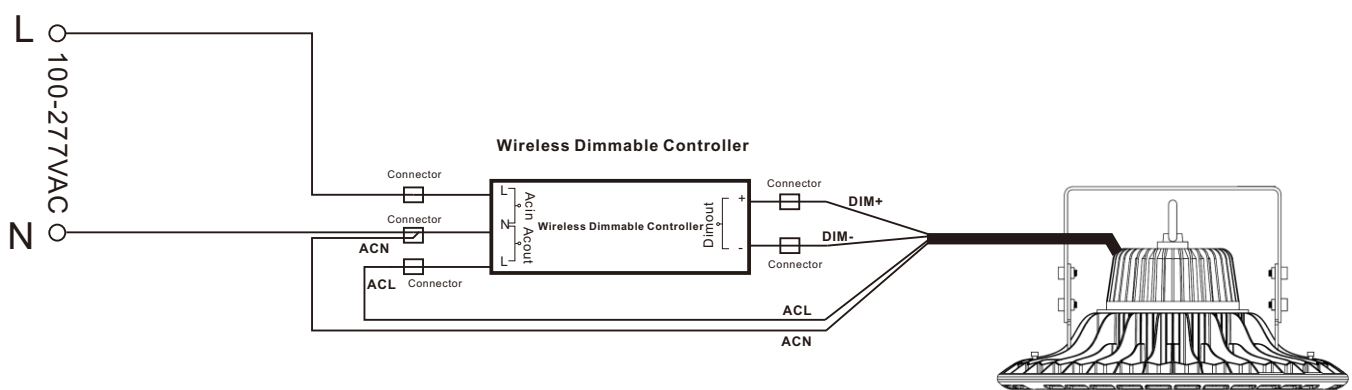

LED Highbay Light

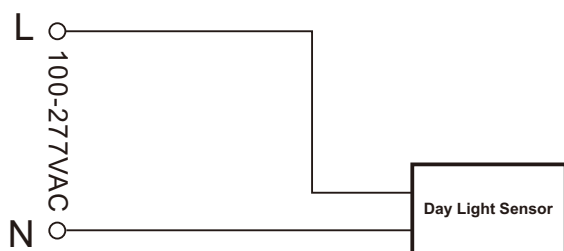


*Only Wireless Dimmable Controller and Day Light Sensor must be wired in accordance with the above wiring.


*WiFi Gateway and Touch Panel are energized through an adapter, respectively.

INSTALLATION


UFO LED Highbay Light has four kinds of installation:

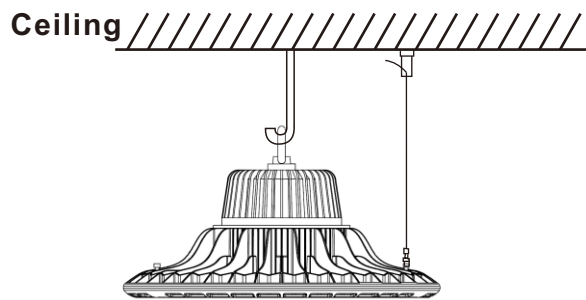


1.The suspension loop

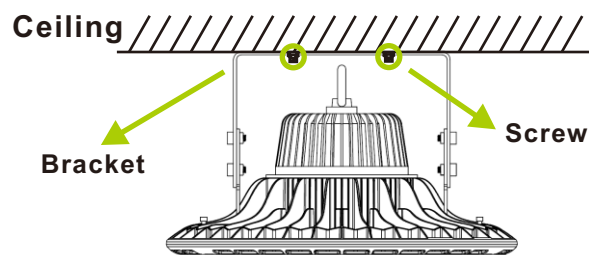

2.Bracket type

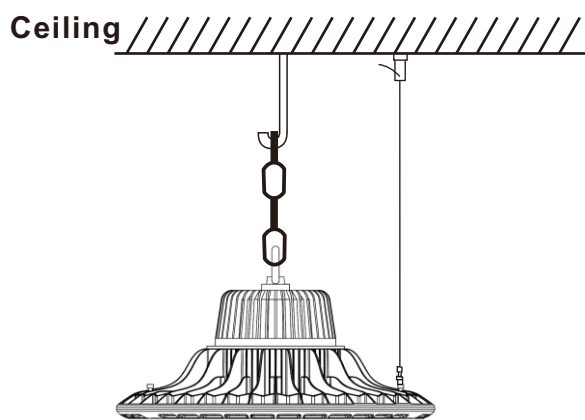

3.Suspension chain

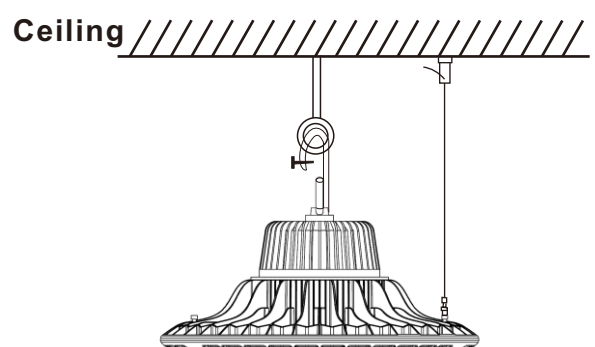

4.Hook hanger

PACKING INFO



Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
1pc/CTN	390*390*200mm	6.0kg	7.5kg	8.5kg