



LED Pizza Light

BRIGHTEN YOUR LIFE


NEW LED TECHNOLOGY THAT ALLOWS THE
COEXISTENCE OF ENVIRONMENTAL
PROTECTION AND ENERGY SAVING

Benefits

- 1.MH/HPS/HID/MHL/CFL lamp retrofit
- 2.Screw Base Direct Install by bypass ballast
- 3.100% Pure Aluminum Fins Heat Sink
- 4.Universal Base E26/E27/E39/E40
- 5.ETL CETL DLC CE ROHS listed





BB-YPD-XXX-A

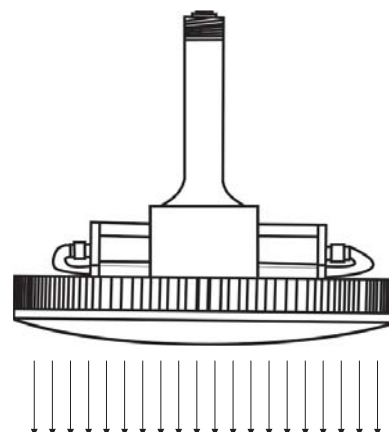


Features

1. Beam angle:120 degrees.
2. Aluminum fins heat sinks is good for heat dissipation.
3. It's major to replace the CFL/MH/HID/HPS.
4. Green, energy saving, long and reliable life of 50,000 hours.
5. No RF interference, No IR/UV radiation ,no mercury pollution.
6. Wide colour availability in degrees Kelvin(K),2700-6700K.
7. Streamline exterior design, beautiful appearance.
8. Environment friendly ,energy saving (70~80%).
9. Special circuit design, each LED work separately,
avoiding the single broken LED influence problem.



Application

1. Area Lighting/Street Lighting.
2. Garage Lighting/Ceiling Lighting.
3. Warehouse Lighting.
4. High/Low Bay Lighting.

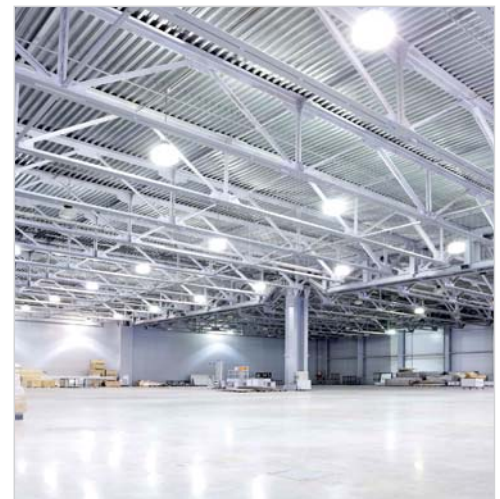


SPECIFICATIONS

Power	60W	80W	100W	120W	150W
Model	BB-YPD-022-A	BB-YPD-023-A	BB-YPD-024-A	BB-YPD-025-A	BB-YPD-026-A
Luminous Flux	7200lm	9600lm	12000lm	14400lm	18000lm
Replacement	HPS 175W	HPS 250W	HPS 300W	HPS 400W	HPS 600W
Poles	L: Long Pole S: Short Pole				
Voltage	LV:100-277VAC HV:200-480VAC				
Frequency	50-60HZ				
Light Source	SMD LED				
Luminous Efficacy	>120lm/w				
Operation Temp.	-40 to +45℃				
CCT	2700K SW / 3000K WW / 4100K NW / 5000K DW / 5700K CW				
CRI	85				
Life Span	50,000 hours at 25℃				
Driver	UL listed power supply				
Dimming	NO				
Beam Angle	120°				
Lamp Base	E26/E27/E39/E40				
PF	>0.95				
Warranty	5Years				

DIMENSIONAL DRAWING

Dimensions with cover

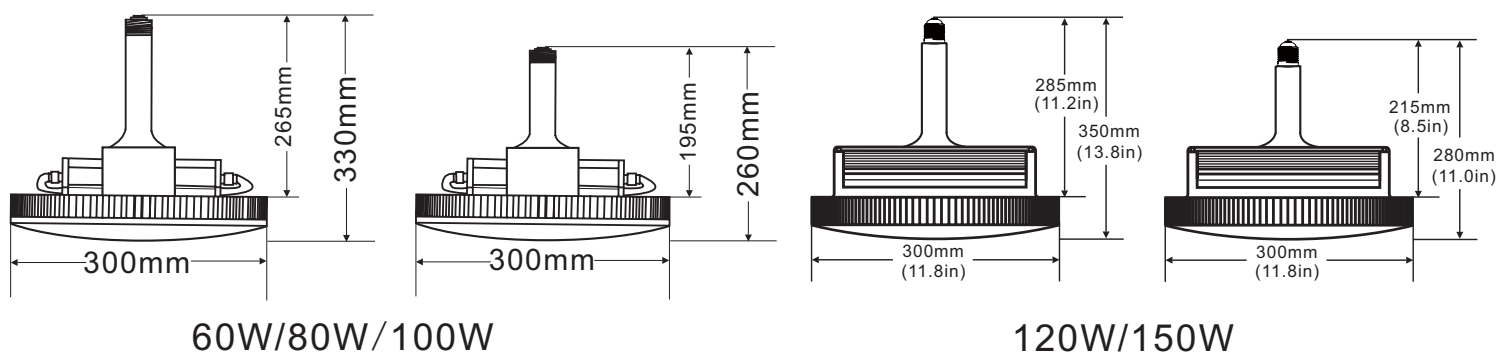



* The height of the cover is 30mm(1.18in).

* Dimensions without cover is 30mm less than the height above, the others are the same.

GENERAL INFORMATION


Order code		Power	Voltage	Poles	Lumen(lm)	CRI	Repalcement
BB-YPD-022-A	BB-YPD-022-A-L-LV	60W	100-277VAC	Long	7200	85	HPS 175W
	BB-YPD-022-A-L-HV	60W	200-480VAC	Long	7200	85	HPS 175W
	BB-YPD-022-A-S-LV	60W	100-277VAC	Short	7200	85	HPS 175W
	BB-YPD-022-A-S-HV	60W	200-480VAC	Short	7200	85	HPS 175W
BB-YPD-023-A	BB-YPD-023-A-L-LV	80W	100-277VAC	Long	9600	85	HPS 250W
	BB-YPD-023-A-L-HV	80W	200-480VAC	Long	9600	85	HPS 250W
	BB-YPD-023-A-S-LV	80W	100-277VAC	Short	9600	85	HPS 250W
	BB-YPD-023-A-S-HV	80W	200-480VAC	Short	9600	85	HPS 250W
BB-YPD-024-A	BB-YPD-024-A-L-LV	100W	100-277VAC	Long	12000	85	HPS 300W
	BB-YPD-024-A-L-HV	100W	200-480VAC	Long	12000	85	HPS 300W
	BB-YPD-024-A-S-LV	100W	100-277VAC	Short	12000	85	HPS 300W
	BB-YPD-024-A-S-HV	100W	200-480VAC	Short	12000	85	HPS 300W
BB-YPD-025-A	BB-YPD-025-A-L-LV	120W	100-277VAC	Long	14400	85	HPS 400W
	BB-YPD-025-A-L-HV	120W	200-480VAC	Long	14400	85	HPS 400W
	BB-YPD-025-A-S-LV	120W	100-277VAC	Short	14400	85	HPS 400W
	BB-YPD-025-A-S-HV	120W	200-480VAC	Short	14400	85	HPS 400W
BB-YPD-026-A	BB-YPD-026-A-L-LV	150W	100-277VAC	Long	18000	85	HPS 600W
	BB-YPD-026-A-L-HV	150W	200-480VAC	Long	18000	85	HPS 600W
	BB-YPD-026-A-S-LV	150W	100-277VAC	Short	18000	85	HPS 600W
	BB-YPD-026-A-S-HV	150W	200-480VAC	Short	18000	85	HPS 600W

LUMINOUS INTENSITY DISTRIBUTION

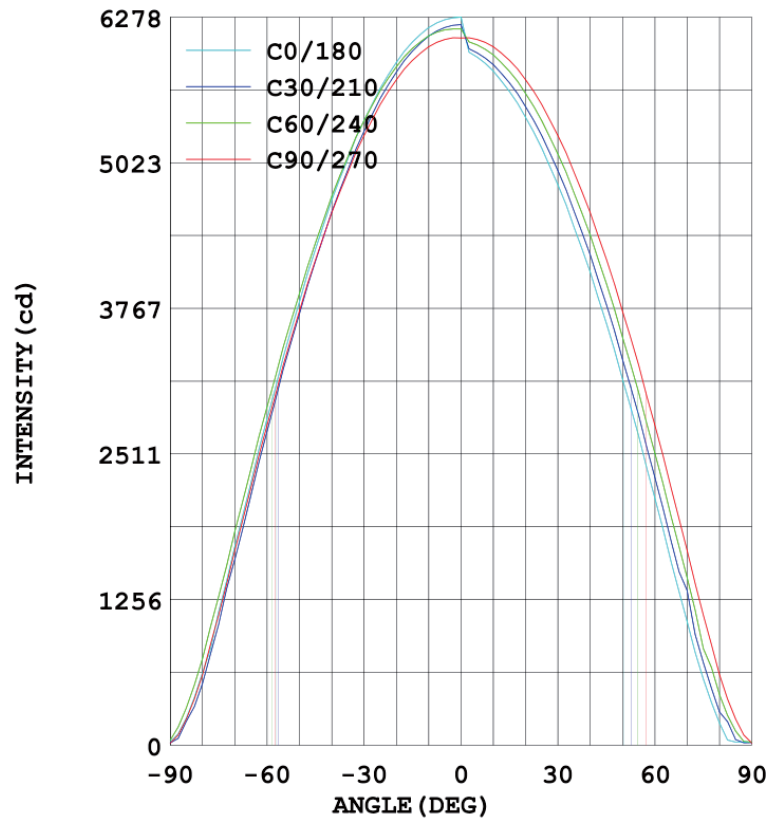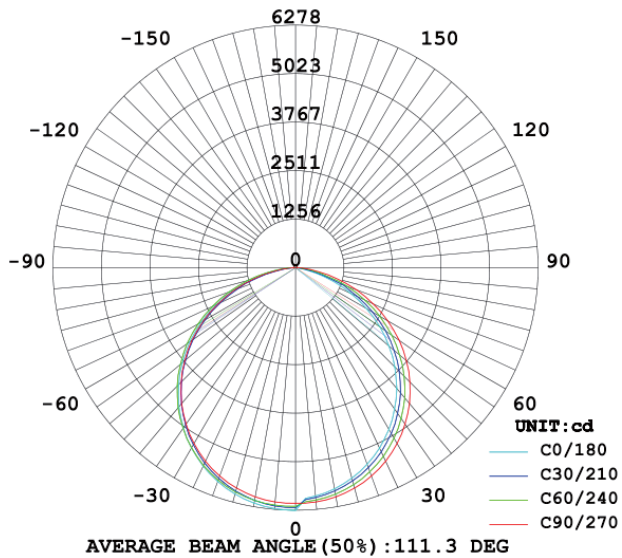

PROJECTS

By using our 120W Pizza Light to replace 400W Metal Halide bulb for warehouse high bay lighting fixtures, the customer is now able to save a lot per month from his electric bill.

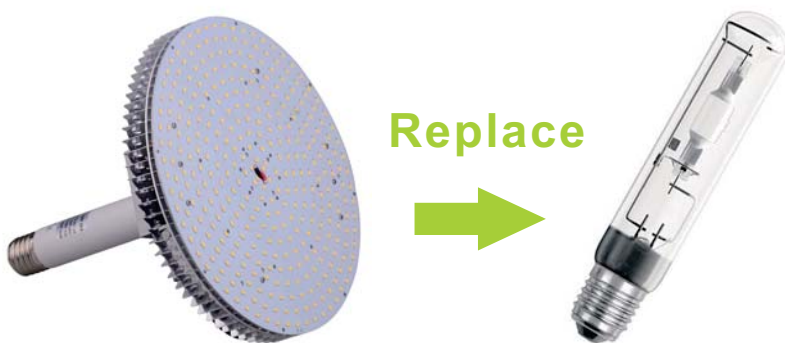

120W LED = 400W MH




Note:

- Don't take the LED lamp apart.
- The LED lamp must work under the right voltage according to the specification.
- Must remove the Ballast, Capacitor, Ignitor before installing our LED Light.


INSTALLATION

Normally. The traditional lamp has the ballast or capacitor or ignitor, like HPS, MH.

Replace E40/E27 CFL

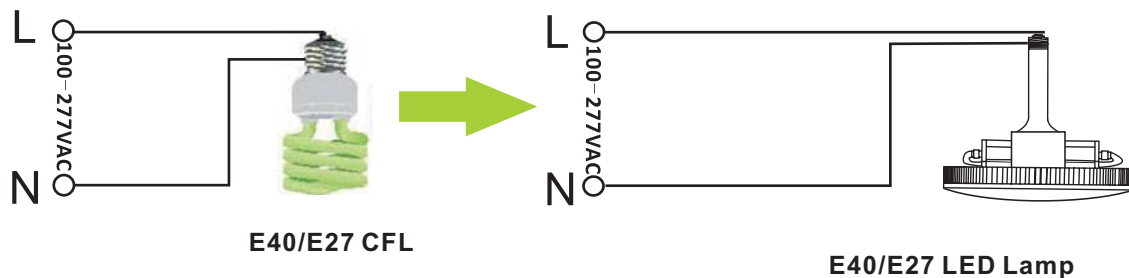


Replace HPS/MH

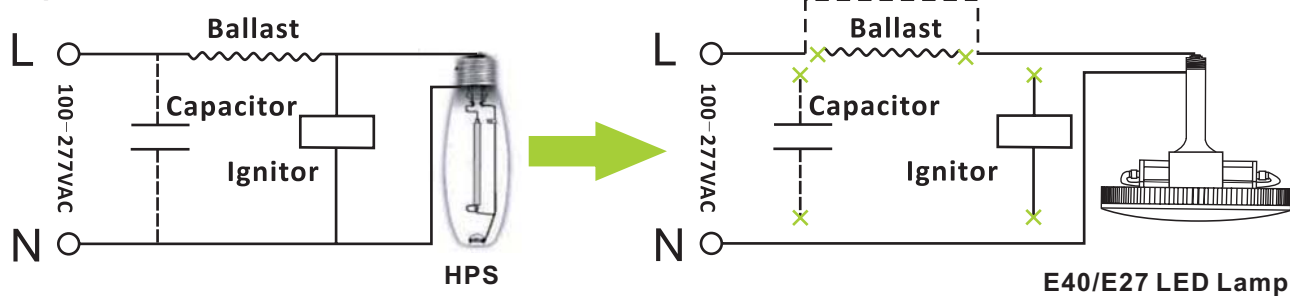

Note: remove the Ballast, Capacitor parts

E27/E40 Pizza Light has two kinds of installation:

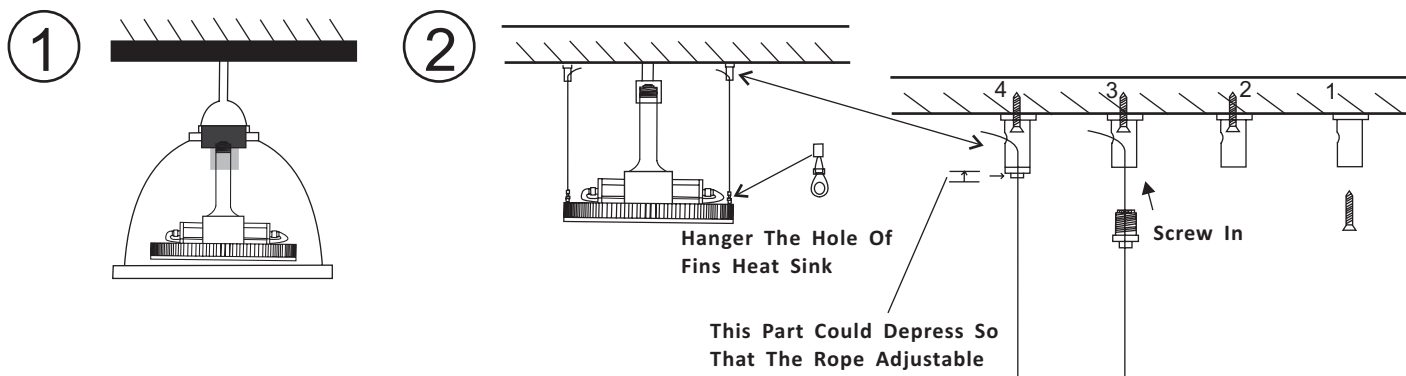

PACKING INFO



Packaging	Carton Size(mm) (L*W*H)	N.W	G.W	Volume weight
I) 2pc/CTN	510*365*365mm	5.0kg	6.5kg	17.5kg
II) 3pc/CTN	510*365*365mm	10.0kg	12.0kg	17.5kg

I ---Complete packing

II ---Packing with long stem off