





- ❖ We have the only laminate base production line in Northern China, integrated work from raw materials to finished products.
  - ❖ We have the right to use the patent of the castle to meet the buyer's demand for patents during import.
  - ❖ We have our own patent for the production of base laminate, only one in China. Patent number 2794779.
  - ❖ Professional production and OEM processing for more than 20 well-known brands in China and abroad.
  - ❖ We produce environmentally friendly laminate (E0, E1).
- We are the top ten brands in the flooring industry in China.







## Produce Process

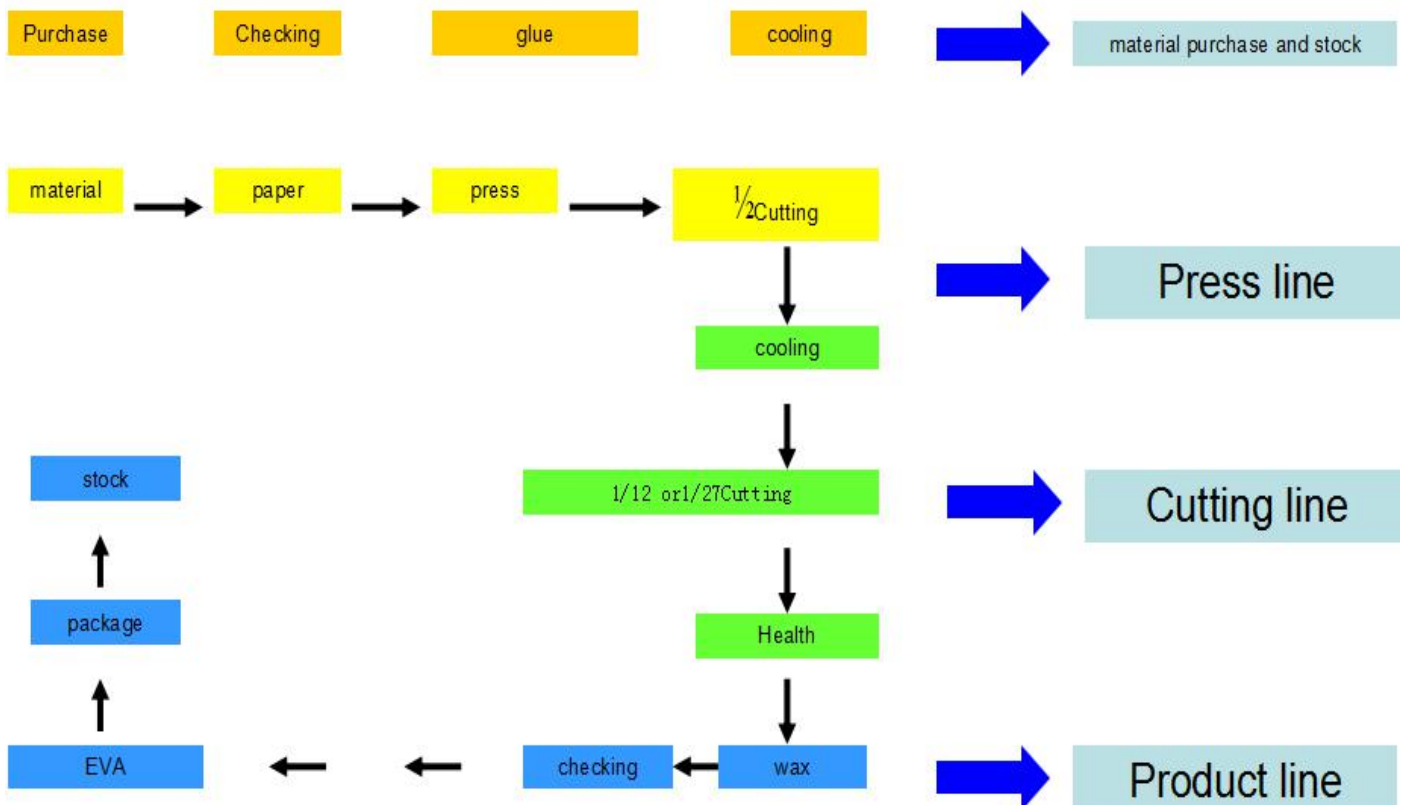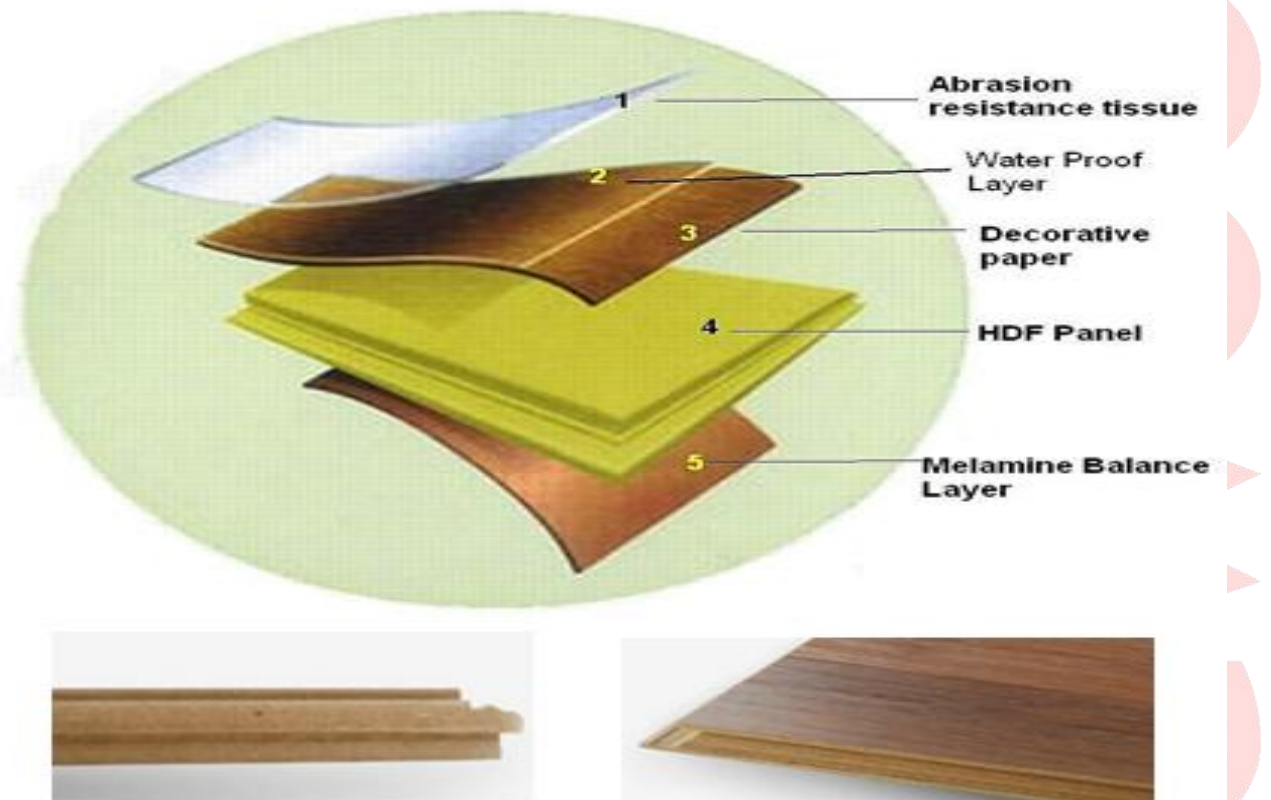

## Our Equipment for Press and Cutting





## Slotting

1



2



4



3



## Quality Checking System



**Flooring Surface checking**



**connection checking**



**click checking**

## Wear Layer Testing



## Formaldehyde Testing






## 1. Laminate Flooring




## 2. Parquet Flooring

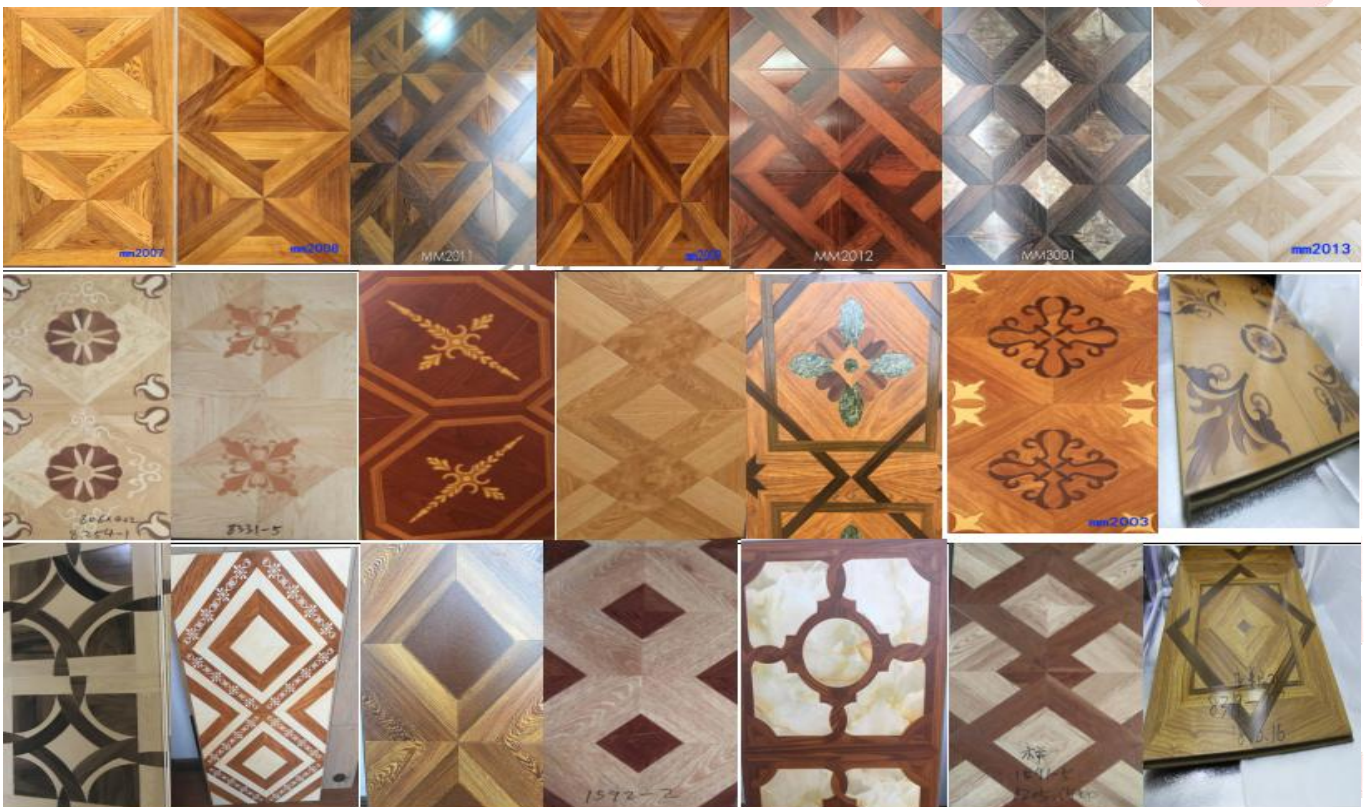

### 3.Spc Flooring



### 4.MDF HDF Board

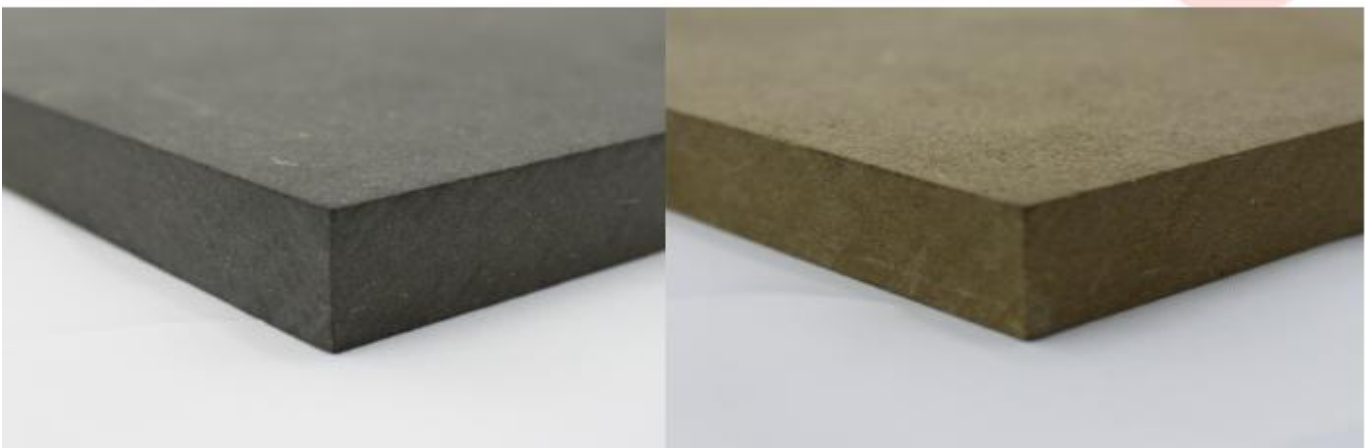

### 5.HPL Board





## Product Specifications

Index	Requirements	Test method
Element thickness	6,8,10,12mm $t_{max}-t_{min} \leq 0.5\text{mm}$	GB/T18102---2007
The length of the surface layer	Surface length deviation When the nominal length $L_n \leq 1500\text{ mm}$ , the absolute difference between $L_n$ and each measured $L_n$ value is $\leq 2.0\text{ mm}$	GB/T18102---2007
Surface layer width(mm)	$\pm 0.1\text{mm}$	GB/T18102---2007
Element rectangle(mm)	$G_{max} \leq 0.2\text{ mm}$	GB/T18102---2007
The straightness of the edges of the surface layer mm/m	$S_{max} \leq 0.3\text{ mm/m}$	GB/T18102---2007
The warp surface of the element in length and width F, %	$F_w \text{ вып } f \leq 0.20\%$ $F_w \text{ бор } f \leq 0.5\%$ $F_l \text{ вып } f \leq 1.00\%$ $F_l \text{ бор } f \leq 0.5\%$	GB/T18102---2007
The gap between the connected elements O,(mm)	$O_{cp} \leq 0.15\text{ mm}$ $O_{max} \leq 0.20\text{ mm}$	GB/T18102---2007
The difference in height between the connected elements H,(mm)	$H_{cp} \leq 0.10\text{ mm}$ $H_{max} \leq 0.15\text{ mm}$	GB/T18102---2007
The resistivity of the normal separation of the coating( M/Pa)	$\geq 1.0$	GB/T18102---2007

Formaldehyde test mg / l	≤1,5 E1)	GB/T18102---2007
Thickness swelling in 24 hours	≤18%	GB/T18102---2007

Wear resistance class	Abrasion resistant paper	Turnover(GB/T18102---2007)
AC1	18g	1500
AC2	25g	2500
AC3	33g	>4000
AC4	45g	>6000

density	710kg/m <sup>3</sup> , 750kg/m <sup>3</sup> , 800kg/m <sup>3</sup> , 805kg/m <sup>3</sup> , 810kg/m <sup>3</sup> , 830kg/m <sup>3</sup> , 850kg/m <sup>3</sup> , 900kg/m <sup>3</sup> , 1000kg/m <sup>3</sup> , 1200kg/m <sup>3</sup> .
size	1215*125*8/10/12mm, 1215*196*8/10/12mm, 1215*400*8/10/12mm, 1216*127*8/10/12mm, 1216*167*8/10/12mm, 1216*197*8/10/12mm, 1216*294*8/10/12mm, 1218*127*8/10/12mm, 1218*167*8/10/12mm, 1218*170*8/10/12mm, 1218*196*8/10/12mm, 1218*197*8/10/12mm, 1218*198*8/10/12mm, 1219*197*8/10/12mm, 1220*129*8/10/12mm, 1220*148*8/10/12mm, 1220*198*8/10/12mm, 2200*240*8/10/12mm, 2400*300*8/10/12mm, 806*403*8/10/12mm, 810*130*8/10/12mm, 810*148*8/10/12mm

## Our Customer

### Наши партнеры



Америку «I-MAXX»



Америку «LEGNO FLOORING»



Дубай «BLUE DIAMOND»



Америку «Lions floor»



Америку «PATINA DESIGN»



Казахстан «Chingiz»



Америку «NATURE FLOORING»



Америку «Owens Flooring»



Россия «МТКК»





**The company's sales and service network covers all major cities of China and is exported to 25 countries and regions, such as Europe, America and the Middle East. At the same time, it provides professional production and OEM processing for more than 20 well-known brands both domestically and abroad and is well received by consumers and OEM customers.**

**Contact: [caimingwood.com](http://caimingwood.com)**

**Mail: [Honey@caimingwood.com](mailto:Honey@caimingwood.com)**

**Tel: +8615965635091,+8617615827869**

**WeChat: +8615965635091**

**Whatsapp: +8615965635091**

**Telegram: 8615965635091**

**Skype:Honey.cici1**

**Welcome to contact us and visit our factory!**