



旭川化学

XUCHUAN CHEMICAL

Professional Manufacturer of Polyurethane

专业的聚氨酯制造商

A CREATE
BETTER
LIFE



Operating data



7 billion yuan
in 2021



Overseas business in
40 countries



TOP2 Domestic
market share



750000 tons
total capacity



1200+
employees



4 production sites
1 Under construction

Primary business & Market



- Polyurethane resin for artificial leather
- Polyurethane system for shoe sole
- Polyester polyol

R&D center


- Suzhou Large Enterprise Leading Enterprise Advanced Technology Research Institute
- Provincial Polyurethane Application Engineering Technology Center
- Key high-tech enterprises of the National Torch Program
- Jiangsu Postdoctoral Innovation Experimental Base
- 138+PhD and Master in polyurethane industry

Production sites



Enterprise scale

Production ability

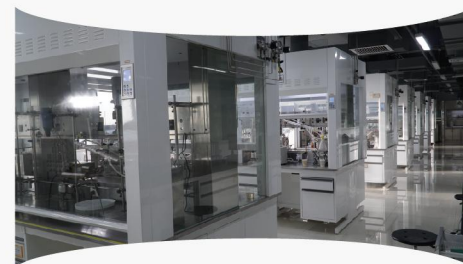

INTELLIGENT MANUFACTURING SYSTEM
PROFESSIONAL TECHNICAL TEAM
SOPHISTICATED EQUIPMENT

Pu Resin For Ink

Capacity



8000 tons/year


Characteristics



Retort resistance



Good solubility



Excellent for
pigment dispersion



Good adhesion

Code	Solid Content%	Viscosity(mpa.s/25°C)	Application	Advantage
------	----------------	-----------------------	-------------	-----------

Gravure printing

XCU-6030H	30±2	400-1000	Color ink	<ul style="list-style-type: none"> ·Boiling resistance ·Good printability ·Good ester solubility ·Suitable for various pigment
XCU-TT7030	30±2	300-800	Color ink	<ul style="list-style-type: none"> ·Good color performance, especially black ·Suitable for high speed print
XCU-68830	30±2	700-1000	White ink	<ul style="list-style-type: none"> ·Great bonding strength, like OPP film ·Good redissolution
XCU-TT7230-1	30±2	700-1000	White ink	<ul style="list-style-type: none"> ·Good bonding strength, like OPP film ·Good redissolution ·Resistance to blocking tendency
XCU-TT7230-2	30±2	800-1100	White ink	<ul style="list-style-type: none"> ·Good bonding strength, like OPP film ·Resistance to blocking tendency ·Suitable for heat transfer printing
XCU-TT7330H	30±2	900-1200	White ink	<ul style="list-style-type: none"> ·Good for heat resistance ·Resistance to blocking tendency

Code	Solid Content%	Viscosity(mpa.s/25°C)	Application	Advantage
------	----------------	-----------------------	-------------	-----------

Flexo printing

XCU-6030AD	30±2	600-1000	Flexo printing ink	<ul style="list-style-type: none"> ·Good color performance ·Alcohol suitability
XCU-2045AD	45±2	1200-2500	Flexo printing ink	<ul style="list-style-type: none"> ·High solid content ·Good color performance ·Alcohol suitability

Surface printing

XCU-2070	70±3	800-2000	Simi-film polyether resin	<ul style="list-style-type: none"> ·Ester suitability ·Good bonding strength, like PE film
XCU-2070B	70±3	800-2000	Simi-film polyether resin	<ul style="list-style-type: none"> ·Ester suitability ·Good bonding strength, like OPP and PE film
XCU-2075AD	75±3	500-2000	Non-reactive plasticized resin	<ul style="list-style-type: none"> ·NC system suitability ·Good printability ·High glossiness ·Alcohol suitability

Water based ink resin

XCU-8040A-5	40±2	10-500	Universal resin	<ul style="list-style-type: none"> ·Pigment grinding ·Good bonding strength, like OPP and PET film ·Alcohol tolerance ·Low odor
-------------	------	--------	-----------------	---



www.xuchuanchem.com

Xuchuan

XUCHUAN CHEMICAL(SUZHOU)CO.,LTD

Professional Manufacturer of Polyurethane



service@chinaxuchuan.com



0512-53981888/+8613913782587



No.3, Xiexin Road, Taicang Port Development
Zone, Taicang City, Jiangsu , China (215434)

All pictures from the network,if there is infringement,please contact us to delete

xuchuan