



Application:

- For standard 19 inch or 23 inch power cabinets
- Network connection equipment of communication system
- Power system of special network or local area network
- UPS, standby power supply
- Power station systems
- Marine systems

Specifications

Battery Model	12V100AF
Nominal Voltage	12V
Rated Capacity	100Ah (10 hour rate) to 1.80V/cell @25°C(77°F)
Typical Weight	33.0kg
Internal Resistance	Approx 6.59mΩ
Temperature Ranges	Operation (maximum): -40°C to 50°C(-40°F to 122°F)
	Operation (recommended): 15°C to 25°C(59°F to 77°F)
	Storage: -20°C to 40°C(-4°F to 104°F)
Float Voltage	2.25V/cell@25°C(77°F)
Recommended Maximum Charging Current Limit	25A
Equalize and Cycle Service	2.35V~2.40V/cell@25°C(77°F)
Self Discharge	The residual capacity is above 90% after 90 days storage(25°C/77°F)
Terminal	M6 Female
Terminal Hardware Torque	8 ± 1.0Nm
Container Material	ABS (V0 optional)


Constant Current Discharge Characteristics Units: Amperes (25°C, 77°F)

End voltage per cell	5MIN	15MIN	30MIN	45MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	12HR	20HR	24HR
1.60V	359.2	193.0	117.4	84.9	68.6	39.3	28.6	22.4	18.9	16.2	12.5	10.3	8.70	5.45	4.55
1.67V	337.3	186.1	115.4	84.2	68.2	39.1	28.1	22.3	18.8	16.1	12.4	10.2	8.69	5.40	4.51
1.70V	334.3	183.1	113.4	83.6	67.7	38.8	27.9	22.2	18.5	15.9	12.4	10.2	8.60	5.39	4.51
1.75V	307.5	177.1	112.4	83.0	66.7	37.8	27.6	21.9	18.4	15.8	12.3	10.1	8.60	5.38	4.51
1.80V	275.6	165.2	107.5	79.6	65.0	37.5	27.4	21.8	18.0	15.5	12.2	10.0	8.53	5.32	4.50
1.83V	262.7	151.2	105.5	76.9	62.1	37.0	26.5	20.8	17.4	15.0	11.9	9.61	8.11	5.31	4.43
1.85V	245.8	147.3	98.1	73.9	60.2	35.6	25.8	20.6	17.0	14.6	11.5	9.53	8.02	5.21	4.39

Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)


End voltage per cell	5MIN	15MIN	30MIN	45MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR	12HR	20HR	24HR
1.60V	601.0	339.3	211.9	159.2	129.5	74.3	54.3	43.0	36.3	31.3	24.2	19.9	16.7	10.8	8.98
1.67V	578.1	333.3	209.9	158.2	128.5	74.1	53.6	42.9	36.3	31.1	24.1	19.7	16.7	10.7	8.98
1.70V	575.1	329.3	209.9	158.2	128.5	73.8	53.6	42.7	35.8	30.9	23.9	19.5	16.6	10.7	8.96
1.75V	536.3	327.4	209.0	157.2	126.5	73.4	53.0	42.7	35.8	30.8	23.7	19.5	16.5	10.7	8.96
1.80V	492.5	309.4	204.0	154.2	125.5	73.2	52.9	42.6	35.2	30.5	23.6	19.5	16.5	10.7	8.94
1.83V	470.6	283.6	202.0	149.3	120.5	72.3	51.6	41.0	34.4	29.6	23.4	19.0	16.0	10.7	8.88
1.85V	439.8	276.6	187.1	143.3	116.5	69.9	50.2	40.5	33.6	29.0	22.7	18.8	15.8	10.5	8.81

Terminal Voltage(V) Vs. Discharge Time (25°C, 77°F)

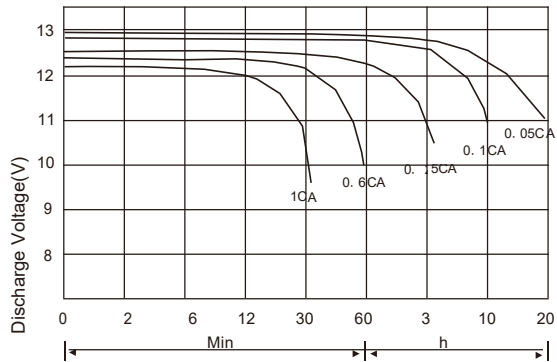


Battery Voltage Vs. Charge Time


Charge Characteristic

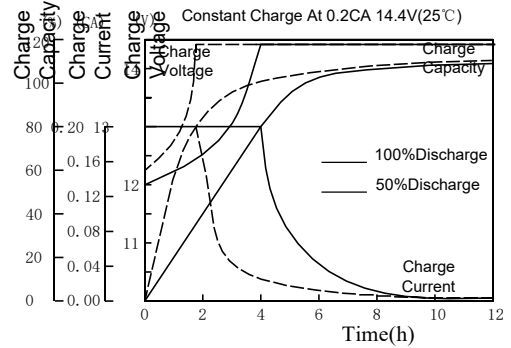

Relationship of OCV Vs. State of Charge

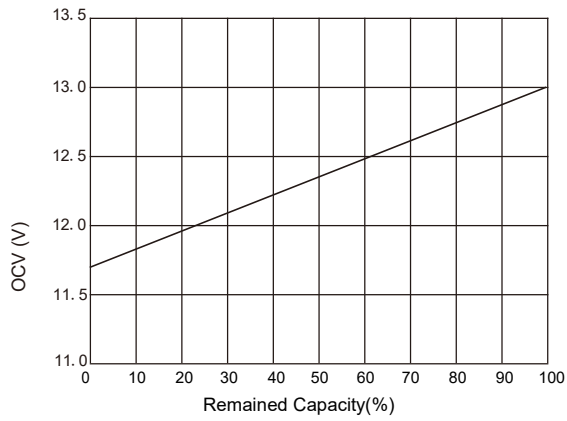

Capacity Retention Characteristic

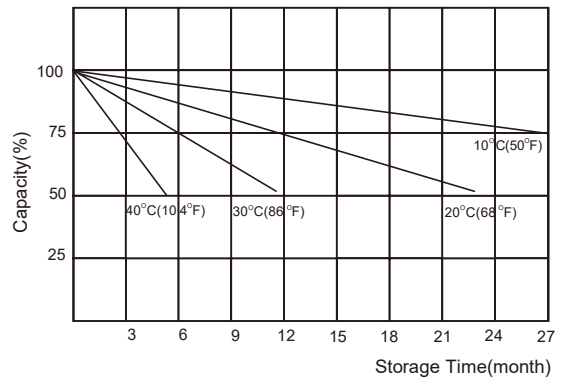

Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle	25°C	2.40	2.35~2.40	0.25C
Standby	25°C	2.25	2.23~2.27	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.80	1.70	1.55	1.30
Discharge Current (A)	0.2C ≥ (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C

