


NS-2805
工業乾衣機
Industrial Drying Tumbler



NS-2805-5.5-S

- 適用於烘干各種棉織、牛仔、梭織、針織、化纖等衣物
- 蒸汽熱交換器備自動冷風門，通過控制冷風對內膽衣物進行冷卻從而確保乾衣質量
- 采用PLC及人性化觸摸顯示屏控制，自動化程度高，使用簡單、方便
- 采用變頻控制系統，內膽轉動可實現變頻調速(調速範圍：5 ~ 27 rpm)，可定時正、反轉動，使衣物均衡滾動
- 采用自動升降門控制裝置，可自動開關前門，還設有手動小門，方便檢測
- 采用自動除塵裝置，降低對空氣質量所造成的負面影響
- 機身可傾斜倒料，減少人力
- 加熱方式有蒸汽熱型、瓦斯熱型供選擇
- Suitable for drying garments of various fabrics such as cotton, denim, woven fabric, knit fabric, synthetic fabric, etc.
- Steam heat exchanger is equipped with a pneumatic air damper for flow rate control of fresh air going into the inner drum, thereby ensuring the drying quality
- Adopt PLC and user friendly touch screen for operation, highly automated and easy to operate
- With inverter for continuous speed variation of inner drum (range:5 ~ 27 rpm), which can rotate clockwise or counter clockwise according to the preset time so that garment will tumble evenly
- With automatic lifting front door; a small manual window for convenient drying status monitoring
- Dust collecting device could minimize negative impact to air quality
- The machine body can tilt for faster unloading so as to save labor
- Heating modes include steam heated, gas heated for selection

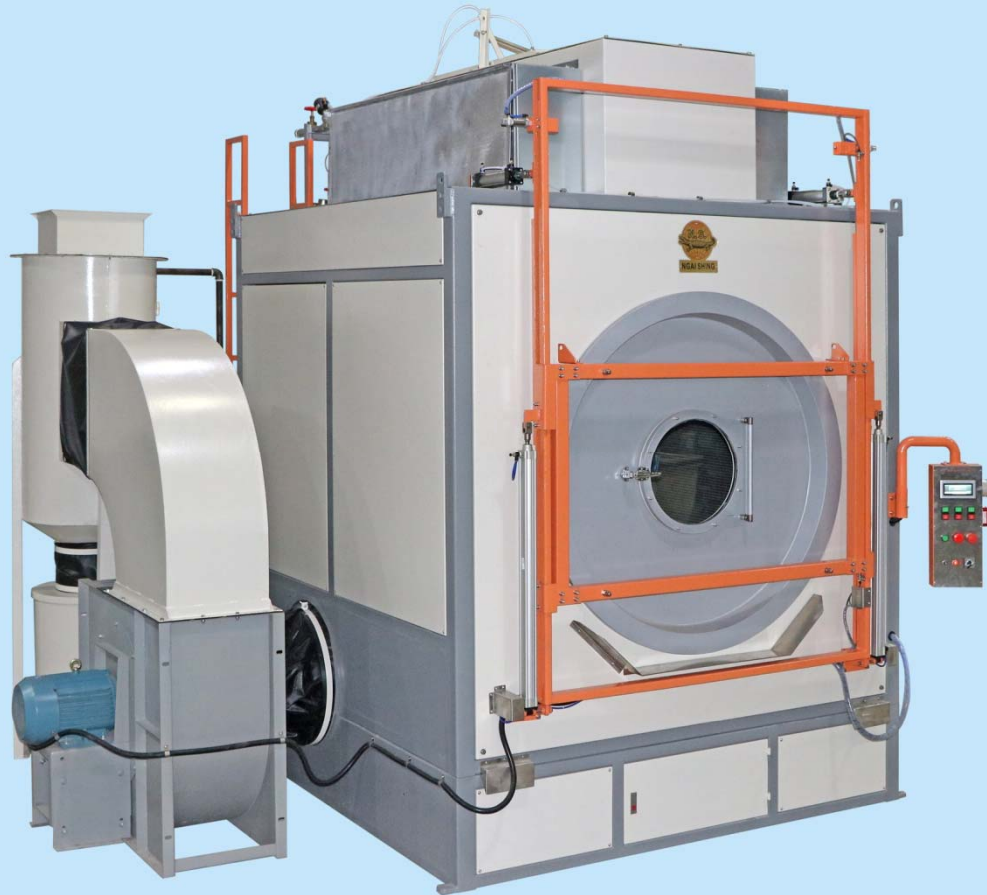


機身傾斜倒料
Machine body tilting for garment unloading



蒸汽熱交換器(帶冷風門)
Steam Heat Exchanger (with Cold Air Damper)



瓦斯熱交換器(原裝意大利燃燒機)
Gas Heat Exchanger (Burner imported from Italy)

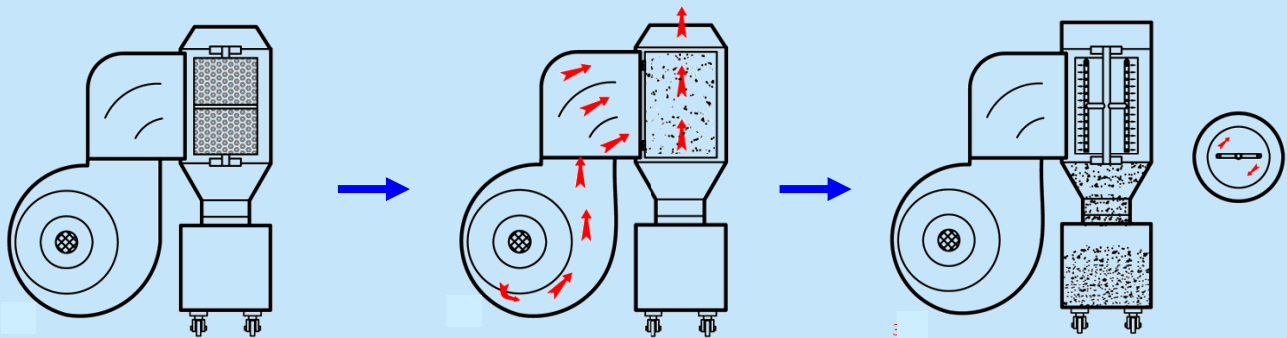

自動環保除塵系統工作原理圖
Work principle of environment-friendly automatic de-dusting & filtering system

型號 Model	內膽容積(m³) Inner Drum Capacity	加熱方式 Heating Mode	電源 Power Supply	總功率(kW) Total Power	內膽尺寸(mm) Inner Drum Size	耗壓縮空氣量(L/min) Compressed Air Consumption	蒸汽壓力 (kgf/cm²) Steam Pressure	耗蒸汽量(kg/hr) Steam Consumption	機身尺寸(mm) Machine Size (LxWxH)
NS-2805-3-S	3	蒸汽熱型 Steam heated	3PH/380V/50Hz	4.5	Ø1778x1194	30	3~5	150~180	3180x2300x3060
NS-2805-4-S	4			11.1	Ø1880x1500			220~264	3480x3300x3360
NS-2805-5.5-S	5.5			11.1	Ø1880x1910			275~330	3480x3700x3360

型號 Model	內膽容積 (m³) Inner Drum Capacity	加熱方式 Heating Mode	電源 Power Supply	總功率 (kW) Total Power	內膽尺寸 (mm) Inner Drum Size	石油氣壓力 (mbar) LPG Pressure	石油氣消耗量 (kg/hr) LPG Consumption	天然氣壓力 (mbar) Natural Gas Pressure	天然氣消耗量 (m³/hr) Natural Gas Consumption	耗壓縮空氣量 (L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size (LxWxH)
NS-2805-3-G	3	瓦斯熱型 Gas heated	3PH/380V/50Hz	5	Ø1778x1194	20~35	1.4~4.6	15~100	1.8~5.8	30	3180x2300x3060
NS-2805-5.5-G	5.5			11.5	Ø1880x1910		3.2~9		4.2~11.8		3480x3700x3090



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F, 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com