

NS-2712-20 / 30 / 50

NS-2713-20 / 30 / 50

工業洗衣機 Industrial Washing Machine



NS-2712-50

- 適用於各種梭織、針織衣物的普洗、酵洗、套色
- 採用牙箱減速
- 內膽可定時正、逆轉動
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 配備數字式溫度控制器控制，溫度控制更精確
- 內外膽採用SUS 304不鏽鋼，內膽孔徑Ø6mm
- **NS-2712**系列採用蒸汽直接加熱
- **NS-2713**系列採用蒸汽直接加熱與間接加熱相結合

選購件:

- 蒸汽氣動閥總成
- 疏水閥總成(NS-2713系列)
- 手控氣動入水系統
- 手動改氣動排水控制系統
- 速度控制器系統

- Suitable for garment wash, stone wash and tinting of various garments made of woven, knit fabrics
- Adopt gear box to decrease speed
- Inner drum can rotate forward and backward rotation according to preset time
- Automatic washing time control; up-to-temperature timing and immediate timing available for selection
- Equipped with digital temperature controller for accurate temperature control
- SUS 304 Stainless steel inner & outer drums, inner drum bore size Ø6mm
- **NS-2712** series adopts direct steam heating
- **NS-2713** series adopts direct steam heating and indirect heating Combination

Optional Accessories:

- Steam Pneumatic Valve Assy
- Steam Trap Set (NS-2713 series)
- Manual Controlled Pneumatic Water Feeding System
- Manual to Pneumatic Water Draining Control System
- Speed Control System



蒸汽直接加溫裝置(NS-2712)
Direct steam heating device (NS-2712)



蒸汽直接加溫與間接加溫裝置(NS-2713)
Direct and indirect steam heating device(NS-2713)




牙箱馬達減速
Speed reduction through gear box



手動排水裝置
Manual water discharge device





蒸汽間接加溫內部管道圖(NS-2713系列)
Indirect heating device (NS-2713 series)

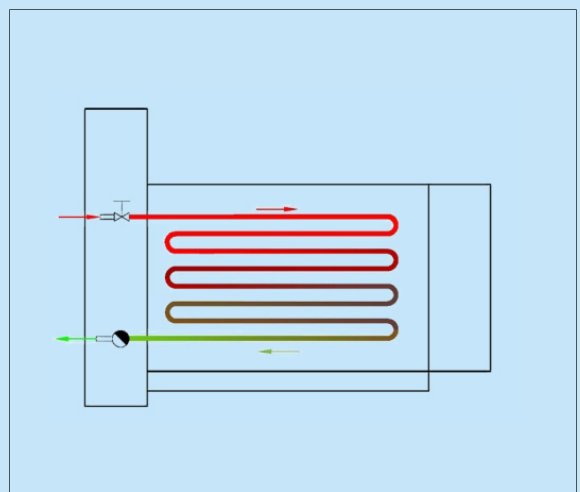

蒸汽間接加溫示意圖(NS-2713系列)
Indirect steam heating diagram (NS-2713 series)

選購件(Optional Accessories):

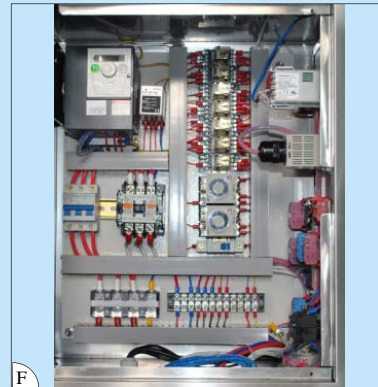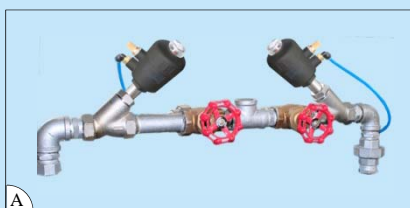

序號 Serial No.	編號 Part No.	中英文名稱Description	適用於 Suitable for
A	O-I-01-6	蒸汽(直接/間接加溫)氣動閥總成-Ø½" Steam(Direct/Indirect Heating) Pneumatic Valve Assy-Ø½"	NS-2713-20/30/50
B	O-I-01-7	蒸汽氣動閥總成-Ø½" Steam Pneumatic Valve Assy-Ø½"	NS-2712-20/30/50
C	O-I-03-3	疏水閥總成-Ø½" Steam Trap Set-Ø½"	NS-2713-20/30/50
D	O-I-04-1	手控氣動入水系統-Ø1" Manual Controlled Pneumatic Water Feeding System-Ø1"	NS-2712-20/30/50, NS-2713-20/30/50
E	O-I-07-1	手動改氣動排水控制系統-Ø5" Manual to Pneumatic Water Draining Control System-Ø5"	NS-2712-20/30/50, NS-2713-20/30/50
F	O-I-10-1	速度控制器系統 1.5kW Speed Control System 1.5kW	NS-2712-20/30/50, NS-2713-20/30/50

型號 Model	容量(LBS) Capacity	電源 Power Supply	馬達(kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	水容量(L) Water Capacity	入水口 (inch) Water Inlet	出水口 (inch) Water Outlet	洗衣速度(RPM) Washing Speed	機身尺寸(mm) Machine Size	
NS-2712-20	20	3PH/380V/50Hz	0.75	12	Ø730x250x2	Ø830x380x1.5	103	Ø2" x1pc	Ø5" x1pc	30~33	980x1130x1780	
NS-2713-20							111					
NS-2712-30	30			28	Ø730x380x2	Ø830x500x1.5	135					
NS-2713-30							146					
NS-2712-50	50			30	Ø730x630x2	Ø830x760x1.5	206					1360x1130x1780
NS-2713-50							221					



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852)2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852)2785 3149 Http://www.ngaishing.com