



# NS-6039-3 自動模板機 Automatic Template Machine



|  |   |         |             |  |
|--|---|---------|-------------|--|
|  |   |         |             |  |
|  | 2 | 3500RPM | DPx17 75/11 |  |



運領工作中  
Stitching collar



運袖口工作中  
Stitching cuff

- 適用於自動車縫領，袖口，袋蓋等恤衫裁片
- 採用PLC可編程控制器和人性化觸摸顯示屏，操作方便快捷
- 可根據膠板模型，預設車縫圖樣，使每件裁片車縫效果一致，大大提高工作效率及質量
- 車縫速度和針步長度可調，滿足不同車縫需求
- 獨特的領尖定位功能和自動疏密針，可使車縫的尖角和圓角更自然順滑
- 自主研發同步核心技術，針步、模板同步處理，車縫效果更佳
- 備布邊修剪器，實現自動修剪布邊，提高工作效率
- 最長縫領長度為500mm
- 整個車縫工序均自動化，適合生手工人操作
- 客戶可選購NS-101制作不同形狀的膠板模型配合本機使用

#### 跟機件：

縫紉機(JUKI DDL-9000B-SS-OB/CP18A)

- Suitable for automatically sewing shirt collar, cuff, pocket flap, etc.
- Adopt PLC and user friendly touch screen for easy operation
- Preset sewing pattern according to different plastic stitch jig to make sure that every cutting piece has the same sewing effect, so as to improve working efficiency and product quality greatly
- The sewing speed and stitch length can be adjusted to meet different sewing demands
- Special collar point positioning and automatic sparse or dense sewing to make a smooth round or sharp corner collar
- Self R&D synchronous core technology, stitch performs along plastic stitch jig to get a better sewing effect
- Equipped with fabric trimming cutter to trim fabric edge automatically for efficiency improving
- Max. processable collar length 500mm
- The whole sewing process is fully automated that even unskilled worker can handle it with ease
- Customers can purchase NS-101 additionally to fabricate stitch jigs of various shapes used on this machine

#### Standard:

Sewing machine head(JUKI DDL-9000B-SS-OB/CP18A)



轉彎感應系統  
Corner turning sensing system




人性化觸摸屏操作設定界面  
User friendly touch screen for operation setting




不銹鋼台面，耐磨性更高  
Stainless steel table top, high wearability

**跟機模 Standards:**




M01070102(坑位 Slot:1.1mm)




M21070103(坑位 Slot:1.1mm)


**選購件 options:**



M01070106(坑位 Slot:4mm)  
M01070107(坑位 Slot:1.1mm)

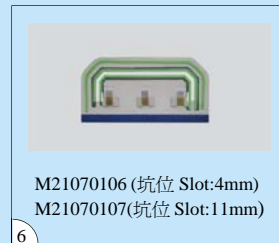


M21070106 (坑位 Slot:4mm)  
M21070107(坑位 Slot:1.1mm)



M24070101(坑位 Slot:1.1mm)



M23070101(坑位 Slot:4mm)  
M23070102(坑位 Slot:1.1mm)



M01070108(坑位 Slot:4mm)  
M01070109(坑位 Slot:1.1mm)



**跟機模：**

1. 尖角領模(標準)
2. 圓角袖口模(標準)

**選購件：**

- 3~5. 領模
6. 六角袖口模
7. 袋蓋模
8. NS-101 縫紉夾鑷坑機

**Standards:**

1. Sharp angle collar stitch jig (standard)
2. Round corner cuff stitch jig (standard)

**Options:**


- 3~5. Collar stitch jig
6. Hexagon cuff stitch jig
7. Pocket flap stitch jig
8. NS-101 Stitch Profile Clamp Milling Machine

**選購件Option:**

O-D-09-01  
物料架 Material stand

**選購件Option:**

O-D-09-01  
物料架 Material stand

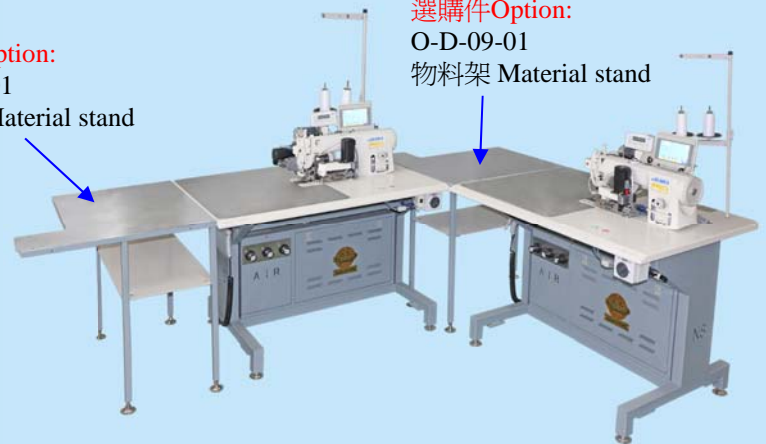

共需三人，兩人負責放料收料，一人操作機器，效率高  
Total 3 workers, among which 2 workers are for placing and collecting material, one worker for operating machines, high efficiency

| 型號<br>Model | 適用衣車頭機型<br>Applicable Sewing Head Model | 電源<br>Power Supply | 總功率(kW)<br>Total Power | 工作臺面尺寸(LxW)<br>Working Table Size(mm) | 車縫最大速度(RPM)<br>Max. Sewing Speed | 壓縮空氣壓力(kgf/cm <sup>2</sup> )<br>Compressed Air Pressure | 機身尺寸(mm)<br>Machine Size |
|-------------|---|--------------------|------------------------|---------------------------------------|----------------------------------|---|--------------------------|
| NS-6039-3   | JUKI DDL-9000B-SS-OB/CP18A              | 1PH/220V/50Hz      | 0.9                    | 1220x830                              | 3500                             | 5   | 1220x830x1590            |



**藝誠(余氏)發展有限公司**  
**Ngai Shing Development Limited**

香港九龍長沙灣永康街52號地下  
G/F, 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com  
Fax: (852) 2785 3149 Http://www.ngaishing.com