
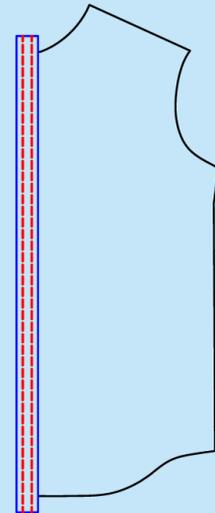


NS-6022-1

襯衫前幅鈕筒切樸器連收料架

Shirt Front Button Placket Interlining Cutting Device with Stacker

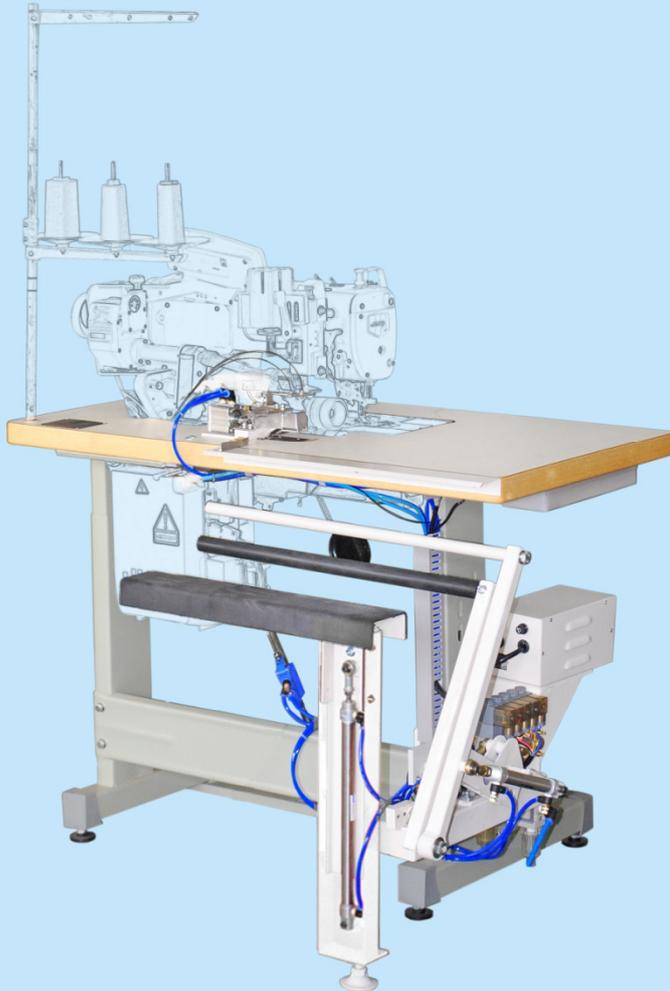

- 配合雙針平機，車縫男女裝帶樸前幅鈕筒
- 電眼感應，自動切筒並將裁片整齊疊好，減少人手收料工序，大大提高工作效率
- 撥布桿自動撥布
- 疊布架能提升，使操作者能在原位取裁片
- 結構緊湊美觀，易於安裝、清潔及維護
- 用戶需自備衣車頭

跟機件：

吹風檯板、腳架

- Suitable for sewing men's and ladies' front button placket with interlining, working together with a double-needle lockstitch machine
- Electric eye senses the operation of front placket cutting and cut pieces stacking in order automatically to simplify working procedure and increase work efficiency greatly
- Fabric poke rod can poke fabric automatically
- Fabric folding stand can uplift and help the operator to take the stacked pieces from seat
- Smart and compact design, easy to install, clean and maintain
- Users have to prepare sewing machine head by themselves

Standards:


Table Top With Air Blowing, Stand



收料架運行工作中
The stacker is working



原位取料
Take a bundle of cutting pieces from seat

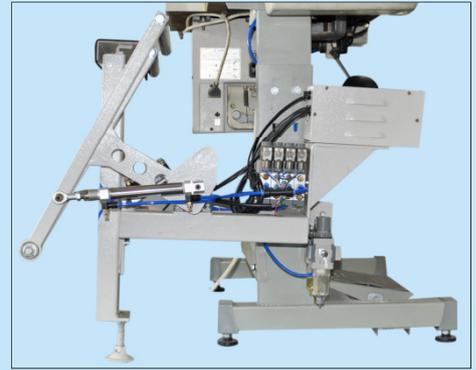

氣動元件圖
Pneumatic elements

跟機件：
Standard accessories:


吹風檯板
Short table with air blowing




A3001-1
L-型車腳架
L-shaped stand




收料架流程圖 Flow chart of working process :




1. 裁片車縫中
Sewing in process




2. 夾布桿夾布
Clamping fabric



3. 撥布桿撥布
Pushing fabric aside



4. 裁片車縫完成
Sewing finished



5. 收料架升起，方便取料
Stacker lifts up to collect material

型號 Model	適用衣車頭品牌 Brand of the Sewing M/c to be matched	適用衣車頭機型 Model of the Sewing M/c to be matched	電源 Power Supply	總功率(kW) Total Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	淨重(kg) Net Weight	機身尺寸(mm) Machine Size
NS-6022-1	兄弟 BROTHER	LT2-B842	1PH/220V/50Hz	0.05	5	10	58	1165x1050x850
		CM8420B						
	重機 JUKI	LH-3528						
		LH-4128						



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com