

GL-XG8808T-ATG XG(S)-PON Combo OLT

Datasheet


Product overview:

GL-XG8808T-ATG is highly integrated, medium-capacity GPON OLT for operators, ISPs, enterprises and park applications. The product follows the ITU-T G.984/G.988 technical standard, The communication industry standard of the People's Republic of China "Access Network Technical Requirements - Gigabit Passive Optical Network (GPON)" and China Telecom's GPON equipment technical requirements CTC2.0 standard, can be compatible with G/XG/XGS three modes at the same time. Among them, the asymmetric system (2.5Gbps uplink, 10Gbps downlink) is called XGPON, and the symmetrical system (10Gbps uplink, 10Gbps downlink) is called XGSPON. The product has good openness, strong compatibility, high reliability, complete software functions, and cooperates with the optical network unit (ONU) to provide users with access to various integrated services such as broadband, voice, video, and monitoring. It can be widely used in the construction of access networks such as operator FTTH/C access, VPN, government and enterprise park access, campus network access, etc., to meet the rapidly growing business needs. XG(S)-PON OLT provides higher bandwidth, application scenarios, business configuration and operation and maintenance are fully synchronized and inherited from GPON.


GL-XG8808T-ATG OLT is only 1U in height, easy to install and maintain, and saves space. The equipment adopts the industry's advanced technology to provide

customers with reliable solutions, with efficient bandwidth utilization and Ethernet service support capabilities, helping operators to provide users with reliable service quality. Supporting mixed networking of different types of ONUs can save a lot of costs for operators.

GL-XG8808T-ATG XG(S)-PON Combo OLT

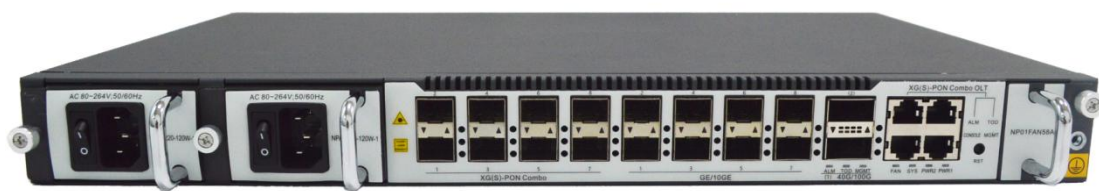

The XG-PON system usually consists of OLT at the office side, ONU and ODN at the user side, and adopts a point-to-multipoint network structure. ODN is composed of passive optical components such as single-mode optical fibers, optical splitters, and optical connectors, and provides optical transmission media for the physical connection between OLT and ONU.

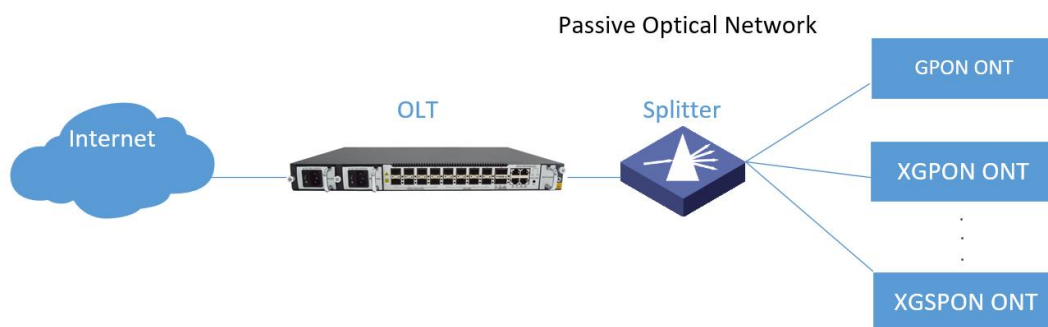

Main Feature

Main Feature

- PON port supports COMBO mode, and can support GPON/XGPON/XGSPON three modes at the same time
- Rich Layer 2/3 switching features and Flexible management methods
- Support multiple link redundancy protocols such as FlexLink/STP/RSTP/MSTP/ERPS/LACP
- Support RIP、 OSPF、 BGP、 ISIS
- Safe DDOS and virus attack protection
- Support redundant backup of power supply, support pluggable power supply, support pluggable fan

Support power failure alarm

Product specifications

Attributes	XG(S)-PON Combo OLT
Exchange capacity	720Gbps
Packet forwarding rate	535.68Mpps
Memory and storage	memory: 2GB, storage: 8GB
Management port	1* Console
Fixed port	8*XG(S)-PON/GPON port, 8*10GE/GE SFP + 2*100G QSFP28

PON	<p>Comply with ITU-T G.987/G.988 standard;</p> <p>Center wavelength: downlink 1577nm, uplink 1270nm;</p> <p>Line rate: XGPON downlink 9.95328Gbps, uplink 2.48832Gbps;</p> <p style="padding-left: 40px;">XGSPON downlink 9.95328Gbps, uplink 9.95328Gbps;</p> <p>Maximum distance: 100KM logical distance, 40KM physical distance, maximum differential distance 40KM;</p> <p>1:256 maximum splitting ratio</p> <p>Standard OMCI management functions</p> <p>Flexible and compatible with any brand of ONT</p> <p>ONU batch software upgrade</p>
VLAN	<p>Support 4K VLAN</p> <p>Support Vlan based on port, MAC and protocol</p> <p>Support dual Tag VLAN, port-based static QinQ and flexible QinQ</p>
MAC	<p>Support 128K MAC address entries</p> <p>Support static MAC address setting</p> <p>Support black hole MAC address filtering function</p> <p>Support port MAC address limit</p>
Layer 2 Ring Network Protocol	<p>Support STP/RSTP/MSTP</p> <p>Support ERPS Ethernet ring network protection protocol</p> <p>Support Loopback-detection port loopback detection</p>
port control	<p>Support two-way bandwidth control</p> <p>Support port storm suppression</p> <p>Support 9K Jumbo ultra-long frame forwarding</p>
Port aggregation	<p>Support static link aggregation</p> <p>Support dynamic LACP</p> <p>Each aggregation group supports a maximum of 8 ports</p>
Mirroring	<p>Support port mirroring</p> <p>Support stream mirroring</p>
ACL	<p>Support standard and extended ACL</p> <p>Support ACL policy based on time period</p> <p>Provide flow classification and flow definition based on IP header information such as source/destination MAC address, VLAN, 802.1p, ToS, DSCP, source/destination IP address, L4 port number, protocol type, etc.</p>

QoS	<p>Support flow rate limiting function based on custom business flow</p> <p>Supports mirroring and redirection functions based on custom business flows</p> <p>Support priority marking based on custom service flow, support 802.1P, DSCP priority Remark capability Support port-based priority scheduling function, support queue scheduling algorithms such as SP/WRR/SP+WRR</p>
Safety	<p>Support user hierarchical management and password protection</p> <p>Support IEEE 802.1X authentication/centralized MAC address authentication</p> <p>Support Radius&TACACS+ authentication</p> <p>Support MAC address learning number limit, support black hole MAC function</p> <p>Support SSH 2.0, providing a secure encrypted channel for user login</p> <p>Support SNMP v3 encrypted management</p> <p>Support port isolation, hardware isolation of packets between ports</p> <p>Support broadcast packet rate suppression</p> <p>Support IP Source Guard to automatically create IP+MAC+port+VLAN binding table, and support manual binding table items</p> <p>Support DHCP Option82 and PPPoE+</p> <p>Support ARP flood attack automatic suppression and ARP spoofing protection</p> <p>Support the prevention of various DOS attacks and virus attacks against the CPU on the control layer</p>
Layer 3	<p>Support ARP learning and aging</p> <p>Support for creating VLAN Layer 3 interfaces and configuring static IPv4/IPv6 addresses</p> <p>Support static route configuration</p> <p>Support RIP/OSPF protocol function</p> <p>Support VRRP protocol function</p>
System management	<p>Support Console/Telnet/SSH2.0 command line configuration</p> <p>Support WEB browser configuration management</p> <p>Support FTP, TFTP file upload and download management</p> <p>Support SNMP V1/V2/V3</p> <p>RMON support</p> <p>Support SNTP clock</p> <p>Support system work log</p> <p>Support LLDP Neighbor Discovery Protocol</p> <p>Support 802.3ah Ethernet OAM</p> <p>Support RFC 3164 Syslog function</p> <p>Support Ping and Traceroute</p>

Environment temperature	Working Temperature: -10°C ~ 55°C Storage temperature: -40°C ~ 70°C
environment humidity	Operating humidity: 10% ~ 95% (non-condensing) Storage humidity: 10% ~ 95% (non-condensing)
environment friendly	China RoHs,、 EEE
Weight	6.5KG
fan	Hot-swappable, adjustable speed (3 ↑)
power	AC: 100 ~ 240V 47/63Hz; DC: 36V ~ 75V;
Power consumption	90W
size	440*270*44mm

Purchasing Information

Product name	Product description
GL-XG8808T-ATG	8*XG(S)-PON/GPON port, 8*10GE/GE SFP + 2*100G QSFP28, Dual power pluggable