


LEAD SCREW

SCREWTECH BROCHURE

RW 润微[®]

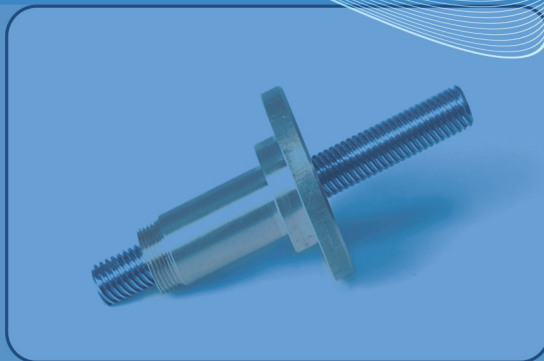

- Professional equipments
- Professional teams
- Professional solutions



ABOUT US

Suzhou runwei precision machinery manufacturing co. LTD.

With more than 10 years of manufacturing experience in Lead Screw, Provide competitive, safe and reliable products, solutions and services in mechanical automation, and continuously create value for customers.

What we're after

High quality and Specialized technical ability. Rapid and professional solution to customer needs is the first goal we pursue, not just the precision and quality of the product.

Actively promoting innovation

Promote technological innovation to lead the industry. Promote process innovation. Focus on expanding automation and simplifying the process, to shorten the lead time and promote management process innovation. Promote production procedures, systematic management, to create real cost-performance value.

Customer satisfaction

Customer satisfaction is the foundation of a company. From the abundant standard specifications, we can quickly select products that meet customers' requirements. Streamline production, and send them to customers with quality and quantity guaranteed at the first time.

MAIN PRODUCTS



CONTENT



01

Technical Data Of Lead Screw 04

Materials and thread forming	05
Advantages of thread formings	05
Ordering code structure	06

02

Thread Specifications 07

Trapezodal Thread	07
Acme Thread	12
Metric Thread	14

03

Trapezodal thread 16

Nut ordering code structure	16
-----------------------------------	----

Common nut	17
------------------	----

COM4 series	17
CHT4 series	18
CNN series	19
WNM6/CHT6 series	20
COT4/CHT2/CHT4/CXT4 series	21
COT4/COM4/COU4/HNM6 series	22
WNM4 series	23

Anti-backlash nut ordering code structure	24
---	----

Anti-backlash nut	25
-------------------------	----

WCOT4/WCHT2 series	25
WCOT4/WCHT2/VCOT2 series	26
WCHT4/WCYT3 series	27
ECOT4/ECHT2 series	28
ECHT4 series	29
ECYT3 series	30
KCHT4 series	31

04

Materials 32

05

Other technical data 34

Thread types




- T ISO Trapezoidal Thread Din103**
 For transmission and position adjustment, widely used in the mechanical industry.
- H High-helix Screws**
 A high-helix leadscrew, speedy multi-start lead screw, or steep lead screw features a high pitch that is used to transform a smaller radial movement into a large axial movement.
- M ISO Metric Thread (60°)**
 The most common form of thread used for fastening and precision transmission.
- A ACME Thread (29°)**
 Inch threads can also be used for fastening connections, but not for high accuracy.
- R Knuckle Thread**
 With the same arc thread as ball screw, the transmission is smoother.
- G Gothic thread**
 Gothic double arc thread, offering the advantages of ball screw, is similar a new kind of lead screw.
- X Self-reversing thread**
 A screw that makes the slide block reciprocate without changing the rotation direction of the spindle.

Materials and thread forming

Process	Regular grade				Precision grade
	Rolling	Cutting	Whirling	Grinding	
Precision	6-10 levels	7-10 levels	6-10 levels	5-7 levels	
Material	SS303,SS304, SS316,S45C, SS440C,40Cr	SS303,SS304, SS316	S45C,SS440C, 40Cr	SS303,SS304, SS316	S45C,SS440C, 40Cr
Heat treatment	-	-	Quenched and tempered	-	Quenched and tempered
Surface treatment	Zinc-plated, Nickel plated, Hard chromium plated, Fluorine coated, Tungsten disulfide, Black Chrome plated				Hard chromium plated, Fluorine coated, Tungsten disulfide, Black Chrome plated
Roughness	0.8-3.2	0.8-3.2	1.6-3.2	0.8-3.2	

	S45C	SS304	SS440	GCr15	Aluminum alloy and Copper alloy
Rolling	○	○	○	×	○
Turning	○	○	○	×	○
Milling	○	○	○	○	○
Grinding	○	○	○	○	×

Features of thread forming ways

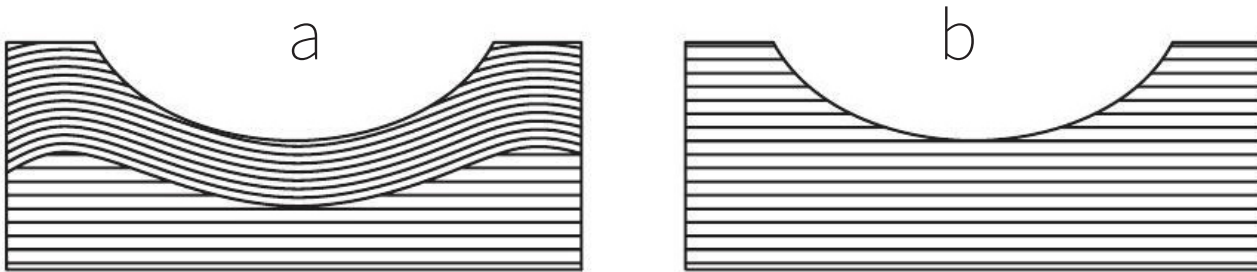

Rolling process

The milling,cutting and grinding process

- Thread cutting**
 It is a traditional way of thread forming.Threads are cut with the (CNC)lathe for accuracy and for versatility. Both inch and metric screw threads can be cut using the (CNC) lathe. Compared to thread rolling, cutting process is used when full thread depth is required, when the quantity is small, when the blank is not very accurate, when threading up to a shoulder is required, when threading a tapered thread, or when the material is brittle.
- Thread grinding**
 Thread grinding is done on a grinding machine using specially dressed grinding wheels matching the shape of the threads. The process is usually used to produce accurate threads or threads in hardened materials;
- Thread rolling**
 The cold working that threads receive during the rolling process strengthens them in tension, shear and fatigue. A Rolled Thread will increase the thread strength by a minimum of 30% verses a cut thread.

Lead screw ordering code structure

T 6 x 2 (P1) RL - 171 - 236 - S1(TF) -D

①

②

③

④

⑤

⑥

⑦


⑧

⑨

⑩

No	On behalf of the name	Labelling	Meaning	Labelling	Meaning
①	Thread type	T	Trapezoidal Thread	R	Round Thread
		M	Metric Thread	G	Gothic thread
		A	ACME Thread	X	Reciprocating thread
②	Nominal diameter	Figure	Diameter		
③	Lead	Figure	Lead		
④	Pitch	Figure	Pitch(Single thread is not marked)		
⑤	Direction of Thread	R	Right hand(not marked)	RL	Left hand and Right hand
		L	Left hand		
⑥	Length of thread	Figure	Length of thread		
⑦	Length of screw	Figure	Length of total screw shaft		
⑧	Material of screw shaft	S1	SS304	U1	45 steel
		S2	SS316	U2	40Cr
		S3	SS316L	U3	20 steel
		S4	SS440C	U4	A3
		G1	GCR15	Ti	Titanium alloy
⑨ *	Surface treatment	NI	Nickel plated	BR	Low temperature black chrome plating
		TF	Teflon	ZN	Galvanized
		CR	Chrome	BL	Blackening
		WS	Tungsten Disulfide	PP	Phosphating treatment
⑩ *	End journal	D	With big end journal	G	With gears
		L	With inner hexagon hole	W	With external spline
		N	With internal spline hole	Z	Other special processing
Note: "*" represents optional items.					

Metric trapezoidal thread specifications(DIN103)

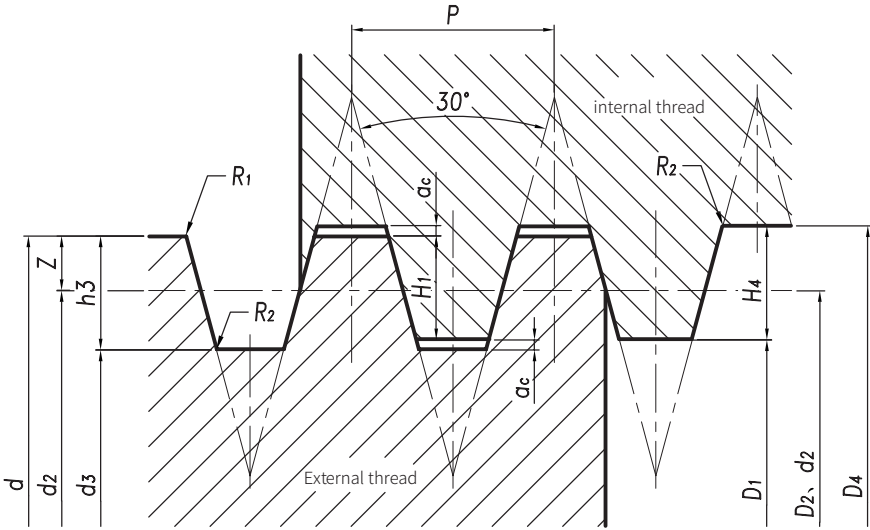

Nominal Diameter (mm)	Lead (mm)	Pitch (mm)	Starts	Thread height (mm)	d1 (mm)		d2 (mm)		d3 (mm)		Direction of thread
					max	min	max	min	max	min	
2	0.5	0.5	1	0.27	2.00	1.93	1.69	1.58	1.50	1.30	LH/RH
3	0.5	0.5	1	0.27	3.00	2.93	2.69	2.57	2.50	2.29	LH/RH
	1	1	1	0.65	3.00	2.89	2.44	2.28	2.00	1.74	LH/RH
	3	1	3	0.65	3.00	2.89	2.44	2.24	2.00	1.74	LH/RH
3.5	0.3	0.3	1	0.16	3.50	3.45	3.30	3.20	3.20	3.02	LH/RH
	0.61	0.61	1	0.32	3.50	3.42	3.14	3.00	2.89	2.67	LH/RH
	0.8	0.8	1	0.45	3.50	3.40	3.04	2.89	2.70	2.45	LH/RH
	1	1	1	0.65	3.50	3.39	2.94	2.78	2.50	2.24	LH/RH
	2	1	2	0.65	3.50	3.39	2.94	2.76	2.50	2.24	LH/RH
	1.22	1.22	1	0.76	3.50	3.37	2.83	2.65	2.28	2.00	LH/RH
4	1	1	1	0.65	4.00	3.89	3.44	3.27	3.00	2.73	LH/RH
	2	1	2	0.65	4.00	3.89	3.44	3.25	3.00	2.73	LH/RH
	4	1	4	0.65	4.00	3.89	3.44	3.21	3.00	2.73	LH/RH
	0.61	0.61	1	0.32	4.50	4.42	4.14	4.00	3.89	3.66	LH/RH
4.5	0.8	0.8	1	0.45	4.50	4.40	4.04	3.89	3.70	3.45	LH/RH
	1	1	1	0.65	4.50	4.39	3.94	3.77	3.50	3.23	LH/RH
	1	1	1	0.65	4.50	4.39	3.94	3.77	3.50	3.23	LH/RH
5	0.5	0.5	1	0.27	5.00	4.93	4.69	4.57	4.50	4.29	LH/RH
	1	1	1	0.65	5.00	4.89	4.44	4.27	4.00	3.73	LH/RH
	2	1	2	0.65	5.00	4.89	4.44	4.25	4.00	3.73	LH/RH
	4	1	4	0.65	5.00	4.89	4.44	4.20	4.00	3.73	LH/RH
	5	1.25	4	0.78	5.00	4.87	4.31	4.05	3.75	3.46	LH/RH
	10	2.5w	4	1.50	5.00	4.79	3.67	3.33	2.50	2.12	LH/RH
	15	2.5	6	1.30	5.00	4.79	3.67	3.28	2.50	2.12	LH/RH
6	1	1	1	0.65	6.00	5.89	5.44	5.27	5.00	4.72	LH/RH
	1.5	1.5	1	0.90	6.00	5.85	5.18	4.98	4.50	4.18	LH/RH
	2	2	1	1.15	6.00	5.82	4.93	4.70	4.00	3.64	LH/RH
	3	1.5	2	0.90	6.00	5.85	5.18	4.96	4.50	4.18	LH/RH
	4	2	2	1.25	6.00	5.82	4.93	4.67	4.00	3.64	LH/RH
	5	2.5	2	1.50	6.00	5.79	4.67	4.39	3.50	3.11	LH/RH
	6	1.5	4	0.90	6.00	5.85	5.18	4.90	4.50	4.18	LH/RH
	9	2.25	4	1.38	6.00	5.81	4.80	4.47	3.75	3.38	LH/RH
	10	2.5	4	1.50	6.00	5.79	4.67	4.32	3.50	3.11	LH/RH
	12	3	4	2.00	6.00	5.77	4.42	4.04	3.00	2.58	LH/RH
6.5	3	1.5	2	0.90	6.50	6.35	5.68	5.45	5.00	4.68	LH/RH
7	3	1.5	2	0.90	7.00	6.85	6.18	5.95	5.50	5.18	LH/RH
The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.											

■ Metric trapezoidal thread specifications(DIN103)

Nominal Diameter (mm)	Lead (mm)	Pitch (mm)	Starts	Thread height (mm)	d1 (mm)		d2 (mm)		d3 (mm)		Direction of thread
					max	min	max	min	max	min	
8	1	1	1	0.65	8.00	7.89	7.44	7.26	7.00	6.72	LH/RH
	1.5	1.5	1	0.90	8.00	7.85	7.18	6.97	6.50	6.17	LH/RH
	2	2	1	1.25	8.00	7.82	6.93	6.69	6.00	5.64	LH/RH
	3	1.5	2	0.90	8.00	7.85	7.18	6.95	6.50	6.17	LH/RH
	4	2	2	1.25	8.00	7.82	6.93	6.67	6.00	5.64	LH/RH
	6	1.5	4	0.90	8.00	7.85	7.18	6.89	6.50	6.17	LH/RH
	8	2	4	1.25	8.00	7.82	6.93	6.60	6.00	5.64	LH/RH
	10	2.5	4	1.50	8.00	7.79	6.67	6.31	5.50	5.10	LH/RH
	12	3	4	1.75	8.00	7.77	6.42	6.03	5.00	4.57	LH/RH
	14	2	7	1.25	8.00	7.82	6.93	6.55	6.00	5.64	LH/RH
	15	2.5	6	1.50	8.00	7.79	6.67	6.26	5.50	5.10	LH/RH
	16	2	8	1.25	8.00	7.82	6.93	6.55	6.00	5.64	LH/RH
	20	2.5	8	1.50	8.00	7.79	6.67	6.26	5.50	5.10	LH/RH
	30	1.25	24	0.78	8.00	7.87	7.31	7.00	6.75	6.44	LH/RH
9	4.5	1.5	3	0.90	9.00	8.85	8.18	7.92	7.50	7.17	LH/RH
	17.5	2.5	7	1.50	9.00	8.79	7.67	7.26	6.50	6.10	LH/RH
10	1	1	1	0.65	10.00	9.89	9.44	9.26	9.00	8.71	LH/RH
	1.5	1.5	1	0.90	10.00	9.85	9.18	8.97	8.50	8.17	LH/RH
	2	2	1	1.25	10.00	9.82	8.93	8.69	8.00	7.63	LH/RH
	3	3	1	1.75	10.00	9.77	8.42	8.14	7.00	6.57	LH/RH
	3	1.5	2	0.90	10.00	9.85	9.18	8.94	8.50	8.17	LH/RH
	4	2	2	1.25	10.00	9.82	8.93	8.66	8.00	7.63	LH/RH
	5	2.5	2	1.50	10.00	9.79	8.67	8.38	7.50	7.10	LH/RH
	6	2	3	1.25	10.00	9.82	8.93	8.63	8.00	7.63	LH/RH
	8	2	4	1.25	10.00	9.82	8.93	8.59	8.00	7.63	LH/RH
	10	2.5	4	1.50	10.00	9.79	8.67	8.31	7.50	7.10	LH/RH
	10	2	5	1.25	10.00	9.82	8.93	8.55	8.00	7.63	LH/RH
	12	3	4	1.75	10.00	9.87	8.42	8.02	7.00	6.57	LH/RH
	14	2	7	1.25	10.00	9.82	8.93	8.55	8.00	7.63	LH/RH
	15	3	5	1.75	10.00	9.77	8.42	7.97	7.00	6.57	LH/RH
	16	2	8	1.25	10.00	9.82	8.93	8.55	8.00	7.63	LH/RH
	20	3.33	6	1.90	10.00	9.75	8.25	7.78	6.67	6.22	LH/RH
	25	5	5	1.50	10.00	9.67	7.39	6.84	5.00	4.46	LH/RH
	35	1.25	28	0.78	10.00	9.87	9.31	8.99	8.75	8.44	LH/RH
The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.											

■ Metric trapezoidal thread specifications(DIN103)

Nominal Diameter (mm)	Lead (mm)	Pitch (mm)	Starts	Thread height (mm)	d1 (mm)		d2 (mm)		d3 (mm)		Direction of thread
					max	min	max	min	max	min	
12	2	2	1	1.25	12.00	11.82	10.93	10.68	10.00	9.62	LH/RH
	2.5	2.5	1	1.50	12.00	11.79	10.67	10.41	9.50	9.09	LH/RH
	3	3	1	1.75	12.00	11.77	10.42	10.13	9.00	8.56	LH/RH
	4	2	2	1.25	12.00	11.82	10.93	10.66	10.00	9.62	LH/RH
	5	2.5	2	1.50	12.00	11.79	10.67	10.37	9.50	9.09	LH/RH
	6	3	2	1.75	12.00	11.77	10.42	10.10	9.00	8.56	LH/RH
	8	2	4	1.25	12.00	11.82	10.93	10.59	10.00	9.62	LH/RH
	9	3	3	1.75	12.00	11.77	10.42	10.06	9.00	8.56	LH/RH
	10	2.5	4	1.50	12.00	11.79	10.67	10.30	9.50	9.09	LH/RH
	12	2	6	1.25	12.00	11.82	10.93	10.54	10.00	9.63	LH/RH
	15	3	5	1.75	12.00	11.77	10.42	9.96	9.00	8.56	LH/RH
	15	2.5	6	1.50	12.00	11.79	10.67	10.25	9.50	9.09	LH/RH
	16	3.2	5	1.85	12.00	11.76	10.32	9.85	8.80	8.35	LH/RH
	18	3	6	1.75	12.00	11.77	10.42	9.96	9.00	8.56	LH/RH
	21	4.2	5	2.35	12.00	11.69	9.80	9.28	7.80	7.29	LH/RH
	24	4	6	2.25	12.00	11.72	9.91	9.39	8.00	7.50	LH/RH
14	2	2	1	1.25	14.00	13.82	12.93	12.68	12.00	11.62	LH/RH
	3	3	1	1.75	14.00	13.77	12.42	12.13	11.00	10.55	LH/RH
	4	4	1	2.25	14.00	13.72	11.91	11.58	10.00	9.50	LH/RH
	6	3	2	1.75	14.00	13.77	12.42	12.09	11.00	10.55	LH/RH
	8	4	2	2.25	14.00	13.72	11.91	11.54	10.00	9.50	LH/RH
	10	2.5	4	1.50	14.00	13.79	12.67	12.29	11.50	11.08	LH/RH
	12	4	3	2.25	14.00	13.72	11.91	11.50	10.00	9.50	LH/RH
	16	4	4	2.25	14.00	13.72	11.91	11.86	10.00	9.50	LH/RH
	18	3	6	1.75	14.00	13.77	12.42	11.95	11.00	10.55	LH/RH
	28	4	7	2.25	14.00	13.72	11.91	11.38	10.00	9.50	LH/RH
	30	5	6	2.75	14.00	13.67	11.39	10.82	9.00	8.45	LH/RH
16	2	2	1	1.25	16.00	15.82	14.93	14.68	14.00	13.61	LH/RH
	3	3	1	1.75	16.00	15.77	14.42	14.12	13.00	12.55	LH/RH
	4	4	1	2.25	16.00	15.72	13.91	13.57	12.00	11.49	LH/RH
	5	2.5	2	1.50	16.00	15.79	14.67	14.37	13.50	13.08	LH/RH
	8	4	2	2.25	16.00	15.72	13.91	13.53	12.00	11.49	LH/RH
	9	4.5	2	2.50	16.00	15.69	13.65	13.26	11.50	10.97	LH/RH
	10	2	5	1.25	16.00	15.82	14.93	14.53	14.00	13.62	LH/RH
The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.											

Metric trapezoidal thread specifications(DIN103)

Nominal Diameter (mm)	Lead (mm)	Pitch (mm)	Starts	Thread height (mm)	d1 (mm)		d2 (mm)		d3 (mm)		Direction of thread
					max	min	max	min	max	min	
16	16	4	4	2.25	16.00	15.72	13.91	13.44	12.00	11.49	LH/RH
	21	3	7	1.75	16.00	15.77	14.42	13.95	13.00	12.55	LH/RH
	25	5	5	2.25	16.00	15.67	13.39	12.82	11.00	10.44	LH/RH
	35	5	7	2.75	16.00	15.67	13.39	12.82	11.00	10.44	LH/RH
18	2	2	1	1.25	18.00	17.82	16.93	16.67	16.00	15.61	LH/RH
	4	4	1	2.25	18.00	17.72	15.91	15.57	14.00	13.49	LH/RH
	8	4	2	2.25	18.00	17.72	15.91	15.53	14.00	13.49	LH/RH
	16	4	4	2.25	18.00	17.72	15.91	15.44	14.00	13.49	LH/RH
	18	4.5	4	2.50	18.00	17.69	15.65	15.16	13.50	12.96	LH/RH
	24	3	8	1.75	18.00	17.77	16.42	15.94	15.00	14.54	LH/RH
	25	2.5	10	1.50	18.00	17.79	16.67	16.23	15.50	15.08	LH/RH
	40	5	8	2.75	18.00	17.67	15.39	14.81	13.00	12.44	LH/RH
20	60	5	12	2.75	18.00	17.67	15.39	14.81	13.00	12.44	LH/RH
	2	2	1	1.25	20.00	19.82	18.93	18.67	18.00	17.61	LH/RH
	4	4	1	2.25	20.00	19.72	17.91	17.57	16.00	15.48	LH/RH
	8	4	2	2.25	20.00	19.72	17.91	17.53	16.00	15.48	LH/RH
	10	5	2	2.75	20.00	19.67	17.39	16.98	15.00	14.43	LH/RH
	12	3	4	1.75	20.00	19.77	18.42	18.00	17.00	16.54	LH/RH
	16	4	4	2.25	20.00	19.72	17.91	17.43	16.00	15.48	LH/RH
	17.5	2.5	7	1.50	20.00	19.79	18.67	18.22	17.50	17.07	LH/RH
	18	6	3	3.50	20.00	19.63	16.88	16.39	14.00	13.39	LH/RH
	20	4	5	2.25	20.00	19.72	17.91	17.36	16.00	15.48	LH/RH
	40	5	8	2.75	20.00	19.67	17.39	16.80	15.00	14.43	LH/RH
	45	5	9	2.75	20.00	19.67	17.39	16.80	15.00	14.43	LH/RH
	80	5	16	2.75	20.00	19.67	17.39	16.80	15.00	14.43	LH/RH
	3	3	1	1.75	22.00	21.77	20.42	20.11	19.00	18.54	LH/RH
	4	4	1	2.25	22.00	21.72	19.91	19.56	18.00	17.48	LH/RH
	5	5	1	2.75	22.00	21.67	19.39	19.02	17.00	16.43	LH/RH
22	6	2	3	1.25	22.00	21.82	20.93	20.60	20.00	19.60	LH/RH
	8	4	2	2.25	22.00	21.72	19.91	19.52	18.00	17.48	LH/RH
	10	5	2	2.75	22.00	21.67	19.39	18.98	17.00	16.43	LH/RH
	10	2.5	4	1.50	22.00	21.79	20.67	20.28	19.50	19.07	LH/RH
	16	4	4	2.25	22.00	21.72	19.91	19.43	18.00	17.48	LH/RH
	18	3	6	1.75	22.00	21.77	20.42	19.93	19.00	18.54	LH/RH
	20	4	5	2.25	22.00	21.72	19.91	19.36	18.00	17.48	LH/RH
	24	4	6	2.25	22.00	21.72	19.91	19.36	18.00	17.48	LH/RH
	The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.										

Metric trapezoidal thread specifications(DIN103)

Nominal Diameter (mm)	Lead (mm)	Pitch (mm)	Starts	Thread height (mm)	d1 (mm)		d2 (mm)		d3 (mm)		Direction of thread
					max	min	max	min	max	min	
22	50	5	10	2.75	22.00	21.67	19.39	18.80	17.00	16.43	LH/RH
24	3	3	1	1.75	24.00	23.77	22.42	22.11	21.00	20.53	LH/RH
	4	4	1	2.25	24.00	23.72	21.91	21.56	20.00	19.48	LH/RH
	5	5	1	2.75	24.00	23.67	21.39	21.02	19.00	18.42	LH/RH
	10	5	2	2.75	24.00	23.67	21.39	20.97	19.00	18.42	LH/RH
	40	5	8	2.75	24.00	23.67	21.39	20.79	19.00	18.42	LH/RH
25	55	5	11	2.75	24.00	23.67	21.39	20.79	19.00	18.42	LH/RH
	5	5	1	2.75	25.00	24.67	22.39	22.02	20.00	19.42	LH/RH
	10	5	2	2.75	25.00	24.67	22.39	21.97	20.00	19.42	LH/RH
	12	6	2	3.50	25.00	24.63	21.88	21.43	19.00	18.38	LH/RH
	20	4	5	2.25	25.00	24.72	22.91	22.35	21.00	20.47	LH/RH
26	25	5	5	2.75	25.00	24.67	22.39	21.79	20.00	19.42	LH/RH
	60	5	12	2.75	25.00	24.67	22.39	21.79	20.00	19.42	LH/RH
	3	3	1	1.75	26.00	25.77	24.42	24.11	23.00	22.53	LH/RH
	5	5	1	2.75	26.00	25.67	23.39	23.01	21.00	20.42	LH/RH
	8	8	1	4.50	26.00	25.55	21.87	21.41	18.00	17.29	LH/RH
	8	4	2	2.25	26.00	25.72	23.91	23.52	22.00	21.47	LH/RH
	10	5	2	2.75	26.00	25.67	23.39	22.97	21.00	20.42	LH/RH
	12	3	4	1.75	26.00	25.77	24.42	23.98	23.00	22.53	LH/RH
	12	4	3	2.25	26.00	25.72	23.91	23.47	22.00	21.47	LH/RH
	16	4	4	2.25	26.00	25.72	23.91	23.42	22.00	21.47	LH/RH
28	20	4	5	2.25	26.00	25.72	23.91	23.35	22.00	21.47	LH/RH
	24	4	6	2.25	26.00	25.72	23.91	23.35	22.00	21.47	LH/RH
	50	5	10	2.75	26.00	25.67	23.39	22.79	21.00	20.42	LH/RH
	60	5	12	2.75	26.00	25.67	23.39	22.79	21.00	20.42	LH/RH
	75	5	15	2.75	26.00	25.67	23.39	22.79	21.00	20.42	LH/RH
	3	3	1	1.75	28.00	27.77	26.42	26.11	25.00	24.53	LH/RH
	5	5	1	2.75	28.00	27.67	25.39	25.01	23.00	22.42	LH/RH
	8	8	1	4.50	28.00	27.55	23.87	23.40	20.00	19.28	LH/RH
	10	5	2	2.75	28.00	27.67	25.39	24.97	23.00	22.42	LH/RH
	The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.										

List of other trapezoidal thread sizes

Nominal diameter	Lead
30	3、6、10、12、28、32、50、70
32	3、5、6、12、20、75
33	15、18
34	16
36	6、12、36、200
38	5
40	7、14、30、40
43	24
44	7、12、14
45	8、20

Nominal diameter	Lead
50	8、12
53	30
55	9、14
60	9、14
70	10、16
80	10、16
90	12、18
100	12、16、20
120	14、16、22

ACME thread list(ANSI/ASME B1.5-1977)

Model	Nominal diameter		lead		pitch		starts	Thread height (mm)	d1(mm)		d2(mm)		d3(mm)		Direction of thread
	in	mm	in	mm	in	mm			max	min	max	min	max	min	
3/16-40	3/16	4.75	0.025	0.635	0.025	0.635	1	0.32	4.75	4.67	4.38	4.24	4.12	3.89	LH/RH
3/16-20	3/16	4.76	0.05	1.27	0.05	1.27	1	0.79	4.76	4.63	4.06	3.88	3.49	3.20	LH/RH
7/32-22	7/32	5.5	0.180	4.58	0.045	1.15	4	0.72	5.50	5.36	4.86	4.61	4.36	4.07	LH/RH
			0.378	9.59	0.045	1.15	8	0.72	5.50	5.36	4.86	4.58	4.36	4.07	LH/RH
7/32-21	7/32	5.56	0.192	4.88	0.048	1.22	4	0.76	5.56	5.43	4.89	4.63	4.34	4.05	LH/RH
			0.384	9.76	0.048	1.22	8	0.76	5.56	5.43	4.89	4.59	4.34	4.05	LH/RH
1/4-32	1/4	6.35	0.031	0.80	0.031	0.80	1	0.55	6.35	6.25	5.89	5.73	5.55	5.29	LH/RH
1/4-16	1/4	6.35	0.063	1.59	0.063	1.59	1	1.04	6.35	6.20	5.49	5.28	4.76	4.43	LH/RH
			0.125	3.18	0.063	1.59	2	1.04	6.35	6.20	5.49	5.26	4.76	4.43	LH/RH
			0.250	6.36	0.063	1.59	4	1.04	6.35	6.20	5.49	5.20	4.76	4.43	LH/RH
1/4-10	1/4	6.35	0.5	12.70	0.1	2.54	5	1.52	6.35	6.14	5.00	4.60	3.81	3.42	LH/RH
5/16-8	5/16	8	0.501	12.72	0.125	3.18	4	1.84	8.00	7.76	6.33	5.93	5.70	5.26	LH/RH
11/32-16	11/32	9	0.188	4.77	0.063	1.59	3	1.04	9.00	8.85	8.14	7.87	7.41	7.08	LH/RH
11/32-16	11/32	9	0.313	7.95	0.063	1.59	5	1.04	9.00	8.85	8.14	7.79	7.41	7.08	LH/RH
3/8-16	3/8	9.5	0.063	1.59	0.063	1.59	1	1.04	9.50	9.35	8.64	8.43	7.92	7.58	LH/RH
3/8-10	3/8	9.5	0.1	2.54	0.1	2.54	1	1.52	9.50	9.29	8.15	7.89	6.96	6.56	LH/RH
			0.2	5.08	0.1	2.54	2	1.52	9.50	9.29	8.15	7.86	6.96	6.56	LH/RH
3/8-19	3/8	9.5	0.314	7.98	0.052	1.33	6	0.82	9.50	9.36	8.77	8.45	8.17	7.85	LH/RH
3/8-10	3/8	9.5	0.492	12.50	0.098	2.50	5	1.50	9.50	9.29	8.17	7.76	7.00	6.60	LH/RH
3/8-8	3/8	9.5	0.501	12.72	0.125	3.18	4	1.84	9.50	9.26	7.83	7.43	6.33	5.88	LH/RH
3/8-5	3/8	9.5	1	25.40	0.2	5.08	5	2.94	9.50	9.17	6.85	6.30	4.42	3.88	LH/RH
The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.															

ACME thread list(ANSI/ASME B1.5-1977)

Model	Nominal diameter		Lead		pitch		Starts	Thread height (mm)	d1(mm)		d2(mm)		d3(mm)		Direction of thread
	in	mm	in	mm	in	mm			max	min	max	min	max	min	
3/8-8	3/8	9.6	0.626	15.90	0.125	3.18	5	1.84	9.60	9.36	7.37	6.91	6.43	5.98	LH/RH
3/8-8	3/8	10	0.751	19.08	0.125	3.18	6	1.84	10.00	9.76	8.33	7.87	6.83	6.38	LH/RH
7/16-8	7/16	11	0.751	19.08	0.125	3.18	6	1.84	11.00	10.76	9.33	8.86	7.83	7.38	LH/RH
7/16-8	7/16	11.3	0.250	6.36	0.125	3.18	2	1.84	11.30	11.06	9.63	9.30	8.13	7.68	LH/RH
			0.876	22.26	0.125	3.18	7	1.84	11.30	11.06	9.63	9.16	8.13	7.68	LH/RH
7/16-10	7/16	11.39	0.886	22.50	0.098	2.50	9	1.50	11.39	11.18	10.06	9.64	8.89	8.48	LH/RH
7/16-10	7/16	11.5	0.1	2.54	0.1	2.54	1	1.52	11.50	11.29	10.15	9.89	8.96	8.55	LH/RH
			0.2	5.08	0.1	2.54	2	1.52	11.50	11.29	10.15	9.85	8.96	8.55	LH/RH
			0.5	12.70	0.1	2.54	5	1.52	11.50	11.29	10.15	9.73	8.96	8.55	LH/RH
7/16-8	7/16	11.5	0.620	15.75	0.124	3.15	5	1.83	11.50	11.26	9.84	9.38	8.35	7.90	LH/RH
15/32-16	15/32	11.9	0.250	6.36	0.063	1.59	4	1.04	11.90	11.75	11.04	10.73	10.31	9.97	LH/RH
			0.376	9.54	0.063	1.59	6	1.04	11.90	11.75	11.04	10.68	10.31	9.97	LH/RH
15/32-16	15/32	11.95	0.125	3.18	0.063	1.59	2	1.04	11.95	11.80	11.09	10.84	10.36	10.02	LH/RH
1/2-10	1/2	12.5	0.1	2.54	0.1	2.54	1	1.52	12.50	12.29	11.15	10.88	9.96	9.55	LH/RH
			0.2	5.08	0.1	2.54	2	1.52	12.50	12.29	11.15	10.85	9.96	9.55	LH/RH
1/2-8	1/2	12.7	0.125	3.18	0.125	3.18	1	1.84	12.70	12.46	11.03	10.73	9.53	9.07	LH/RH
			1.002	25.44	0.125	3.18	8	1.84	12.70	12.46	11.03	10.56	9.53	9.07	LH/RH
1/2-8	1/2	12.8	0.876	22.26	0.125	3.18	7	1.84	12.80	12.56	11.13	10.66	9.63	9.17	LH/RH
			2.559	65.00	0.197	5.00	13	2.75	12.80	12.47	10.19	9.63	7.80	7.25	LH/RH
9/16-8	9/16	14	1.127	28.62	0.125	3.18	9	1.84	14.00	13.76	12.33	11.81	10.83	10.37	LH/RH
9/16-8	9/16	14.5	1.002	25.44	0.125	3.18	8	1.84	14.50	14.26	12.83	12.35	11.33	10.87	LH/RH
19/32-16	19/32	15	0.313	7.95	0.063	1.59	5	1.04	15.00	14.85	14.14	13.78	13.41	13.06	LH/RH
19/32-16	19/32	15	0.438	11.13	0.063	1.59	7	1.04	15.00	14.85	14.14	13.78	13.41	13.06	LH/RH
19/32-5	19/32	15.14	1.575	40.00	0.197	5.00	8	2.75	15.14	14.81	12.53	11.96	10.14	9.58	LH/RH
5/8-8	5/8	15.5	1.252	31.80	0.125	3.18	10	1.84	15.50	15.26	13.83	13.35	12.33	11.87	LH/RH
5/8-5	5/8	15.8	3.150	80.00	0.197	5.00	16	2.75	15.80	15.47	13.19	12.62	10.80	10.24	LH/RH
5/8-8	5/8	16	0.376	9.54	0.125	3.18	3	1.84	16.00	15.76	14.33	13.95	12.83	12.36	LH/RH
5/8-11	5/8	16	0.631	16.03	0.090	2.29	7	1.40	16.00	15.80	14.78	14.36	13.71	12.80	LH/RH
5/8-8	5/8	16	0.868	22.05	0.124	3.15	7	1.83	16.00	15.76	14.34	13.86	12.85	12.39	LH/RH
5/8-8	5/8	16	1.127	28.62	0.125	3.18	9	1.84	16.00	15.76	14.33	13.84	12.83	12.36	LH/RH
5/8-5	5/8	16.72	3.346	85.00	0.197	5.00	17	2.75	16.72	16.39	14.11	13.53	11.72	11.16	LH/RH
11/16-8	11/16	17	1.377	34.98	0.125	3.18	11	1.84	17.00	16.76	15.33	14.84	13.83	13.36	LH/RH
11/16-5	11/16	17.28	1.772	45.00	0.197	5.00	9	2.75	17.28	16.95	14.67	14.09	12.28	11.72	LH/RH
The above data is just for you reference of selection and design.The actual delivery may differ from the above size. If the required thread size is not included in the table,please contact our sales person.															

■ Metric thread(DIN13)

lead diameter	0.25	0.35	0.4	0.45	0.5	0.7	0.75	0.8	1.0	1.25	1.5	2.0
2	⊙		○									
2.5		⊙		○								
3		⊙			○							
4					⊙	○						
5					⊙			○				
6					⊙		⊙		○			
7					⊙		⊙		○			
8					⊙		⊙			○		
9					⊙		⊙				○	
10					⊙		⊙				○	


⊙ Recommended models including metric fine thread
○ Metric coarse thread

■ Bi-directional thread lead screw

■ Overall technical specs of threading ways

The processing technology	Rolling		Cutting		Whirlwind & milling		Grinding
Precision	6-10 levels		7-10 levels		6-10 levels		5-7 levels
Material	SS303,SS304, SS316,45#, SS440C,40Cr		SS303, SS304, SS316	45# SS440C, 40Cr	SS303, SS304, SS316	45#, SS440C, 40Cr	SS303,SS304, SS316,45#, SS440C, 40Cr
Min diameter	4-10mm	12mm	2mm		16mm		4mm
Min pitch	0.3	0.5	0.5		2		0.3
Neutral(relief groove、incomplete thread) min length	20	40	0		0		0
Heat treatment	-		-	Quenched and tempered	-	Quenched and tempered	Quenched and tempered
Surface treatment	Zinc-plated, Nickel plated, Hard chromium plated, Fluorine coated, Tungsten disulfide, Black chorme plated					Hard chromium plated, Fluorine coated, Tungsten Disulfide, Black chorme plated	
Precision grade	5-10 levels		6-10 levels		6-8 levels		5-7 levels
Roughness	0.8-3.2		0.8-3.2		1.6-3.2		0.8-3.2

■ Thread forming process

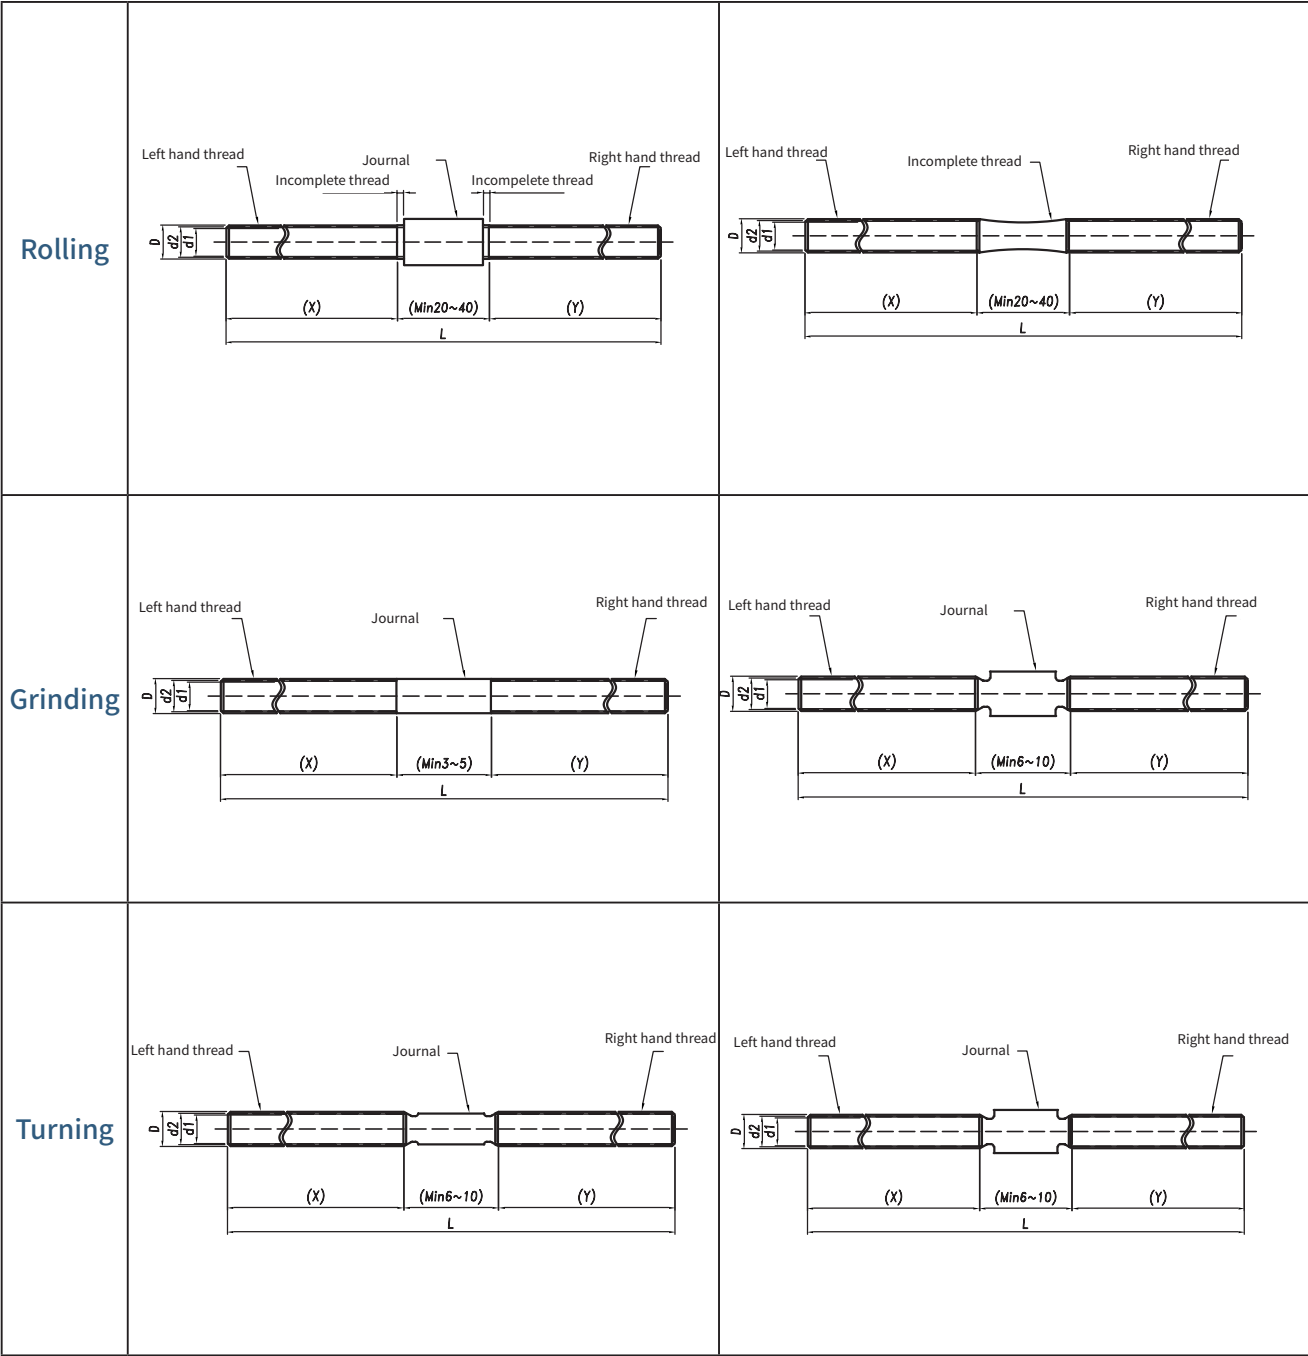


Nut ordering code structure

T6.35x6.35(P1.588)L-SNT4-D14F28L25W20B5H24-P1-Z


No.	On behalf of the name		Labelling	Meaning	Labelling	Meaning
①	Thread		T	Trapezoidal Thread	R	Round Thread
			M	Metric Thread	G	Goethe thread
			A	ACME Thread	X	Reciprocating thread
②	Diameter	Figure		Diameter		
③	Lead	Figure		Lead		
④	Pitch	Figure		Pitch		
⑤	Thread direction		R	Right hand	RL	
			L	Left hand		
⑥	Nut shape		C	Cylindrical	L	Hexagonal
			S	Square	D	Cylindrical + flat
			W	Widen	A	Thread mounting
			H	Heighten	Z	Other shapes
⑦	Shape of the flange		N	Without flange	X	Round flange milling square
			O	Round flange without milling flat	L	Round flange with six milling flats
			H	Round flange with double milling flat	D	Round with a flat
			Y	Triangle	Z	Other shapes
⑧	Connection ways		N	Without mounting holes	M	Threaded hole
			C	Countersunk holes	B	With trunnion
			T	Through holes	Z	Other mounting holes
			U	Waist type holes		
⑨	Mounting hole amount		1-10	No mounting holes is not marked		
⑩	Nut sizes	Round nut	D	Outer Diameter	W	PCD
			F	Flange dia	B	Flange thickness
		Square nut	L	Nut length	H	Flange cutting edge width
			L	Nut length	W	Width
			H	Height	-	-
⑪	Nut material code		B1	Brass	S1	SS304
			B2	Tin bronze	S2	SS316
			B3	Phosphor bronze	S3	SS316L
			B4	Aluminum bronze	S4	SS440c
		P	P1	POM-C	BP(K/N)	Copper + plastic
			P2	POM-H	C	Cast iron、1045
			P3	POM+PTFE	Q	Self lubrication (no oil)
		K	K1	PEEK(100%PEEK)	K3	PEEK(Carbon fiber reinforced)
			K2	PEEK(Glass fiber reinforced)	K4	PEEK(Contains 30% of "carbon fiber + graphite + PTFE")
			N	Nylon	AP	Aluminum alloy + plastic
			J	Lgus J	BC	Copper + steel
⑫ *	Surface treatment		BL	Black	CR	Chrome plated
			NI	Nickel plated	WS	Tungsten disulfide
			TF	Teflon		
⑬ *	Additional mark		A-Z	Standard nut sequence	J	CNC machining
			1-1000	Prevent duplicate Numbers	Z	Injection molding

Note: "*" represents optional items.


Common nut

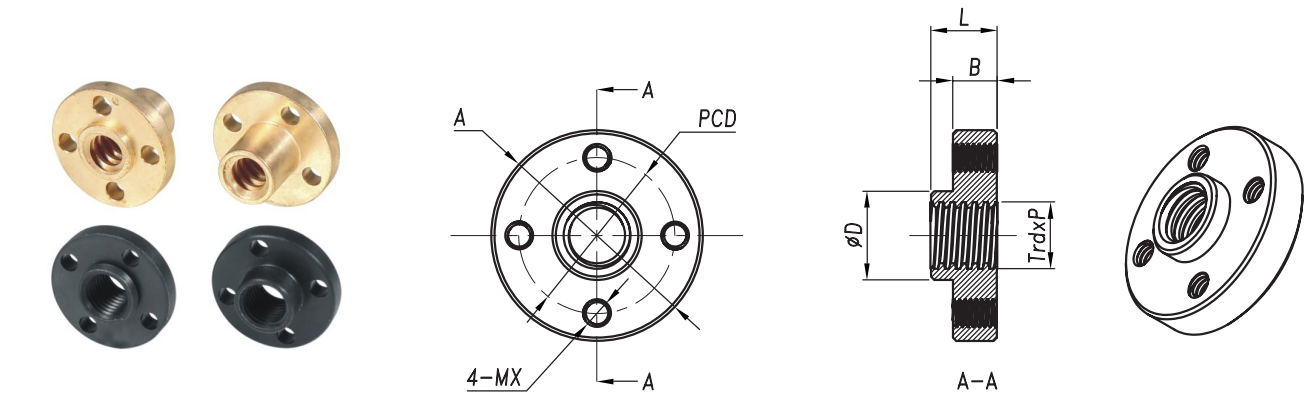

Diameter	Lead	Pitch	Model	Nut outer diameter	The flange diameter	Length of nut	The thickness of the flange	Hole spacing	Aperture	Material	Direction of thread
d	P	Dw	Type	D	F	L	B	PCD	X		
6	1	1	COM4	8	19	8	2.6	14	3.2	consult business personnel for details	RH
							4		M3		RH
	3	1.5					2.6		3.2		RH
							4		M3		RH
	6	1.5					2.6		3.2		RH
							4		M3		RH
8	1	1		10	21	10	3.5	16	3.2		RH
							5		M3		LH/RH
	2	2				12	3.5		3.2		LH/RH
							5		M3		LH/RH
							3.5		3.2		RH
							5		M3		RH
	4	2				12	3.5		3.2		RH
							5		M3		RH
							3.5		3.2		RH
							5		M3		RH
	8	2				12	3.5		3.2		RH
							5		M3		RH
							3.5		3.2		RH
							5		M3		RH
15	2.5	15		3.5	3.2	RH					
				5	M3	RH					
			3.5	3.2	RH						
			5	M3	RH						
20	2.5	15	3.5	3.2	RH						
			5	M3	RH						

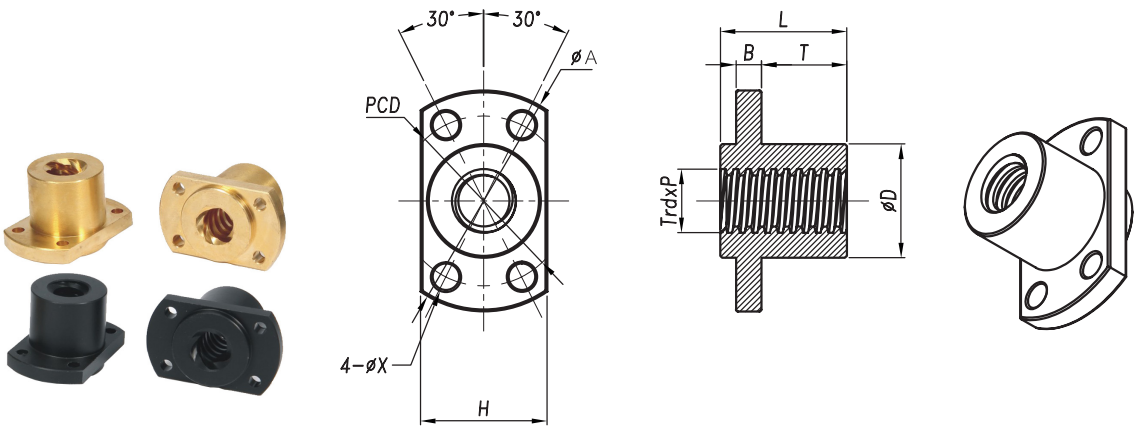


Diameter	Lead	Pitch	Model	Nut diameter	The flange diameter	Length of nut	The thickness of the flange	Hole spacing	Aperture	Material	Direction of thread
d	P	Dw	Type	D	F	L	B	PCD	X		
10	2	2	CHT4	18	35	20	4	24	4.2	Consult business personnel for details	RH
	5	2.5									RH
	10	2									RH
	15	2.5									RH
	20	2.5									RH
12	2	2		22	40	25	4.5	28	4.2		RH
	3	3									LH/RH
	6	3									RH
	12	3									LH/RH
	20	2.5									RH
14	2	2		26	45	28	5	30	4.2		RH
	3	3									RH
	4	4									RH
	6	3									RH
	8	4									RH
	12	3									RH
	20	4									RH
16	3	3		28	48	32	5.5	33	5.2		RH
	4	4									LH/RH
	6	3									RH
	8	4									RH
18	3	3		30	52	36	6	36	5.2		RH
	4	4									RH
20	3	3		32	55	40	8	38	6.2		RH
	4	4									LH/RH
	20	4	RH								
	40	5	RH								

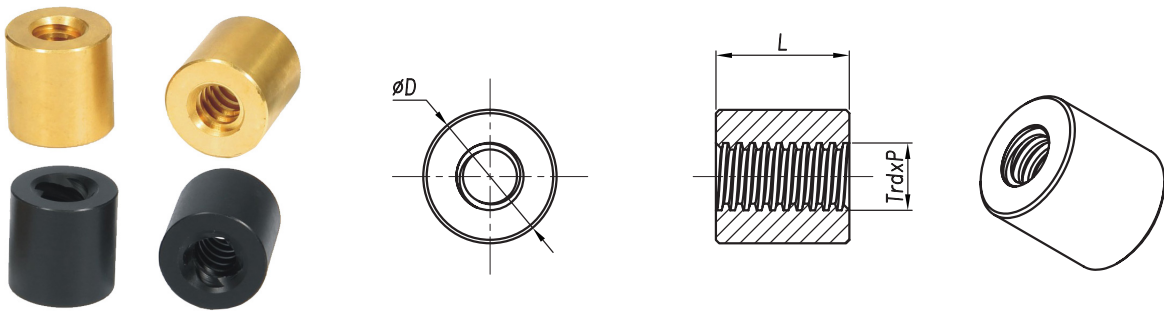


Diameter	Lead	Pitch	Model	Nut diameter	Length of nut	Material	Direction of thread
d	P	Dw	Type	D	L		
10	2	2	CNN	20	20	Consult business personnel for details	RH
	5	2.5					RH
	10	2					RH
	15	2.5					RH
	20	2.5					RH
12	2	2		22	22		RH
	3	3					LH/RH
	6	3					RH
	12	3					LH/RH
	20	2.5					RH
14	2	2		25	25		RH
	3	3					RH
	4	4					RH
	8	4					RH
	12	3					RH
	20	4					RH
16	3	3		28	28		RH
	4	4					LH/RH
	8	4					RH
18	3	3		30	30		RH
	4	4					RH
20	3	3		30	30		RH
	4	4					LH/RH
	20	4					RH
	40	5	RH				


Common nut

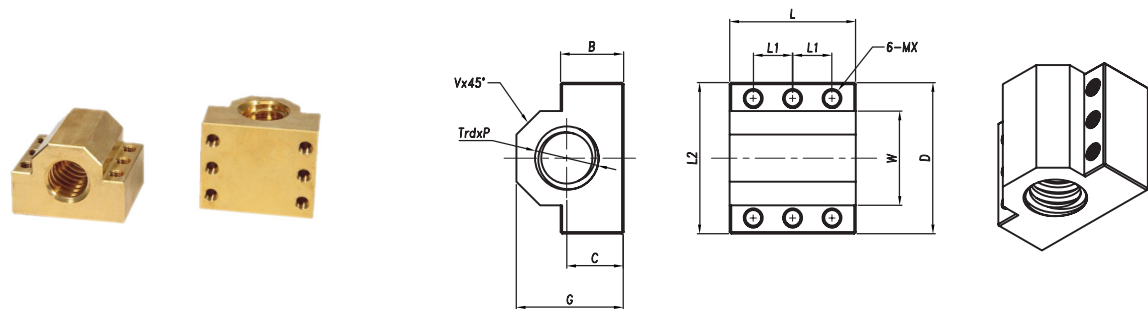

Diameter d	Lead P	Pitch Dw	Model Type	Length of nut L	Hole spacing L1	Material	Direction of thread
20	4	4	WNM6	40	25	consult business personnel for details	LH/RH

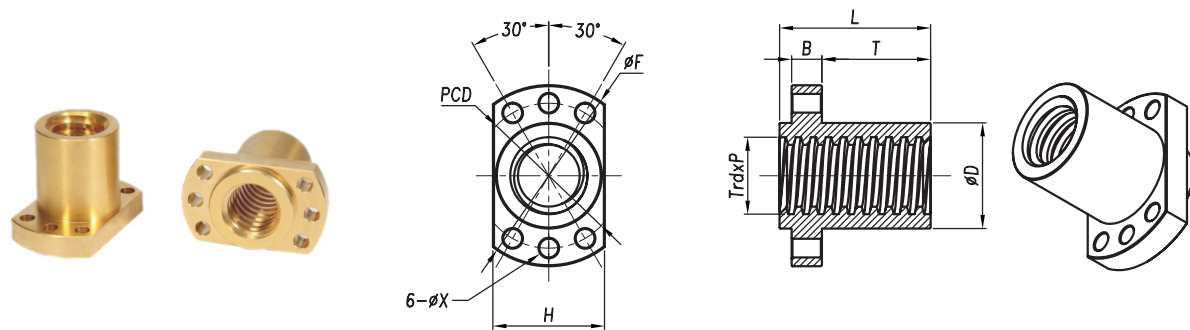


Diameter	Lead	Pitch	Model	Nut diameter	The flange diameter	Length of nut	The thickness of the flange	Hole spacing	Aperture	Material	Direction of thread
d	P	Dw	Type	D	A	L	B	PCD	X		
25	5	5	CHT6	35	60	50	10	48	6.2	consult business personnel for details	RH



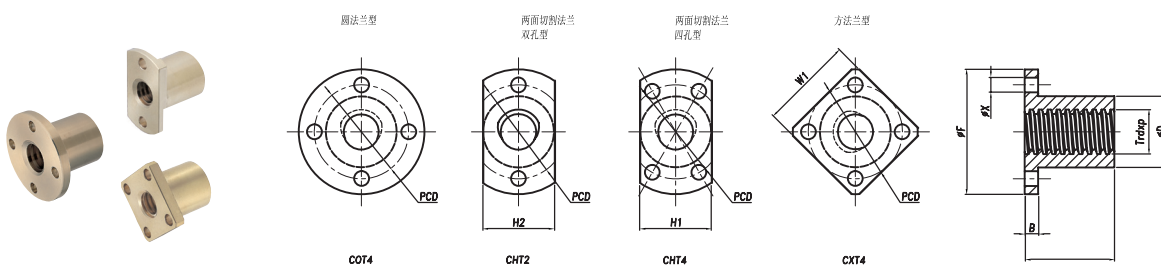


Diameter	Lead P	Nut shape code	D	L1	D1	T	P.C.D	K	W	W1	Dynamic permissible thrust (kN)
8	1.5	COT4 CHT2 CHT4 CXT4	15	20	30	5	22	4.3	-	-	1.47
10	2		20	24	36		26		22	-	2.55
12			3	22	30		44	31	5.4	24	-
14	28			35	51	6	38	6.6	30	38	4.9
16	4		32	40	56		42		34	-	6.67
18			36	50	61		47		42	42	9.81
20	5		44	56	76	8	58	9	48	58	12.36
22											14.22
25											17.95
28	6		52	60	84	10	76	11	62	-	21.08
32											25.78
36											58
40	8		68	80	109	4	24	3.3	-	-	40.31
50											2.02
10	2	COT4 CHT2	16	19	32	4	24	3.3	-	-	2.02
12			18	24	36	5	27	4.3	-	-	3.14
14	20		38		29		-		-	3.92	
16	22		28	40	31		-		-	5.34	
20	4		26	32	44	35	-	-	7.85		
22	5		28	40	50	39	5.4	-	-	9.89	
25			31		53	42		-	-	11.38	
28			34	58	46	6.6	-	-	14.42		
32	6		38	62	50		-	-	16.94		
Nut shape can be customized,please consult business personnel for details.											


Nut shape can be customized, please consult business personnel for details.

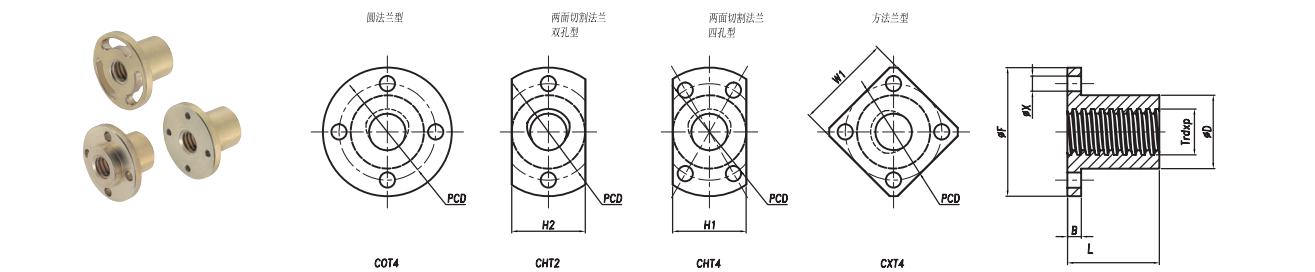

Diameter	Pitch P	Model	D	L	D1		B	L1	P.C.D		X		Dynamic permissible thrust(kN)			
d		Type			COT4	COM4 COU4			COT4	COM4 COU4	COT4 COU4	COM4				
14	3	COT4 COM4 COU4	22	30	44	44	5	5	33	31	5.4	M4	4.9			
16			28	35	52	51	6	6	40	38	6.6	M5	6.67			
20	32		40	56	56	44			42	9.81						
22	5		36	50	60	61	7	6	48				47	12.36		
25			44	56	-	76	8		-	58	9	M6	17.95			
28						-	-						21.08			
32	6															



Diameter d	Pitch P	Model Type	h	W	H	L	L1	W1	W2	C	M	l	Dynamic permissible thrust(kN)
10	2	WNM4	10	30	20	24	16	20	8	4	M4	8	2.168
12	2		11	38	22	30	20	26	10	5	M5	10	3.332
14	3		11	38	22	30	20	26	10	5	M5	10	4.165
16	3		14	44	28	35	24	32	10	5	M5	10	5.67
18	4		16	48	32	40	28	36	11	6	N6	12	7.412
20	4		16	48	32	40	28	36	11	6	M6	12	8.339
22	5		20	62	38	50	34	46	14	10	M8	16	10.506
25	5		20	62	38	50	34	46	14	10	M8	16	12.087
28	5		25	68	47	56	40	52	14	10	M8	16	15.258
32	6		25	68	47	56	40	52	14	10	M8	16	17.918

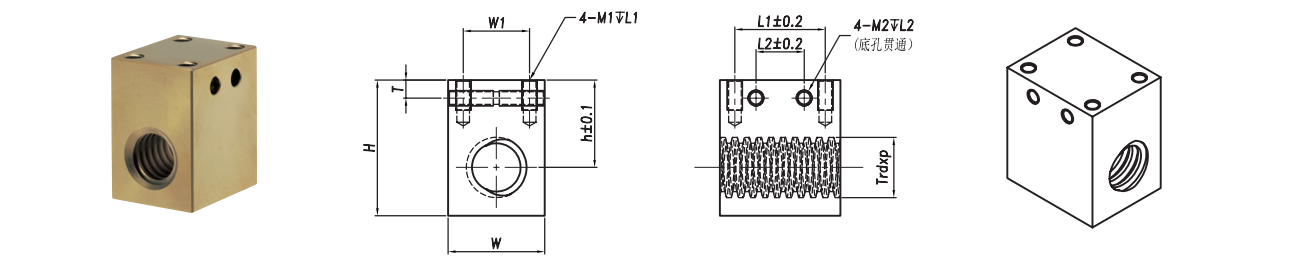

Diameter	Pitch P	Model	h	W	H	L	L1	L2	W1	M1	l1	M2	l2	t	Dynamic permissible thrust(kN)
d		Type													
10	2	HNM6	20	20	30	24	16	-	12	M4	8	-	-	6	2.168
12			23	22	34	30	21	9	13	M5	10	M5	15		3.332
14	3		27	28	41	35	25	11	18	M6	12	M6	18	7	4.165
16			29	32	45	40	30	16	22						5.67
18	4		30	36	48	50	40	20	26						7.412
20			30	36	48	50	40	20	26	8.339					
22	5		38	44	60	62	50	25	32	M8	16	M8	22	8	10.506
25			38	44	60	62	50	25	32						12.087
28	6		38	44	60	62	50	25	32						17.043
32			38	44	60	62	50	25	32	19.389					

NUT LIST | ANTI-BACKLASH NUT NOMENCLATURE

■ Anti-backlash nut ordering code structure

T 8 x 4 (P2) L - K C H T 2 - D16F28L30-B1 - 1


① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

No.	On behalf of the name		Labelling	Meaning	Labelling	Meaning	
①	Thread		T	Trapezoidal Thread	R	Round Thread	
			M	Metric Thread	G	Goethe thread	
			A	ACME Thread	X	Reciprocating thread	
②	Diameter		The numerical	Diameter			
③	Lead		The numerical	Lead			
④	Pitch		(P numerical)	Pitch			
⑤	Direction of thread		RH	Not marked by default			
			L	Left hand			
⑥	Anti-backlash code		The specific appearance	Query the 22 page table			
⑦	Nut shape		C	Cylindrical	L	Hexagonal	
			S	Square	Z	Other shapes	
			W	Widen the square			
			H	Heighten the square			
⑧	Shape of the flange		N	Without flange	X	Round flange milling square	
			O	Round flange without milling flat	A	Threaded connections	
			H	Round flange with double milling flat	B	Pin	
			Y	Round flange milling three parties	Z	Other shapes	
⑨	Mounting hole		N	Without mounting holes	U	Waist type hole	
			C	Countersunk hole	M	Threaded hole	
			T	Hole	Z	Other mounting holes	
⑩	Mounting holes amount		1-10	No mounting hole is not marked			
⑪	Nut shape features	Round nut	D	Nut OD	W	PCD	
			F	Flange dia	B	Flange thickness	
			L	Nut length	H	Flange cutting edge width	
		Square nut	L	Nut length	W	Width	
			H	Height	-	-	
⑫	Nut material		B1	Brass	S1	SS304	
			B2	Tin bronze	S2	SS316	
			B3	Phosphor bronze	S3	SS316L	
			B4	Aluminum bronze	S4	SS440c	
			P	P1	POM-C	BP(K/N)	Copper + plastic
				P2	POM-H	C	Cast iron、 1045
				P3	POM+PTFE	Q	Self lubrication (no oil)
			K	K1	PEEK(100%PEEK)	K3	PEEK(Carbon fiber reinforced)
				K2	PEEK(Glass fiber reinforced)	K4	PEEK(Contains 30% of "carbon fiber + graphite + PTFE")
			N	Nylon	AP	Aluminum alloy + plastic	
J	POK	BC	Brass+steel				
⑬ *	Final syllable		A-Z	Standard nut sequence	J	CNC machining	
			1-1000	Prevent duplicate Numbers	Z	Injection molding	
Note: "*" represents optional items.							


Note: "*" represents optional items.

NUT TYPE LIST | ANTI-BACKLASH NUT CODE NAME AND WCOT4/WCHT2 SERIES

■ Structures and codes of Anti-backlash Nut

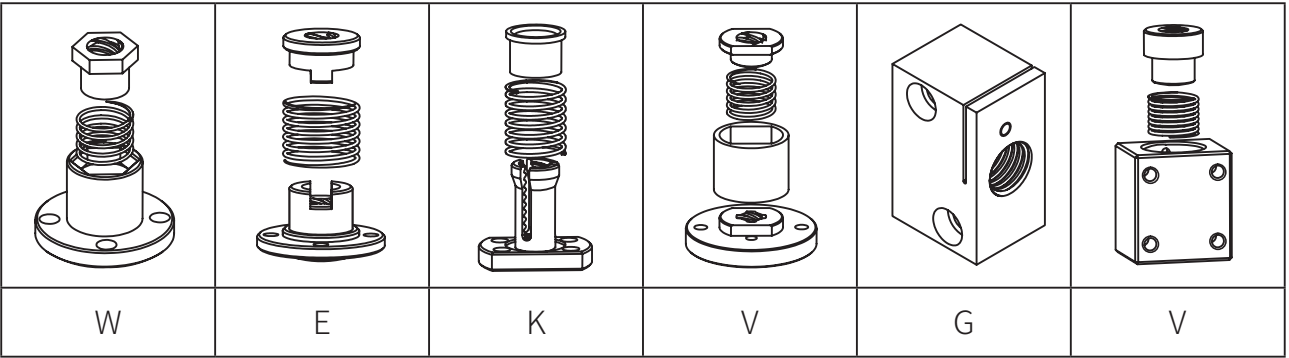


■ Anti-backlash nut | WCOT4/WCHT2 series

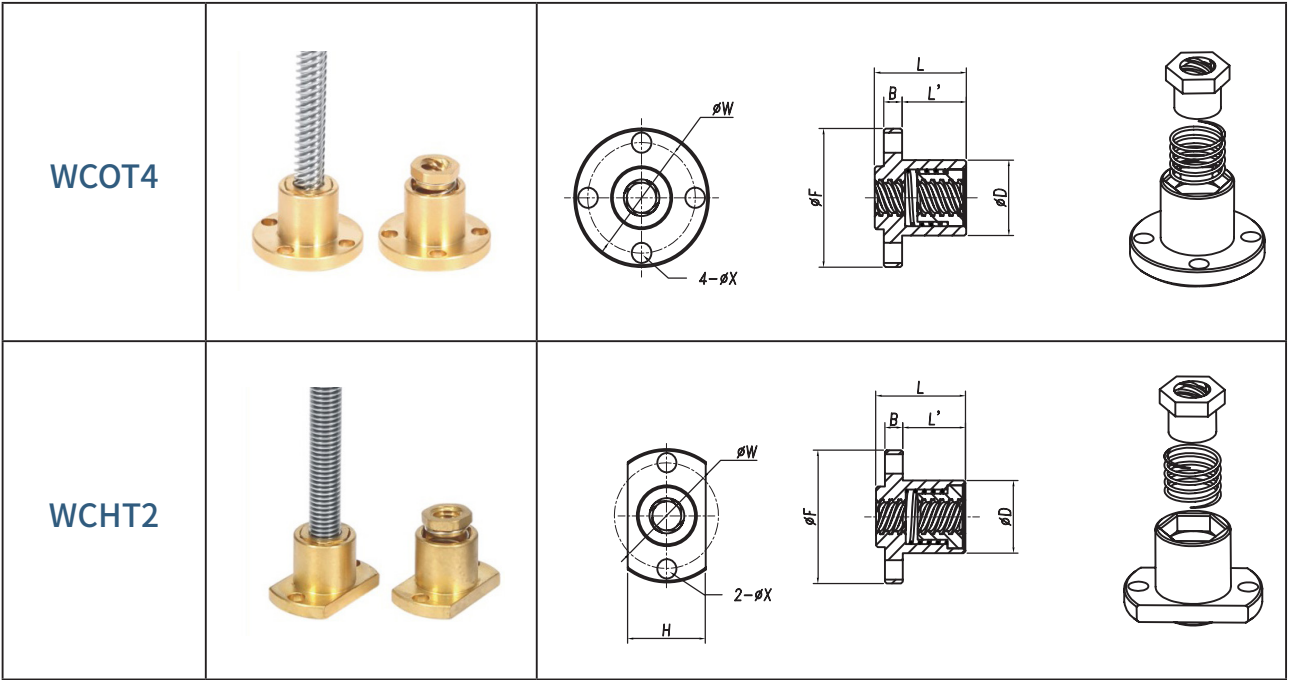

Anti-backlash nut | WCOT4/WCHT2 series


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	6	1	1	RH	WCOT4 WCHT2	12	22	15	3	13	10.5	17.5	3.2	B2	15g
T		3	1.5	RH											
T		6	1.5	RH											
T	6	1	1	RH		12	22	15	3	13	10.5	17.5	3.2	P1	4g
T		3	1.5	RH											
T		6	1.5	RH											
T	8	2	2	RH		17	30	25	4	20	19	23.5	3.5	B2	45g
T		8	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T		2	2	LH											
T		8	2	LH											
T	8	2	2	RH		17	30	25	4	20	19	23.5	3.5	P1	10g
T		8	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T		2	2	LH											
T		8	2	LH											

Anti-backlash nut | VCOT2 series

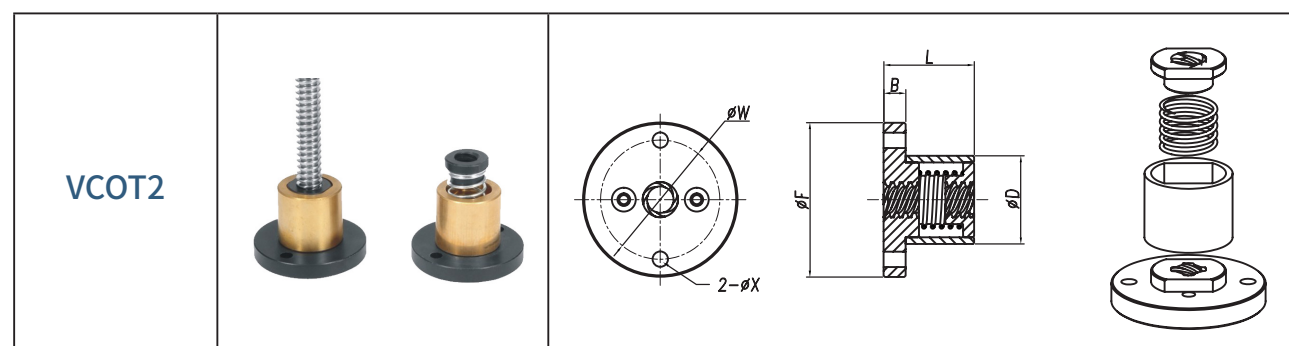


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	8	2	2	RH	VCOT2	20	35	20.5	5	/	15.5	26	3.5	P1+B2	35g
T		8	2	RH											

Anti-backlash nut | WCHT4 series

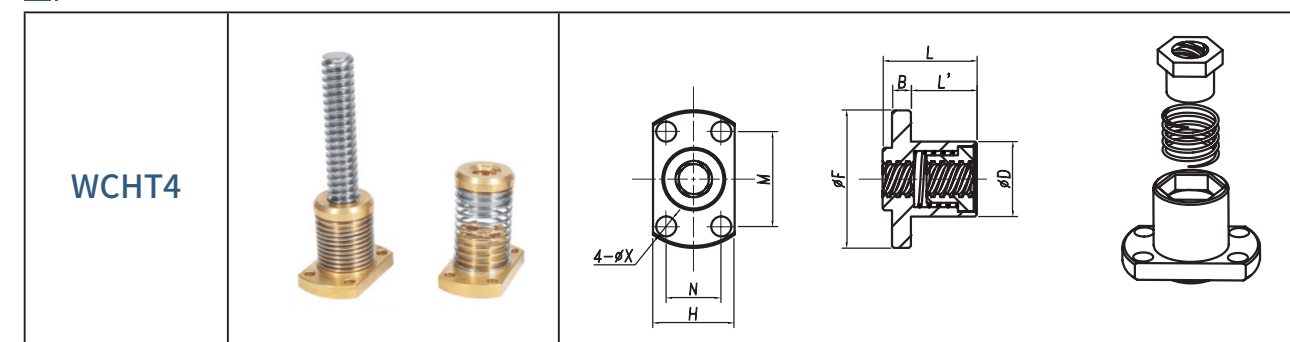


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	10	2	2	RH	WCHT4	20	35	30	5	22	22.5	25x13	4.2	B2	65
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	10	2	2	RH		20	35	30	5	22	22.5	25x13	4.2	P1	14
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											

Anti-backlash nut | WCYT3 series

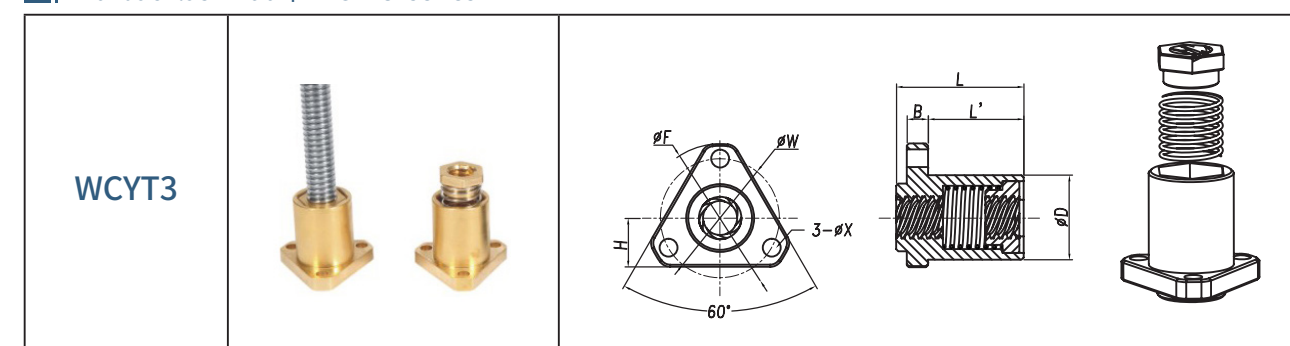


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	10	2	2	RH	WCYT3	20	35	29.5	5	11.5	22	28	4.2	B2	60
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	10	2	2	RH		20	35	29.5	5	11.5	22	28	4.2	P1	15
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											

Anti-backlash nut structure | ECOT4/ECHT2 series

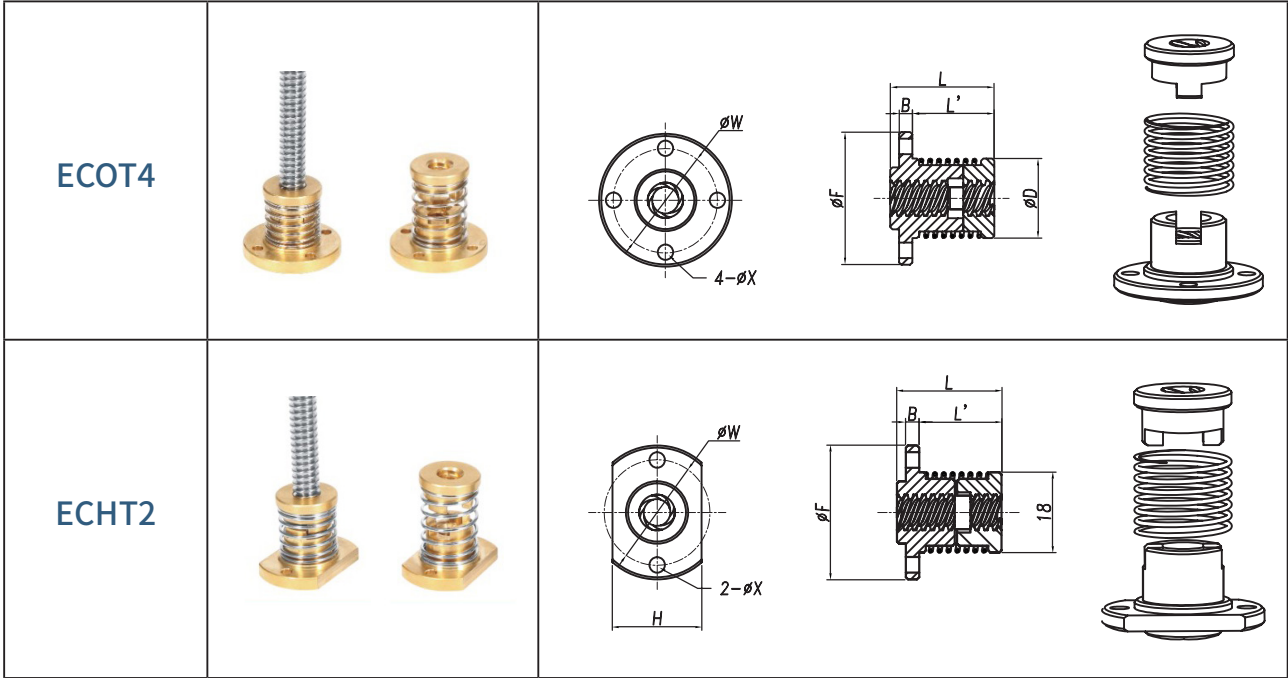


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	6	1	1	RH	ECOT4 ECHT2	12	22	15	3	13	10.5	17.5	3.2	B2	15g
T		3	1.5	RH											
T		6	1.5	RH											
T	6	1	1	RH		12	22	15	3	13	10.5	17.5	3.2	P1	4g
T		3	1.5	RH											
T		6	1.5	RH											
T	8	2	2	RH		17	30	25	4	20	19	23.5	3.5	B2	45g
T		8	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T		2	2	LH											
T		8	2	LH											
T	8	2	2	RH		17	30	25	4	20	19	23.5	3.5	P1	10g
T		8	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T		2	2	LH											
T		8	2	LH											

Anti-backlash nut | ECHT4 series

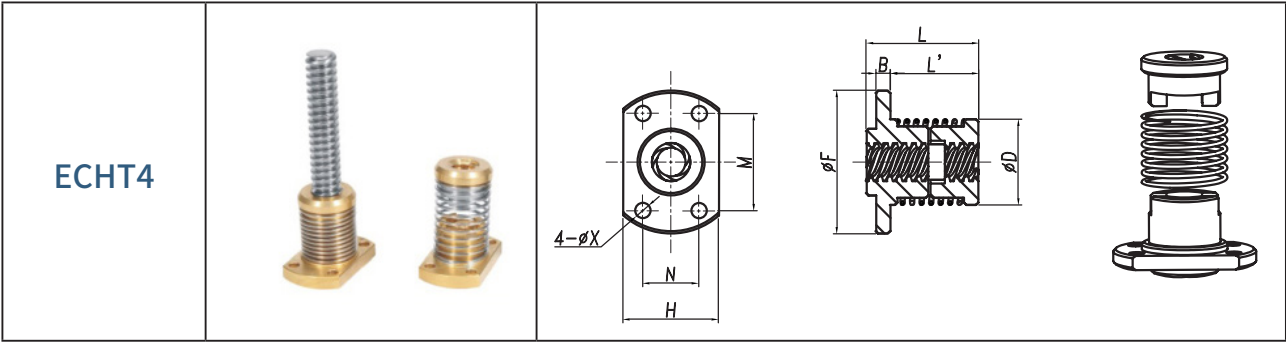


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	10	2	2	RH	ECHT4	20	35	30	5	22	22.5	25x13	4.2	B2	63
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	10	2	2	RH		20	35	30	5	22	22.5	25x13	4.2	P1	15
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	12	3	2	RH		23	40	34.5	6	25	25.5	27x17	4.2	B2	97
T		6	2.5	RH											
T		12	2	RH											
T		20	2.5	RH											
T		3	2.5	LH											
T		12	2	LH											
T	12	3	2.5	RH		23	40	34.5	6	25	25.5	27x17	4.2	P1	24
T		6	2	RH											
T		12	2.5	RH											
T		20	2.5	RH											
T		3	2.5	LH											
T		12	2.5	LH											

Anti-backlash nut | ECYT3 series

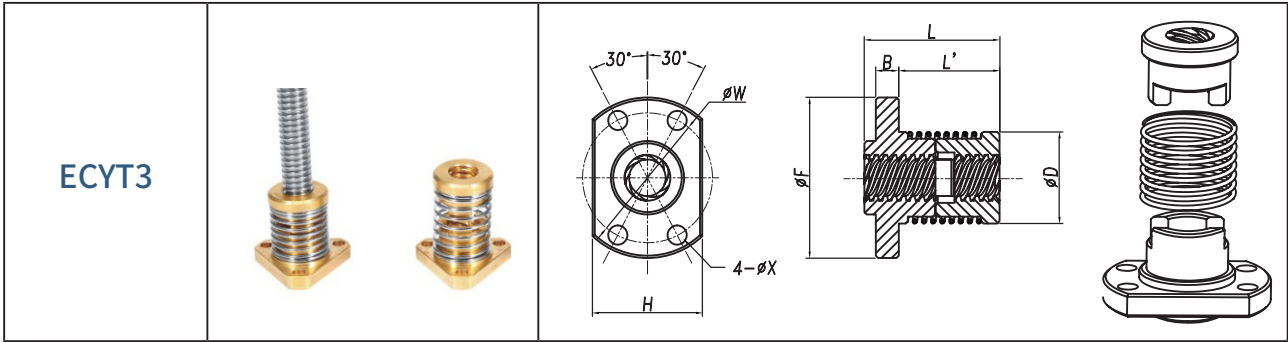


Thread specification					Nut shape and size									Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)									
						D	F	L	B	H*	L'	W(MxN)	X		
T	10	2	2	RH	ECYT3	20	35	30	5	11.5	22.5	28	4.2	B2	62
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	10	2	2	RH		20	35	30	5	11.5	22.5	28	4.2	P1	13
T		5	2.5	RH											
T		10	2	RH											
T		15	2.5	RH											
T		20	2.5	RH											
T	12	3	3	RH		23	40	34.5	6	13	25.5	32	4.2	B2	92
T		6	3	RH											
T		12	3	RH											
T		20	2.5	RH											
T		3	3	LH											
T	12	12	3	LH		23	40	34.5	6	13	25.5	32	4.2	P1	24
T		3	3	RH											
T		6	3	RH											
T		12	3	RH											
T		20	2.5	RH											
T		3	3	LH											
T	12	3	LH												


Anti-backlash nut | KCHT4 series

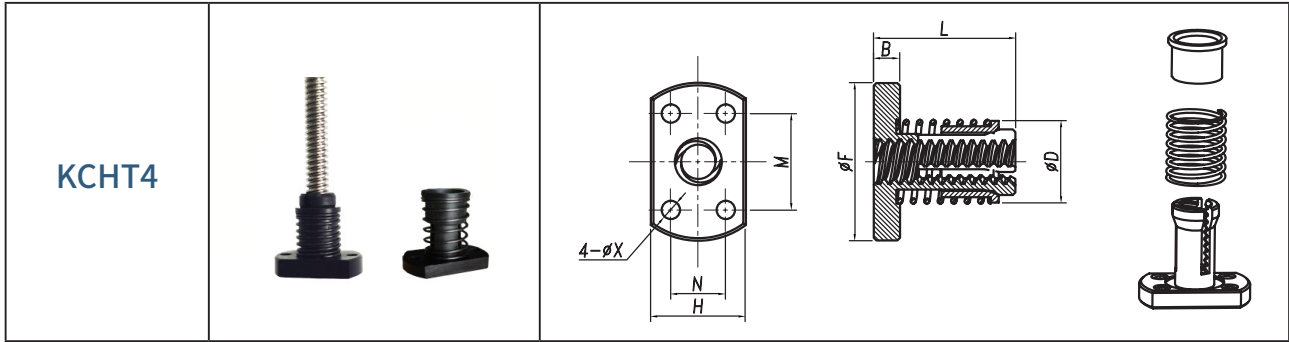

Thread specification					Nut shape and size								Material	Weight
Type	Diameter	Lead	Pitch	Direction of thread	Model	Size (mm)								
						D	F	L	B	H	W	X		
T	8	2	2	RH	KCHT4	16	30	27	5	18	21	3.5	P1	10g
T		4	2	RH										
T		6	1.5	RH										
T		8	2	RH										
T		10	2	RH										
T		12	2	RH										
T		20	3.33	RH										


Plastic materials

The name of the material	POM and modified materials	PEEK and modified materials	Nylon and modified materials	Other high strength wear-resistant plastics
Material appearance				
Using the environment	Conventional environment	Special environment	Conventional environment	
Characteristics	Balancing features	Corrosion resistance, solubility resistance, flame retardant, heat resistance	General	
Others	According to the modification can be lubricated and conductive	Hygienic quality of food	Insulation	
Mechanical strength	Standard	Excellent	Excellent	Consult business personnel for detailed
Heat resistance	Standard	Excellent	Excellent	
Wear resistance	Excellent	Standard	Standard	
Machinability	Excellent	Standard	Standard	
Price	General	Higher	General	

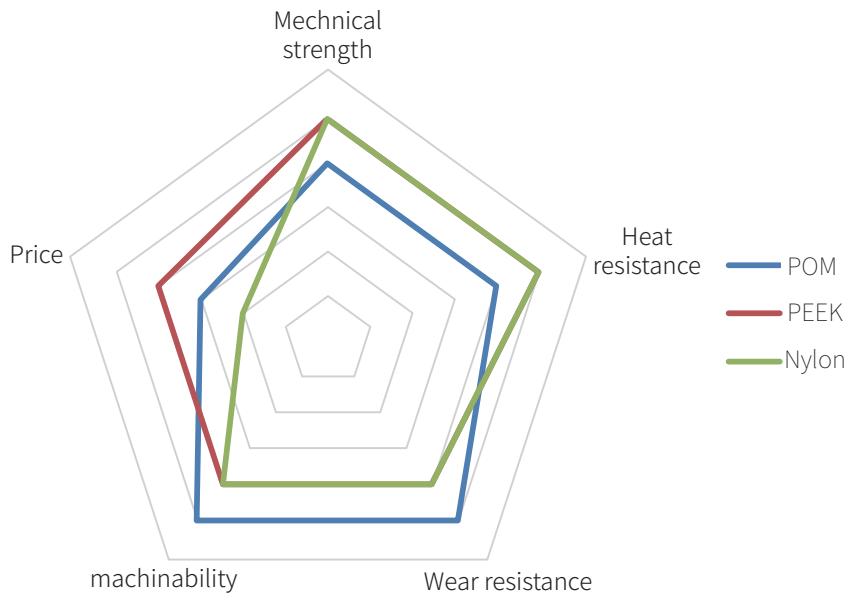

Metal materials

The name of the material	Brass	Zinc Alloy	1045、Cast iron	Stainless steel	Tin bronze, phosphorus bronze, aluminum bronze and other selflubrication	Self lubricating (no oil type)
Material appearance						
Using the environment	Conventional environment	Conventional environment	Conventional environment	Conventional environment	Conventional environment	Conventional environment
Characteristics	Corrosion resistant	Corrosion resistant	High strength	Corrosion resistant	Corrosion resistant	Corrosion resistant
Others	Good heat dissipation performance	Good cast molding	Easy processing	Hygienic quality of food	All kinds of characteristics	With graphite, self lubricating
Mechanical strength	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Heat resistance	Excellent	Excellent	Excellent	Excellent	Excellent	Excellent
Wear resistance	Standard	Standard	Standard	Standard	Standard	Standard
Machinability	Excellent	Excellent	Standard	General	Excellent	Excellent
Price	General	Higher	General	Higher	General	General

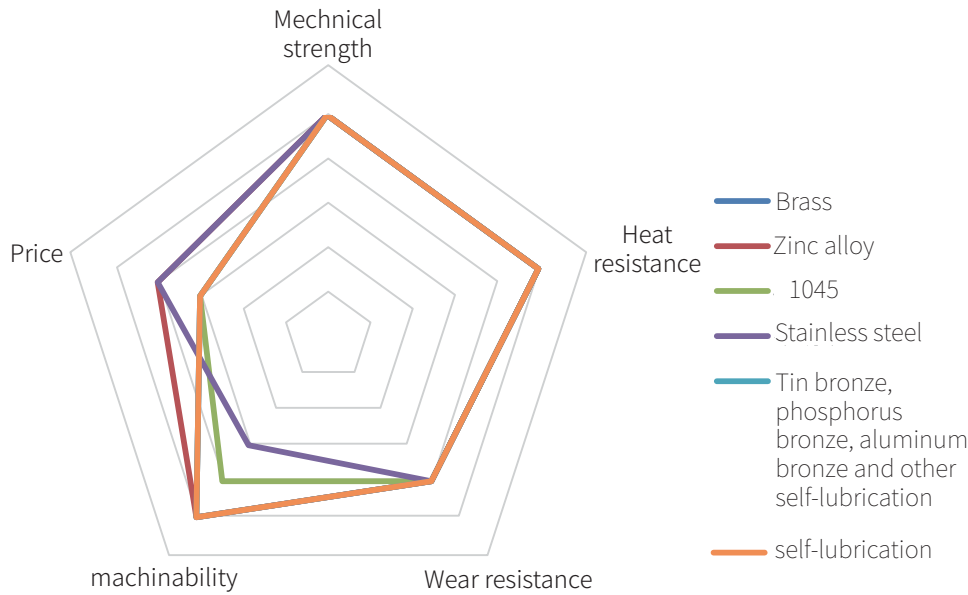

Clearance

Category	Nut structure		Features	Applicable nut material			
Regular grade	General type		Big clearance	Brass、Tin bronze、Phosphor bronze、 Aluminum bronze、POM、PEK、nylon、POK、 Stainless steel、1045、Zinc alloy、 Brass+Plastic、Aluminum alloy+Plastic、 Brass+Steel、 Self lubricating(No oil type)			
			Medium clearance				
			Small clearance				
	Anti-backlash type		No clearance				
Precision grade	General type		Medium clearance				
			Small clearance				
			Micro clearance				
	Anti-backlash type		No clearance				
Precision grade	3	4	5	6	7	8	9
Axial clearance	0.015-0.03	0.02-0.04	0.03-0.06	0.06-0.1	0.1-0.15	0.12-0.18	0.16-0.24


Axial clearance

$$ep = \frac{2 \times lu}{300} \times 0.21 \text{ (mm)}$$

lu: Effective length of thread

Self-locking

Because of the thread profile characteristics of trapezoidal screw, So the spiral Angleλof different specifications screw is not the same, and the equivalent friction coefficient fv between screw nuts of different materials is also different. Then apply a positive pressure F to the nut at the rated load,The screw and nut cannot slip when the helix Angle λ is less than the equivalent friction Angle R, this condition called self-locking of screw.

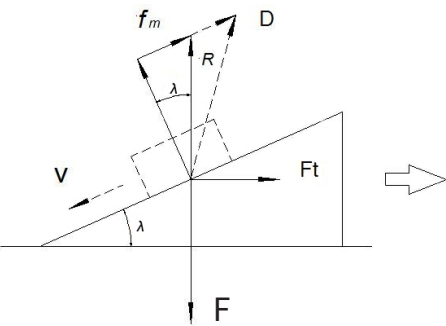

$$\lambda = \arctan(S/\pi d)$$

λ: Helix Angle
S: Thread lead
π: PI
d: Thread pitch diameter

$$fv = f/\cos\beta$$

fv: Equivalent friction coefficient
f: friction coefficient
β: thread form bevel

$$R = \arctan fv$$

λ: Helix Angle
fv: Equivalent friction coefficient
R: Equivalent friction Angle

$$\lambda < R$$

with Self-locking

$$\lambda > R$$

without Self-locking

In the vertical lifting system, the screw with self-locking does not need to be equipped with additional locking device, which provides a higher safety factor when the motor stalls, and provides more selection schemes for designers in terms of functions.

Shaft end processing drawing





SCREW TECHNOLOGY CO.,LTD.

Add: No 988, Wsong Road, Wuzhong District, Suzhou, China

Tel: +86-19522756236

E-mail: IMD@screwtech.cn

Web: <http://www.screw-tech.com/>

LS-5.2.3
20210128