
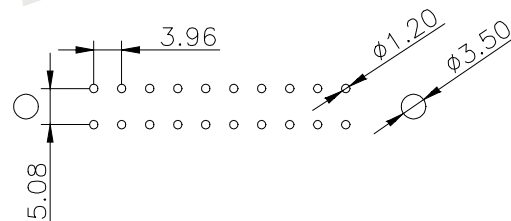
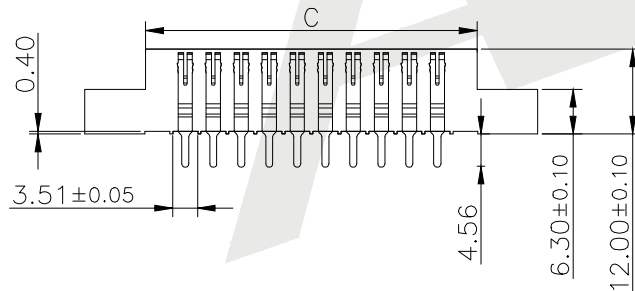



HSF

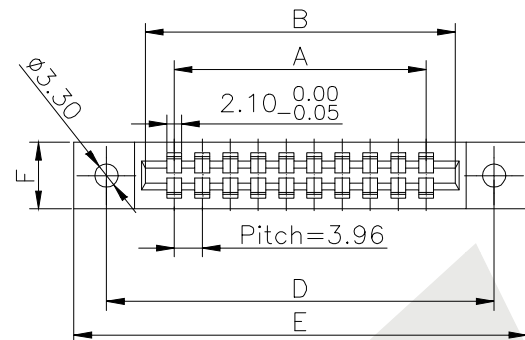

Note:

1. Requirements:

1.1 Material: PBT / PA9T / PPS

1.2 Appearance: Burr: 0.03mm Max, No Lack of Glue, Deformation, Discoloration.

1.3 The Size Marked With "" Is The Key Control Size, QC Needs To Test

Order code:

ECCS - X - D - A - S0 - P - B - 02

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① SERIES NO:ECCS

② Number of Pins: X
FOR Example:50=50P

③ Pitch:D:3.96MM

④ DIP Length:
A=4.56MM⑤ Contact Plating
G0:Gold flash
S0: Gold flash/Ni
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SN:Tin⑥ Plastic Materials:
P:PBT A:PA9T S:PPS

⑦ Packing

A:Tray

B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

⑧ Product NO.:02

Dimension

25/50	95.10	103.23	106.27	114.22	123.60	
24/48	91.14	99.26	102.31	110.26	119.63	
22/44	83.21	91.34	94.39	102.34	111.71	
18/36	67.36	75.49	78.54	86.49	95.86	
15/30	55.47	63.60	66.65	74.60	83.97	
12/24	43.59	51.71	54.76	62.71	72.09	9.40
11/22	39.62	47.75	50.80	58.75	68.12	
10/20	35.66	43.79	46.84	54.79	64.16	
08/16	27.74	35.86	38.91	46.86	56.24	
07/14	23.77	31.90	34.95	42.90	52.27	
06/12	19.81	27.94	30.99	38.94	48.31	
Pin No.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
Wu Feng RongDATE
02/11/2020CHECK
BobYangDATE
02/11/2020

ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

3.96mm Slot Straight DIP With Ear Connectors 12.0MM H

DRAWING NO: ECCS-XDASOPB02

PRODUCT NO: ECCS-XDASOPB02



3rd ANGLE PROJECTION

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8