

RF12-200

(12V200Ah)




- Non-Spillable Sealed Construction
- Absorptive Glass Mat System (AGM System)
- ABS (Acrylonitrile Butadiene Styrene) container and cover
- Gas Recombination
- Maintenance-Free Operation
- Low Pressure Venting System
- Low Self-Discharge - Long Shelf Life
- Wide Operating Temperature Range
- High Recovery Capability



SPECIFICATION

Cells Per Unit	6
Voltage Per Unit	12
Nominal Capacity	200Ah@10hour-rate to 1.80V per cell @25°C
Weight	Approx. 58 Kg (Tolerance±3.0%)
Internal Resistance	Approx. 4.2 mΩ
Terminal	F16(M8)/F10(M8)
Max. Discharge Current	2000A (5 sec)
Short Circuit Current	3400A
Design Life	12 years (Float charging)
Max. Charging Current	60.0 A
Reference Capacity	C3 154.8AH C5 174.5AH C10 200.0AH C20 212.0AH
Standby Use Voltage	13.7 V~13.9 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	14.6 V~14.8 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: -10°C~60°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	RESTAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

DIMENSIONS

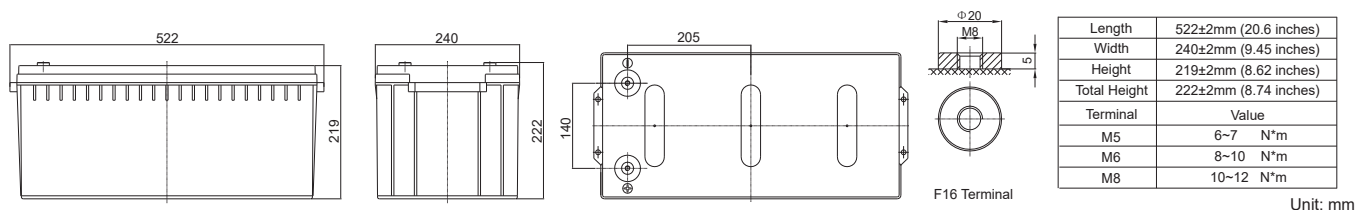

Constant Current Discharge Characteristics : A (25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	430.5	348.7	214.7	122.2	72.8	56.4	44.3	37.7	25.4	21.1	11.0
1.65V	406.8	333.4	206.1	118.0	70.5	54.7	43.1	36.8	25.1	20.8	10.9
1.70V	374.5	312.3	197.0	114.2	68.2	53.2	42.0	35.8	24.7	20.5	10.7
1.75V	342.8	290.6	188.3	110.0	65.8	51.6	40.9	34.9	24.3	20.3	10.6
1.80V	310.3	268.3	179.9	105.8	63.4	50.0	39.7	34.0	23.9	20.0	10.5
1.85V	253.6	222.7	155.0	94.9	58.1	46.2	36.9	31.7	22.5	18.8	10.0

Constant Power Discharge Characteristics : WPC (25°C)


F.V/Time	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	731.8	609.7	389.9	229.6	138.0	107.7	85.1	72.7	49.5	41.5	21.7
1.65V	704.9	591.5	378.2	223.0	134.2	104.9	83.1	71.1	49.1	41.0	21.4
1.70V	660.8	562.3	365.2	217.1	130.5	102.5	81.2	69.5	48.4	40.5	21.2
1.75V	615.8	530.9	352.6	210.5	126.5	99.8	79.4	68.0	47.8	40.0	21.0
1.80V	567.1	497.1	340.4	203.6	122.6	97.1	77.4	66.5	47.1	39.5	20.8
1.85V	471.8	418.4	296.1	183.7	113.0	90.2	72.2	62.2	44.4	37.3	19.7

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


Discharge Characteristics Curve

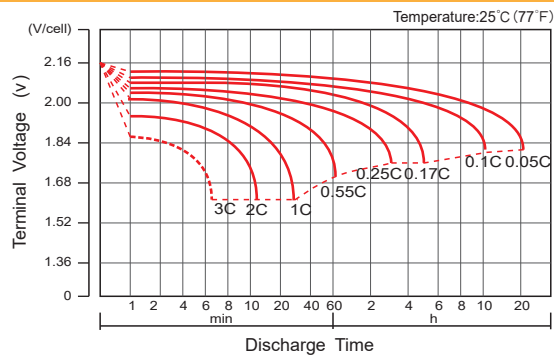


Charge Characteristic Curve For Standby Use

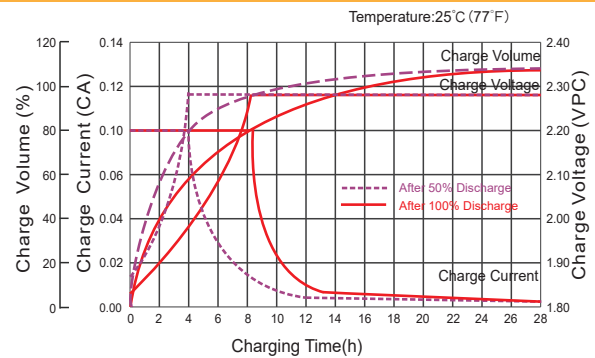


Cycle Life In Relation To Depth Of Discharge

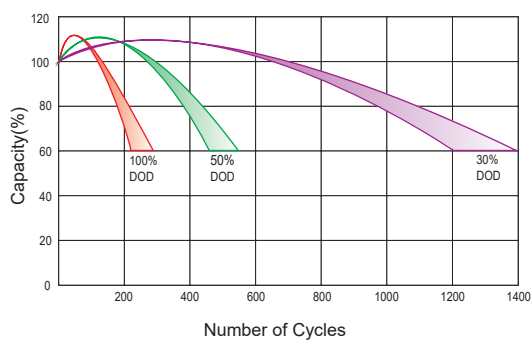


Relationship Between Charging Voltage And Temperature

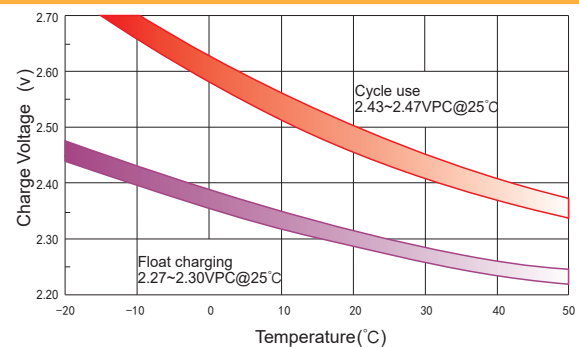


Temperature Effects On Capacity

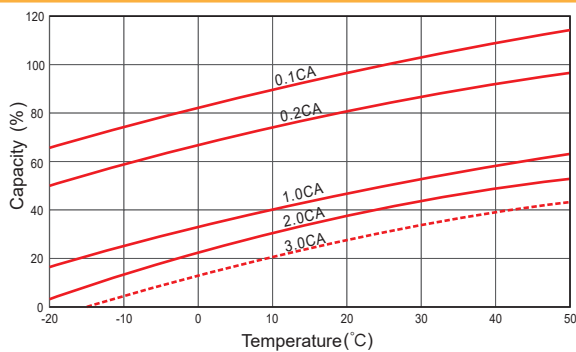


Storage Characteristics

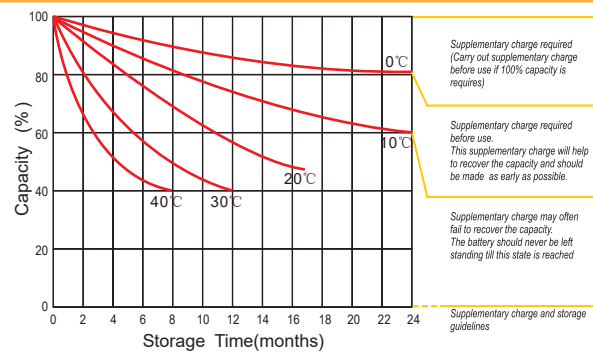

Effect Of Temperature On Long Term Life

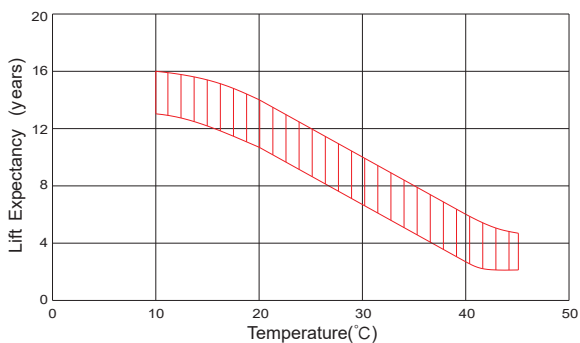

Life Characteristics Of Standby Use

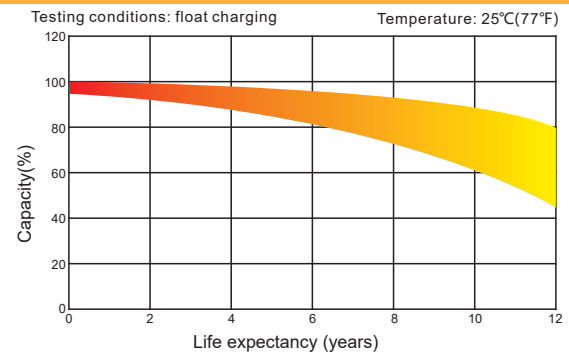

(Note) All above information shall be changed without prior notice, Restar reserves the right to explain and update the latest information.