
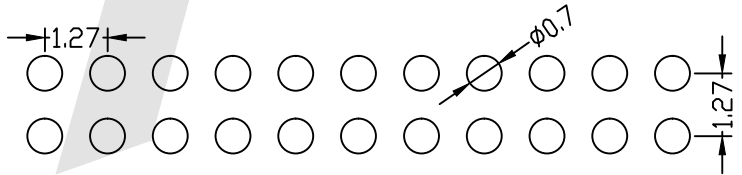
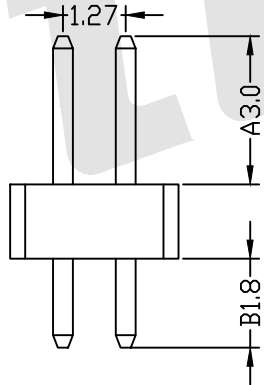
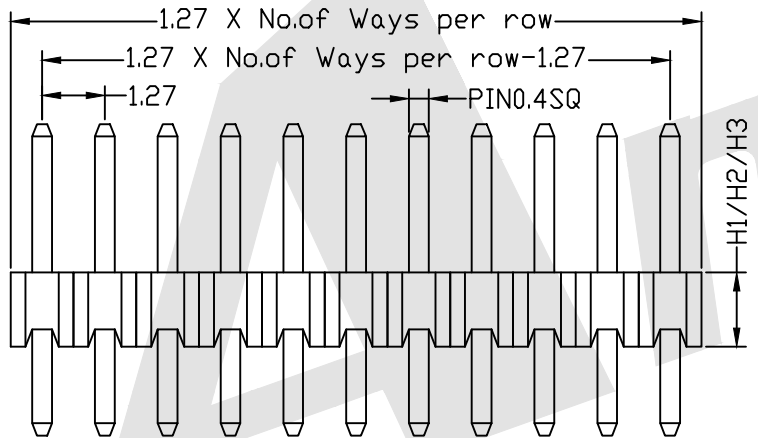


HSF

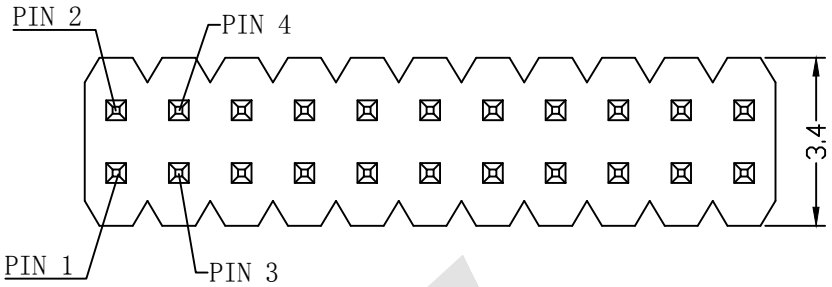

P. C. B LAYOUT

SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black


Ordering Code:

PHCS07 - X - X - D - A-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A: 0300=3.00mm
 B: 0180=1.80mm
 Please mark the desired length
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H1:0.85mm
 H2:1.0mm
 H3:1.5mm

Standard IE P/N : PHCS07-10-G0-D-0300-0180-B-B-H2

A	B	Unless Otherwise specified tolerance		ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
3.0	1.8	X. ±0.35	X.XX: ±0.20	
		X.X: ±0.25	X.XXX: ±0.15	
Optional		SCALE: As Shown	UNIT: mm	TITLE: 1.27mm Pin Header Straight Type Dual Row
		DRAW YG ZHONG	DATE 12/07/2015	
		CHECK BobYang	DATE 12/07/2015	
REV	DESCRIPTION		DATE	DRAWING NO: PHCS07-XXD-030-0180-XXX PRODUCT NO: PHCS07-XXD-030-0180-XXX



Increase packing method and material