


NOTES:
Housing:LCP High-Temp Plastic UL94V-0 Black
Terminal:Phosphor Bronze
Plating:10u" Gold IN Contact Area Matte Tin on Tail

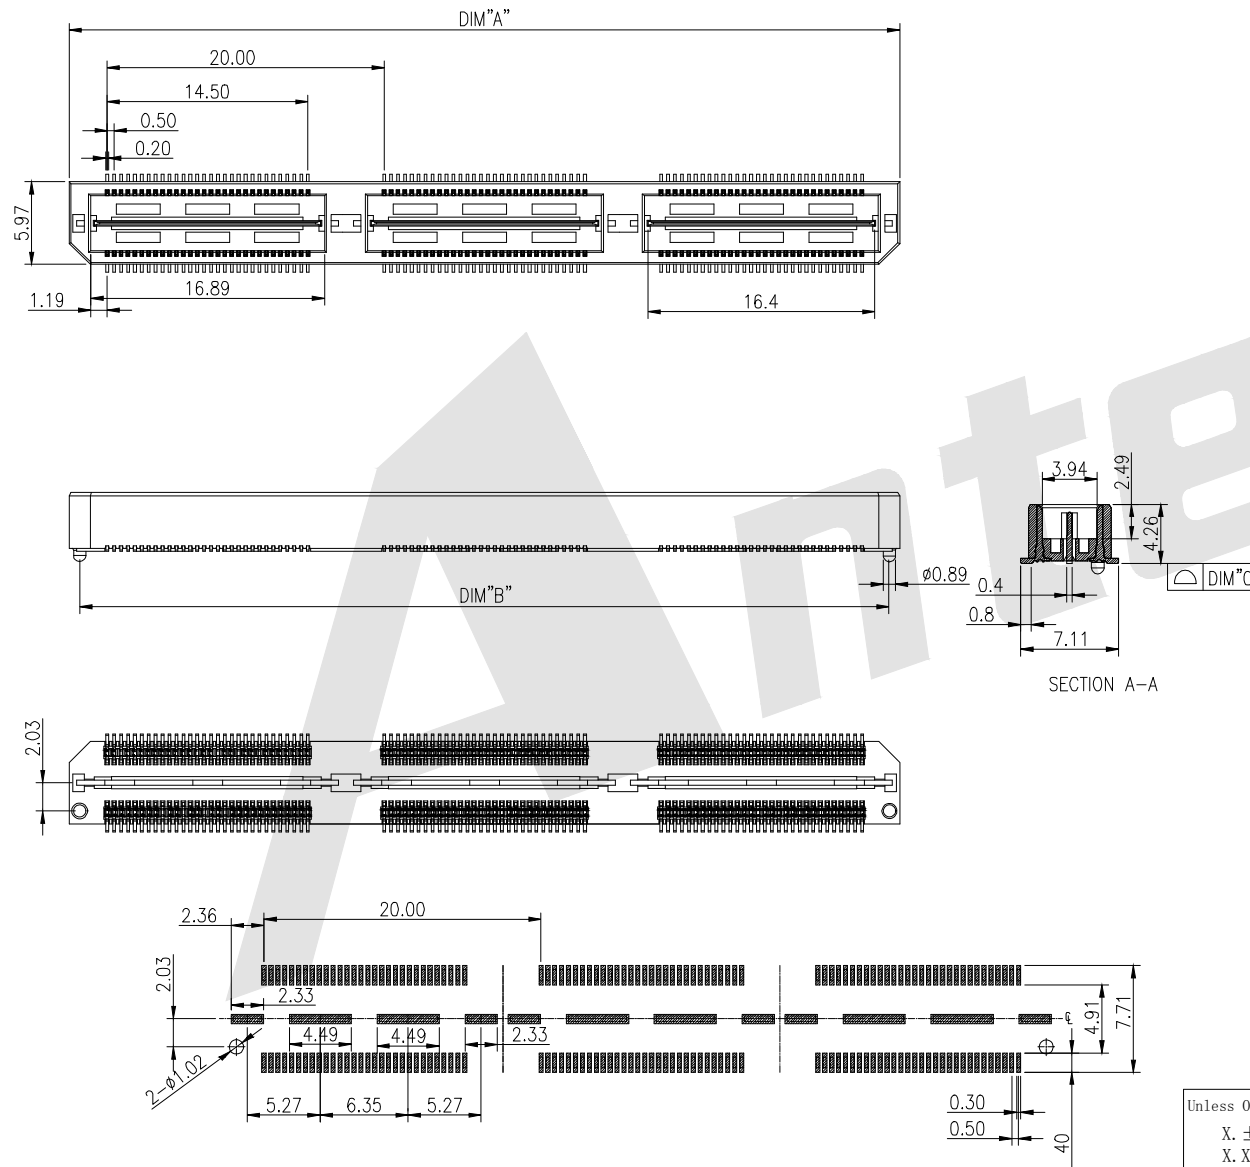

Ordering Code:

BB0.5 - M - X - X - X - 05
① ② ③ ④ ⑤ ⑥

- ① Series NO:
0.5mm Board to
Board connector
- ② M:Male
- ③ NO. of Contacts:
See Table
For Example
180:180 Poles
- ④ Contact Plating:
S0:Selective
S1:Selective 3u"
S2:Selective 5u"
S3:Selective 10u"
S4:Selective 15u"
S5:Selective 30u"
SN:Tin
- ⑤ Packing
T:Tube A:Tray
B:Bag U:Tube+CAP
R:Tape & Reel
W:Tape & Reel+CAP
- ⑥ Serial Number: 05

No of contacts	Dimensions		
	A.	B.	C.
60	20.00	18.48	0.10
120	40.00	38.48	0.10
180	60.00	58.48	0.15
240	80.00	78.48	0.15
300	100.00	98.48	0.15

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang

UNIT:
mm
DATE
12/09/2020
DATE
12/09/2020

Antenk ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

0.5mm DOUBLE ROW BTB MALE PLUG H4.26

DRAWING NO: BB0.5-MXXX05

PRODUCT NO: BB0.5-MXXX05



REV DESCRIPTION DATE