


**NS-8964F 自動轉頭女裝襯衫右前幅壓平機**  
**Automatic Rotation Lady Shirt Front Right Press**  
**NS-8965F 自動轉頭女裝襯衫左前幅壓平機**  
**Automatic Rotation Lady Shirt Front Left Press**

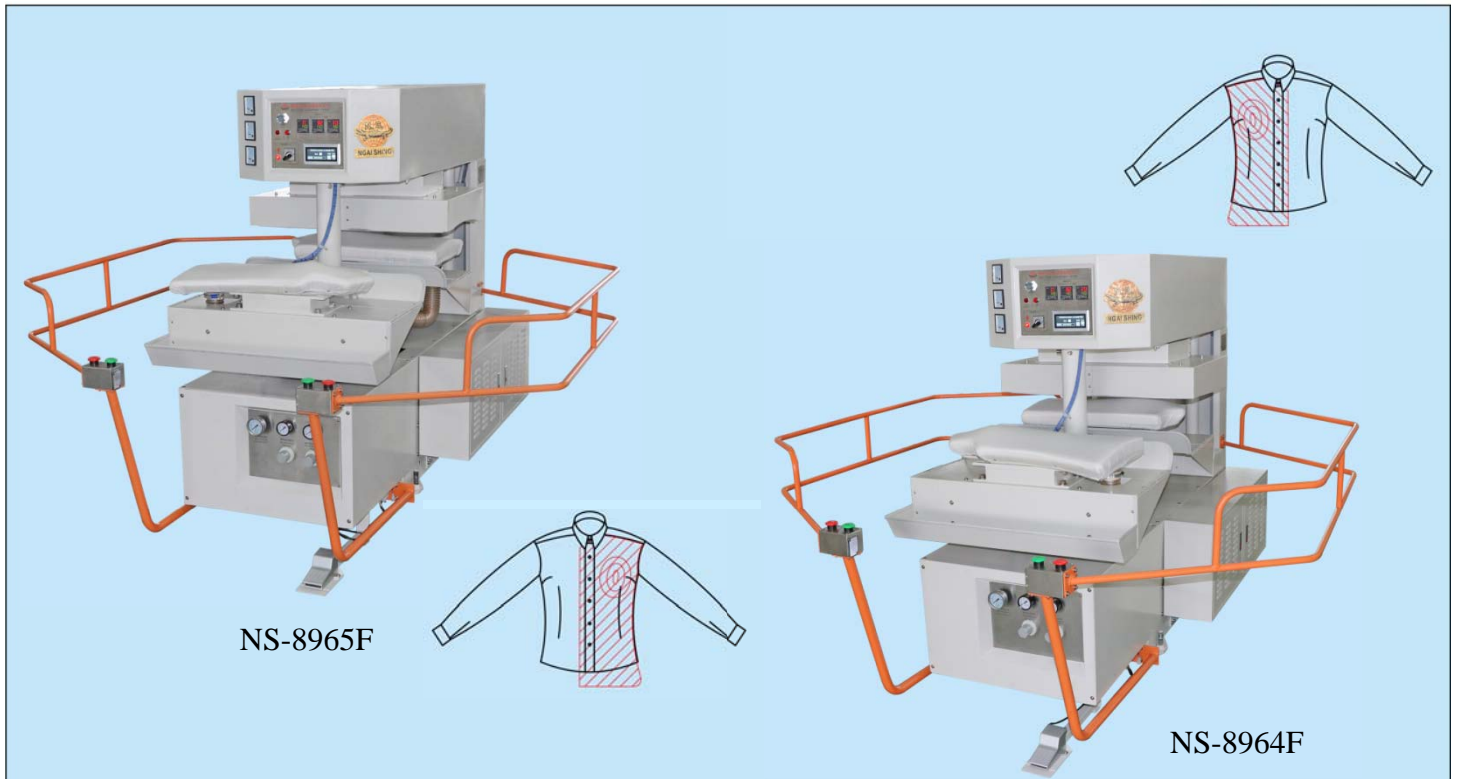

NS-8965F

NS-8964F

- 適用於女裝襯衫前幅防皺壓熨
- 採用PLC控制器控制及人性化觸摸顯示屏操作
- 採用垂直加壓方式，壓力效率更高，壓熨更平整
- 輕壓、重壓兩種壓熨方式供選擇設定，可滿足不同面料需求
- 上模電加熱，採用三個獨立數字式溫度控制器分區控制，溫度控制更精確，最高設計溫度200℃
- 上加熱板只有一套，下模有兩套作業可節省電力
- 自動旋轉式雙下模，操作方便、工作效率高
- 下模可抽濕(需另購真空泵)，有助衣物定位，冷卻、定型效果佳

**選購件：**

NS-3400 系列真空抽濕泵

- Suitable for lady shirt front wrinkle-proof pressing
- Adopt PLC and user friendly touch screen for operation
- Vertical pressing mode provides heavy pressure and more smooth effect
- Two pressing modes, i.e. light press and heavy press, are available for selection to satisfy different fabrics
- Upper mould is electric heated with three independent digital thermostats for accurate temperature control of each zone; design temperature 200 °C
- Reduced electricity consumption as only the upper mould with heater that works alternately with two lower moulds
- Easy operation and high efficiency due to automatic rotation lower moulds design
- The lower moulds with vacuuming function (**need to purchase a vacuum pump additionally**) to facilitate garment fixing, cooling down and shaping

**Option:**

NS-3400 series vacuum pump

型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率(kW) Heater Power	工作檯平均壓力(kgf/cm <sup>2</sup> ) Average Pressure of Working Platform	壓縮空氣壓力(kgf/cm <sup>2</sup> ) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-8964F	3PH/380V/50Hz	5.5	5.4	3	5	180	2160x2300x1650
NS-8965F							



**藝誠(余氏)發展有限公司**  
**Ngai Shing Development Limited**

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,

Cheung Sha Wan, Kln., Hong Kong.

Tel: (852)2741 9981, 2742 0078

E-MAIL: info@ngaishing.com

Fax: (852)2785 3149

Http://www.ngaishing.com