

NS-5610-600/NS-5610-1000

粘合機

Fusing Machine






NS-5610-600



NS-5610-1000


- 適用於褲頭、襟樸、領、袖、介英等衣物整熨及粘合
- 備上、下發熱線及自動恆溫，控制溫度精確
- 自動輸送帶備平衡系統，輸送帶速度可調校
- 加壓壓力可調節，收料台備有風冷裝置確保了極佳的粘合效果

- Suitable for waist band, front placket, collar, sleeve and cuff fusing and pressing
- Apply upper & lower heater and thermostat; temperature is controlled accurately
- This machine is equipped with automatic belt balance system and the conveying speed is adjustable
- The pressing pressure is adjustable and the collecting table has air cooling device for better fusing effect

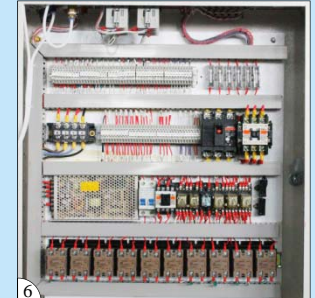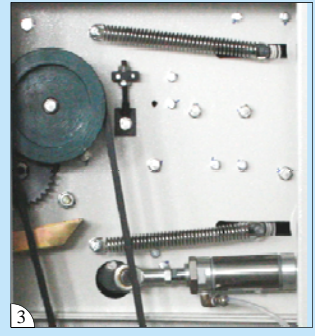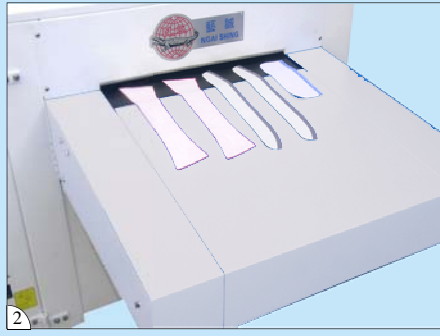

1. 活動式清潔系統，方便清潔
2. 適合多種衣物裁片粘合及壓熨
3. 氣動加壓，加壓效果佳
4. 入料檯面，適用於處理長及大面積衣物，如恤衫前筒，西裝前幅等
5. 收料檯面
6. 高質電器元件

1. Flexible cleaning system, easy to clean
2. Suitable for different garment fusing and pressing
3. Pneumatic pressing, pressing effect is good
4. Feeding table, suitable for long or big garment piece like shirt front placket or suit front, etc.
5. Collecting table
6. High quality electric elements

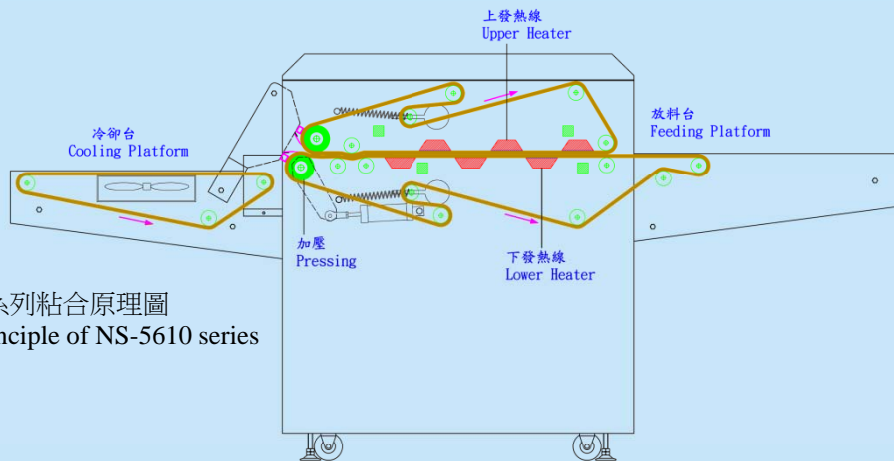

NS-5610系列粘合原理圖
Fusing principle of NS-5610 series

| 型號 Model | 電源 Power Supply | 發熱線功率(kw) Heater Power | 粘合帶寬 Belt Width (mm) | 加壓方式 Pressure Increasing Mode | 壓縮空氣壓力 Compressed Air Pressure (kgf/cm ²) | 平均粘合壓力 (kgf/cm ²) Average Fusing Pressure | 上發熱線(kw) Upper Heater | 下發熱線(kw) Lower Heater | 最高溫度(°C) Max Temp. | 機身尺寸 (mm) Machine Size |
|--------------|--------------------|---------------------------|----------------------------|-------------------------------------|-------------------------------------------------------------|----------------------------------------------------------------|--------------------------|--------------------------|-----------------------|---------------------------|
| NS-5610-600 | 3PH/380V/50Hz | 9.6 | 600 | 氣動加壓 By Air Cylinder | 5 | 1 | 4.8 | 4.8 | 200 | 2550x1270x1180 |
| NS-5610-1000 | 3PH/380V/50Hz | 12 | 1000 | | | | 6 | 6 | | 2540x1560x1160 |



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com