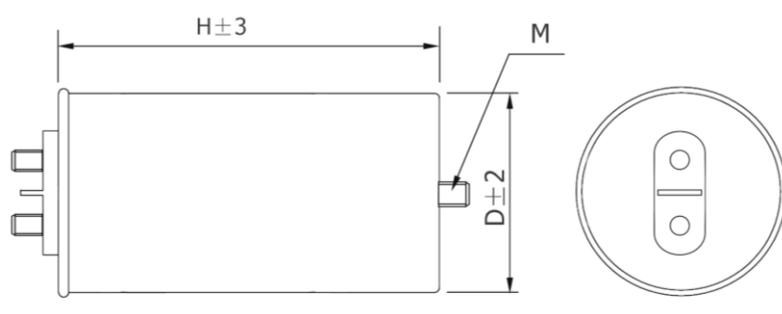


**Metallized Film Capacitor**

Application: Used to improving the cosφ in the Low voltage AC system.

**Datasheet**

TYPE	BGMJ-0.45-15-1	NO:YJ140924-12
------	----------------	----------------

<p>Metallized Film Capacitor</p> 	<p><b>Mark:</b> According to the customer's requirements</p>
---	--

**Specifications**

No.	Spec.		Outline size (mm)		Out terminal form	Note
	Voltage	capacitance	D	H	Spec.	
1	450VAC	15Kvar	86	225	M8-Copper screw	

Features:excellent self-healing property,small dissipation factor,good capacitance.

Application: Used to improving the cosφ in the Low voltage AC system.

- Specification:**
- 1、 Rated Voltage: 450VAC
  - 2、 Rated capacitance: 15Kvar
  - 3、 Phase:1
  - 3、 Capacitance tolerance: -5~10%
  - 4、 Dissipation factor:≤0. 2%(100Hz,+25℃)
  - 5、 Voltage proof between terminals:2.15Un-60s,no permanent breakdown or flashover
  - 6、 Voltage proof between terminal & case:3000VAC-60s,no permanent breakdown or flashover
  - 7、 Max voltage:1.1Un Max current:1.3In
  - 8、 Outline size:φ 86\*225(Tin case,coverd by epoxy resin)
  - 9、 Out terminal spec.: M8-Copper screw
  - 10、 Self-discharging performance:the remaining voltage from  $\sqrt{2}U_n$  to below 75V after cut-off.
  - 11、 Built-in pressure cut-off protection device.



Tel: +86-514-87782298, 87782296      FAX:+86-514-87782297, 87367519  
 E-mail:[positioning@china.com](mailto:positioning@china.com); [info@yzpst.com](mailto:info@yzpst.com); [info@stt.tm](mailto:info@stt.tm); [info@goldstar.tm](mailto:info@goldstar.tm)  
 Web Site:[www.yzpst.com](http://www.yzpst.com) [www.stt.tm](http://www.stt.tm) [www.goldstar.tm](http://www.goldstar.tm) [www.Pst888.com](http://www.Pst888.com)  
[www.positioning.en.alibaba.com](http://www.positioning.en.alibaba.com) [www.pst.manufacturer.globalsources.com](http://www.pst.manufacturer.globalsources.com)