


NS-89P-1自動切領咀反領焗領機


Automatic Collar Trimming, Turning and Blocking Machine



切領咀、反領操作
Collar tip trimming and turning

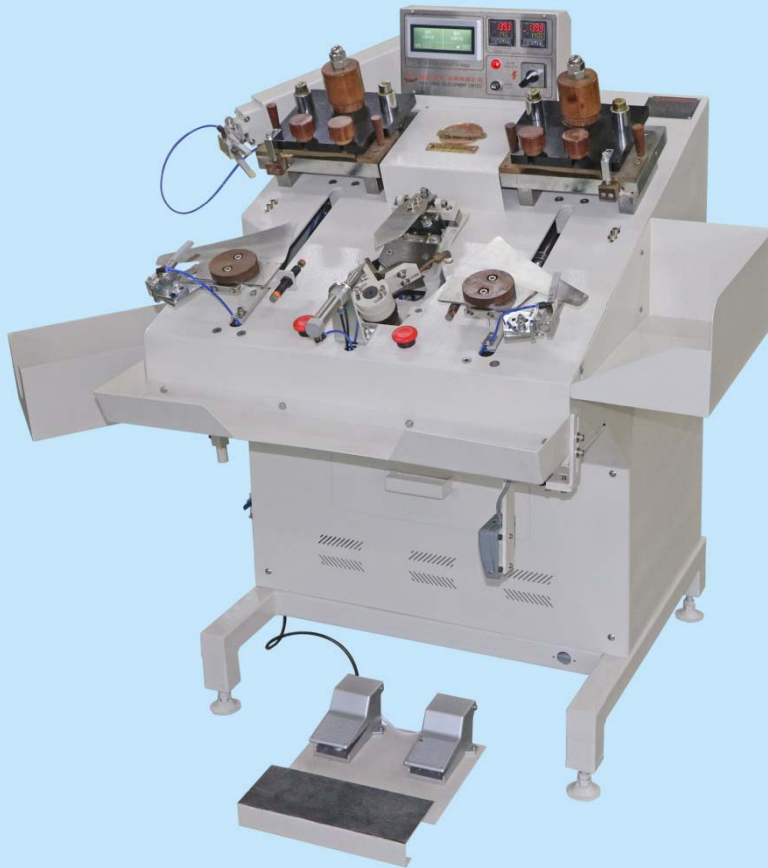

機械夾夾緊領
Automatic clamp for clamping collar tightly

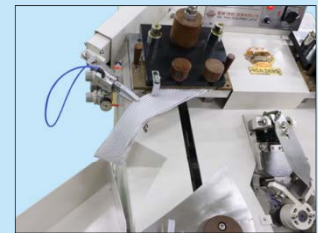

機械夾自動收料
Automatic clamp for collar stacking automatically

- 具備切領咀、反領、焗領功能
- 采用PLC控制器控制及人性化操作界面觸摸顯示屏操作
- 采用電加熱及獨立數字溫度控制器控制溫度
- 下模有定位頂針選擇開關，以滿足不同布料需求
- 具有特長的壓領模
- 采用機械夾固定領，左邊機械手輔助收料，減少人工操作
- 生產效率高，每8小時產量可達1800~2000條領
- 已安裝跟機切刀：C33-00117-3-V1 88°中間刀

選購件：

C33-00117-1 75°中間刀， C33-00117-3-V1 88°中間刀
C33-00117-4 105°中間刀

- Suitable for collar tip trimming, turning and blocking
- Adopt PLC and human friendly touch screen for operation
- Electric heated design with independent digital thermostat for temperature control
- Lower mould has selector switch for ejector pin to cater for the requirement of different fabrics
- Ultra long collar pressing mould
- With automatic clamp to fix collar and manipulator on the left side to collect material, it can reduce a lot manual operation
- High production efficiency: it could finish 1800 to 2000pcs of collars every 8 hours
- **Installed standard cutter:** C33-00117-3-V1 88° cutter

Options:

C33-00117-1 75° cutter, C33-00117-3-V1 88° cutter
C33-00117-4 105° cutter

型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率(kW) Heater Power	壓領最長(inch) Max. Pressing Length	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-89P-1	1PH/220V/50Hz	2.8	2.6	6	5	30	1310x850x1250



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,

Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078

E-MAIL: info@ngaishing.com

Fax: (852) 2785 3149

Http://www.ngaishing.com