

# Farbe 360 / Farbe 500

## 自動洗衣染色機

### Automatic Washing & Dyeing Machine



- 適用於對活性染料和亞蘇特Asutex染料的成衣染色以及對牛仔，休閒服等成衣進行石洗、酵洗
- 前置機型，採用低水比(1：6~8)洗衣染色，配合循環噴水染色系統，降低染色和洗衣成本
- 備有多規格染色缸(100L x1個，200L x1個，15Lx3個)，方便不同染色需求
- 外置間接加溫，升溫快(1.5~2 °C /分鐘)
- 設有手動小門，方便觀察檢測染色及取樣
- 帶流量計可準確控制水比
- SUS 316不鏽鋼內膽和藥水缸，可滿足不同染色及洗滌需求
- 機身可傾斜，自動卸料，減少人力
- 本機不帶脫水功能，可選購NS-2500系列工業脫水機配合使用

#### 選購件：

O-I-04-3-1電控氣動入水系統-Ø3"

- Suitable for garment dyeing with reactive dye and Asutex dye, for stone wash and enzyme wash of jeans, casual wear, and other kinds of garments
- Front loading type, low liquor ratio(1:6~8) washing and dyeing, in conjunction with circulation water spraying and dyeing system for cost reduction
- Dosing tank of different capacities (100L x1Pc, 200L x1Pc, 15Lx3pcs) are available for selection
- External indirect heating system offers fast temperature rise (1.5~2 °C /min)
- With a manual small glass window for convenient dyeing status observation and inspection
- With flow meter for accurate water level control
- SUS316 inner drum and chemical tank can satisfy different requirements in dyeing and washing process
- Machine body can tilt for automatic unloading
- This machine is not equipped with extraction function; customers can opt for NS-2500 series industrial extractor

#### Options:


O-I-04-3-1 Electric Controlled Pneumatic Water Feeding System-Ø3"




外置間接加熱及過濾系統  
External indirect heating and filtering system



Farbe染色系統(100L x1Pc, 200L x1Pc)  
Farbe dyeing system (100L x1Pc, 200L x1Pc)

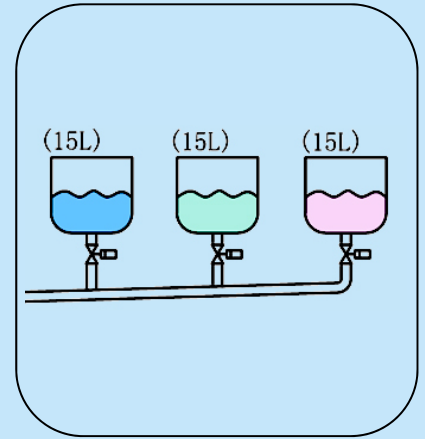

Farbe染色系統(15Lx3pcs)  
Farbe dyeing system(15Lx3Pcs)

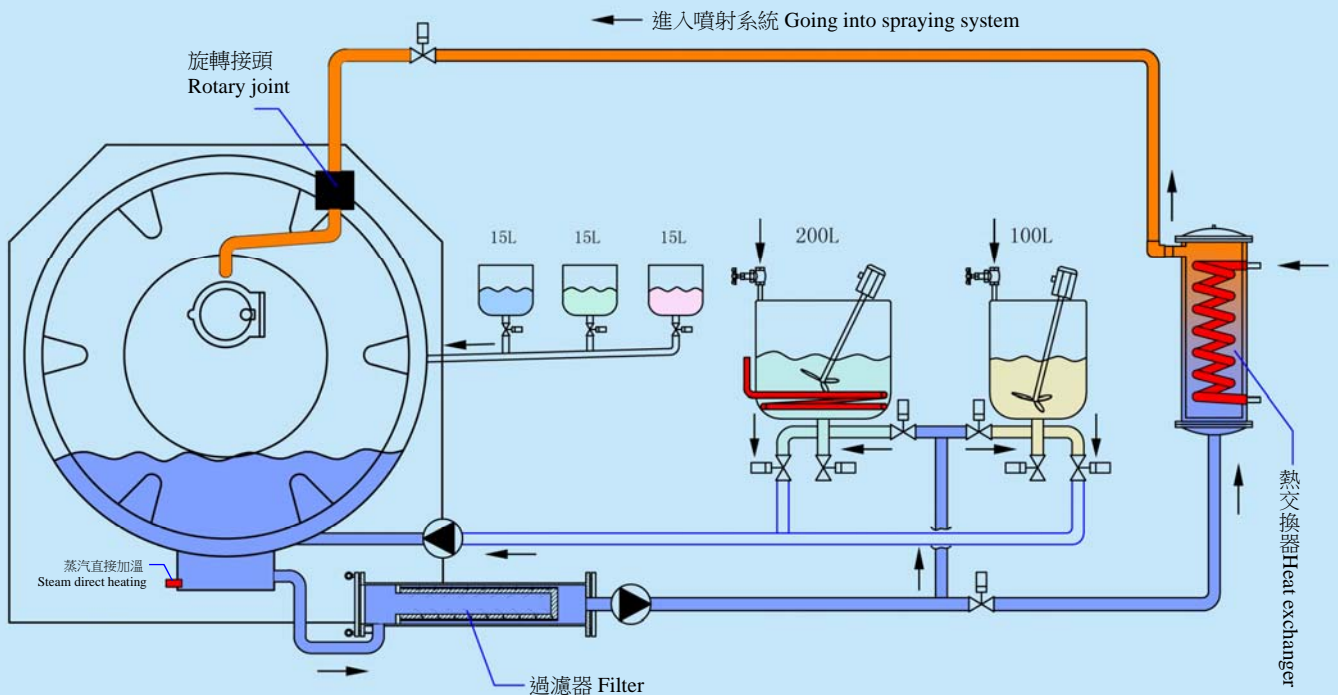

Farbe 360、Farbe 500工作原理圖 Working Principle

型號 Model	容量(kg) Capacity	內膽容積(m <sup>3</sup> ) Inner Drum Volume	電源 Power Supply	內膽馬達功率(kW) Inner Drum Motor Power	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	洗水轉速 (RPM) Washing Speed
Farbe 360	360	3.6	3PH/380V/50Hz	18.5	Ø1810×1450×4	Ø1910×1715×3	10~30
Farbe 500	500	5			Ø1980×1640×4	Ø2085×1905×3	



**藝誠(余氏)發展有限公司**  
**Ngai Shing Development Limited**

香港九龍長沙灣永康街52號地下  
G/F., 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com  
Fax: (852) 2785 3149 Http://www.ngaishing.com